




GENERAL INFORMATION


The SYLVA C is a vertical column luminaire engineered from extruded aluminum to deliver uniform 360° Type V illumination for large-scale exterior environments such as plazas, campuses, and walkways. With multiple height and wattage options, IP65 protection, and 0-10V dimming, it offers architectural presence, durability, and flexible lighting performance in a cohesive system.

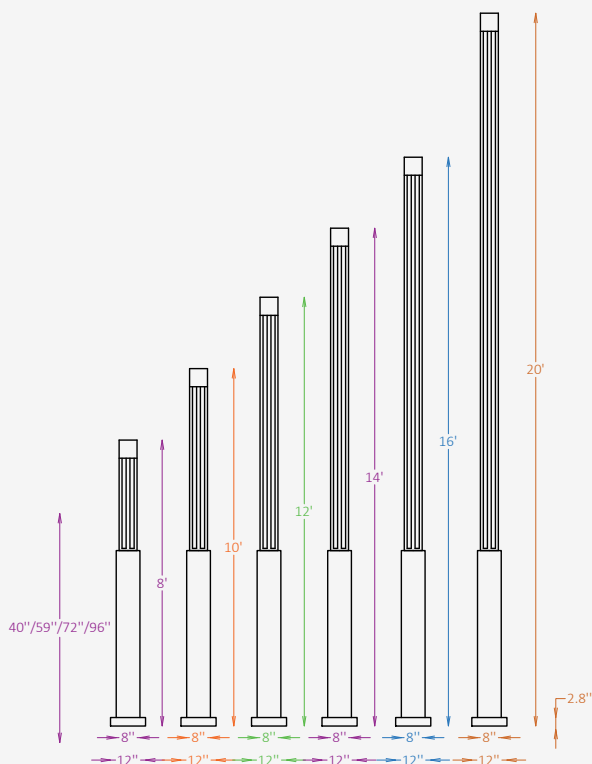

SPECIFICATIONS

Material	Extruded Aluminum
Lens	N/A
Length / Width	8"
Overall Height	8' / 10' / 12' / 14' / 16' / 20'
Base Height	40" / 59" / 72" / 96"
Light Source Type	LED
Power	23W / 35W / 45W / 60W / 85W
Input Voltage	110-277V, 50-60 Hz
LED Output	60 lm/W
CCT	2200K / 3000K / 3500K / 4000K / 5000K
CRI	90
Dimming & Driver	Integral, 0-10V
Light Distribution	Type V 360° symmetrical light distribution
IP Rating	IP 65
Warranty	5 years
Finishes	16 standard finishes 8 wood-effect finishes 12 metallic finishes Custom on request*
Operating Temp.	-40°C to +50°C (-40°F to +122°F)

OTHER VERSIONS AVAILABLE

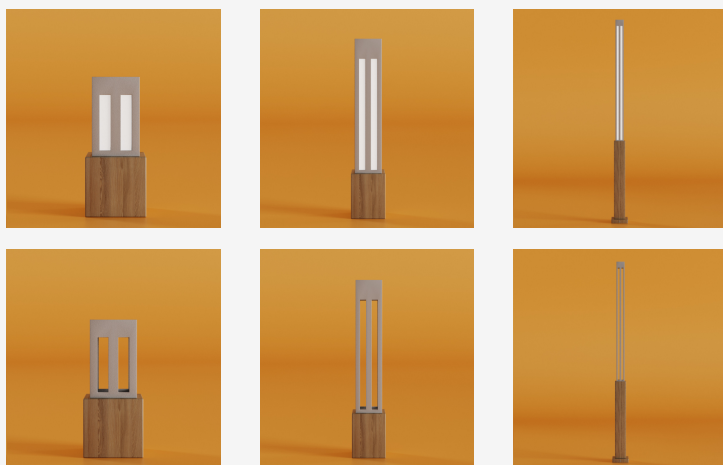

CERTIFICATION



Ordering Information


Select one item from each category below. If your desired option is unavailable, please contact our team for support or custom solutions.

Code	Length / Width	Overall Height	Base Height		
☒ SLV-C Column	☐ 8 8" x 8" ☐ CUS Custom on request _____	☐ 8 8' ☐ 10 10' ☐ 12 12' ☐ CUS Custom on request _____	☐ 14 14' ☐ 16 16' ☐ 20 20' ☐ CUS Custom on request _____	☐ 40 40" ☐ 59 59" ☐ CUS Custom on request _____	☐ 72 72" ☐ 96 96" ☐ CUS Custom on request _____
Material	CCT	Wattage / Lumens	Light Distribution		
☒ AL Extruded Aluminum + PMMA	☐ 22 2200K ☐ 30 3000K ☐ 35 3500K ☐ 40 4000K ☐ 50 5000K ☐ CUS Custom on request _____	☐ 23 23W / 1,380 lm ☐ 35 35W / 2,100 lm ☐ 45 45W / 2,700 lm ☐ 60 60W / 3,600 lm ☐ 85 85W / 5,100 lm ☐ CUS Custom on request _____	☒ LD5 Type V 360° symmetrical light distribution		
Dimming	Body Finish Option	Base Finish Option	Mounting		
☐ NN Non-Dimmable ☐ DM 0-10V	☐ ST Standard _____ ☐ WE Wood effect _____ ☐ MC Metallic _____ ☐ CUS Custom on request _____	☐ ST Standard _____ ☐ WE Wood effect _____ ☐ MC Metallic _____ ☐ CUS Custom on request _____	☒ AB Anchored Base		
Finish Type					
☐ GL Glossy ☐ MT Matte					

Note: Total height includes both the illuminated lens and the base. Lens height will automatically adjust based on the selected total height and base height.

Finishes


Standard finishes

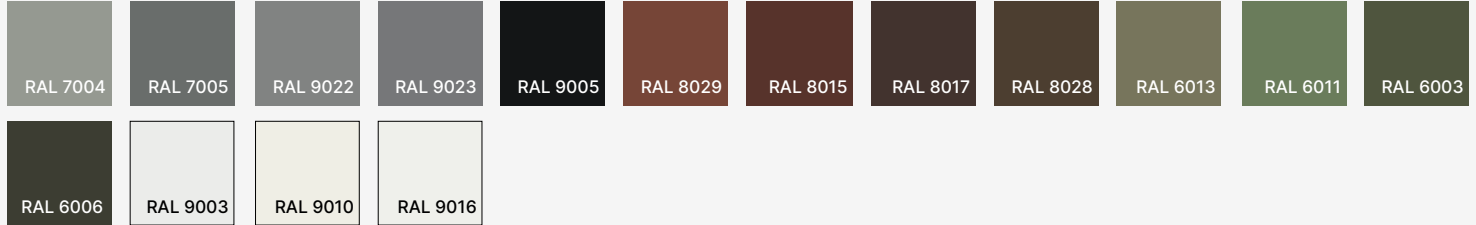

Wood-effect finishes




Metallic finishes



RAL K7 CLASSIC COLORS (80-95% GLOSS): RAL_ _ _ _


All RAL Classic colors are available with no setup fee.

On your specification submittal, choose your RAL color by entering the 4-digit RAL code (e.g., RAL 3003).



Bolt Patterns

for Anchored Base Installation

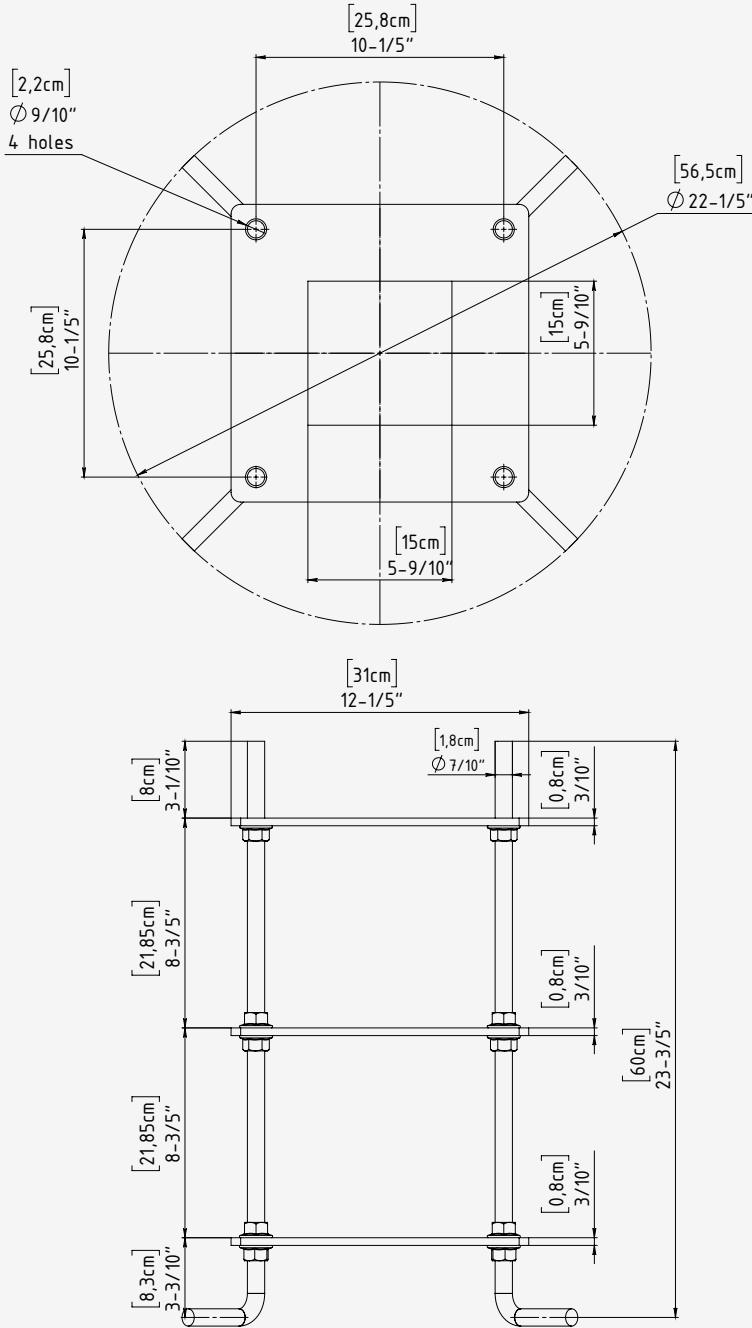

Mounting Type	Anchored Base
Base Plate Material	Stainless Steel
Bolt Mounting Circle	Ø: 4-7/10"
Number of Anchor Kit	4 equally holes (90° apart)
Anchor Kit Size	3/8"-16 x 10" L-Hook concrete anchor bolt

Installation Notes:

- Pour Concrete Footer and Set Anchors
- Prepare the concrete footer formwork. (The footer size should be determined by local frost depth and soil conditions.
- Recommended minimum size: 12" diameter × 20" depth.) Before pouring, assemble the galvanized steel L-bolt anchors with the included steel mounting plate.
- Position the assembly inside the formwork.
- As concrete is poured, insert the anchor assembly into the wet concrete using the mounting plate to ensure correct positioning and alignment.
- Allow clearance through the center opening for electrical wiring, and ensure future access to bolt heads if they will be concealed.
- Ensure all anchors are properly aligned and fully embedded. Allow the concrete to cure completely before proceeding.