


DOUBLE LOOP COUPLING DKPS 2928/3835



Screw hubs


Technical data		DKPS 2928	DKPS 3835
Max. speed	min ⁻¹	3.000	3.000
Max. torque	Nm	0,5	1,5
Max. offset off shafts			
radial	mm	± 2	± 2,5
axial	mm	± 2	± 3
angular	Grad	± 10	± 10
Torsion spring stiffness	Nm/rad	13	25
Radial spring stiffness	N/mm	13	15
Moment of inertia	gcm ²	41	104
Max. M / clamping torque	Ncm	100	200
Temperature range	°C	-30 / +80	-30 / +80
Weight appr.	g	33	48
Material	flange	steel galvanized	
Connecting element		polyurethane - hytrel ®	

REACH/ RoHS compliant

M=tightening torque of the set screws

High resistance to oils, fuels, ozone and weather influences./ Keyways from 6 mm bore possible on request.

DKPS 2928

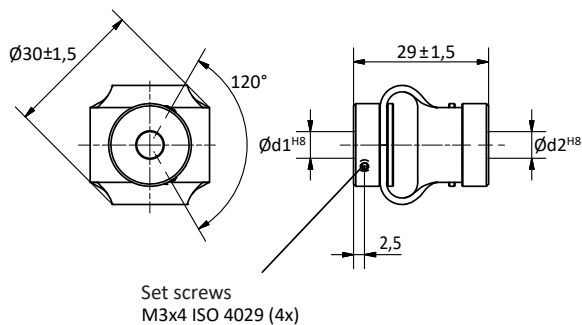

Bore combinations DKPS 2928					
d1 / d2	4	5	6	8	10
4	X	X	X	X	X
5		X	X	X	X
6			X	X	X
8				X	X
10					X
Example DKPS 2928 08/10					