

EP-8800-HA-UD/20~35

MV Turnkey Solution for 1500V Utility PV Plant



More power generation

- Inverter Max. efficiency 99%, Euro efficiency 98.7%
- 1500Vdc PV system reduce power loss
- High DC/AC ratio up to 1.8



Low system cost

- Convenient for large block size PV plant
- Integrated MV transformer and switchgear
- Night SVG function optional



High reliability

- Key components at front side, easy for maintenance
- Current sensor for each DC input, more reliable for monitoring and control




Grid friendly

- Adjustable reactive power
- Low harmonics and fast response for grid regulation



Circuit Diagram

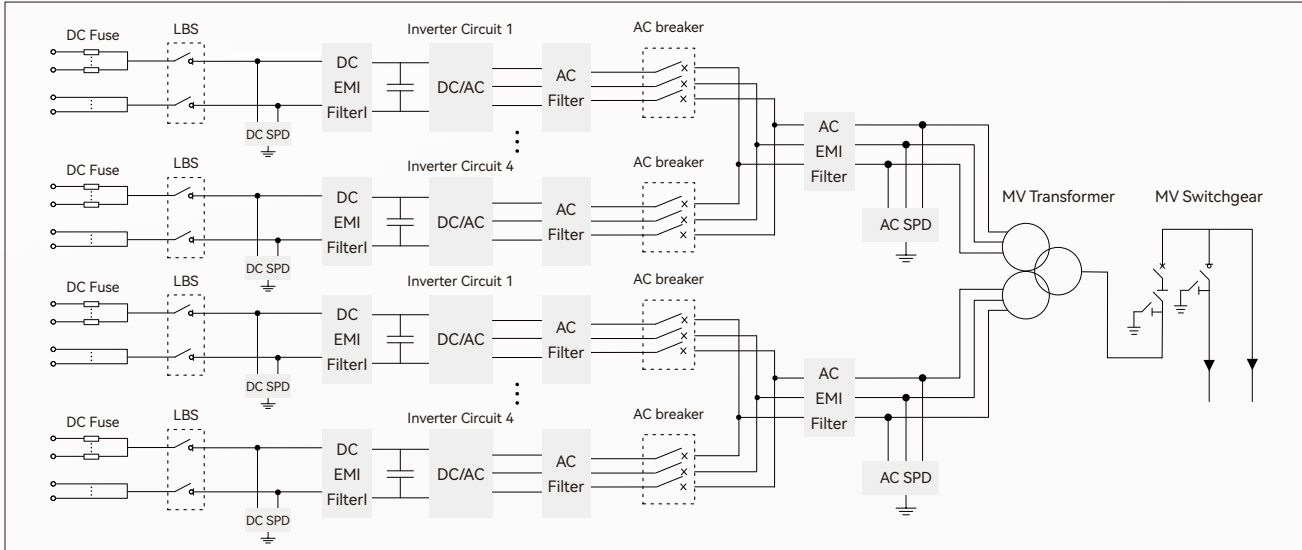

ModelEP-8800-HA-UD/20~35	
Input (DC)	
Max. PV input voltage	1500V
Max. input current	5736A*2
MPP voltage range for nominal power	900~1300V
Number of MPPT trackers	4*2
Number of DC inputs	40 (Maximum: 64 inputs)
Output (AC)	
AC output power	2*4400kVA@45°C/2*5060kVA@25°C
AC voltage range	20~35kV
Rated grid frequency/range	50 Hz/45~55 Hz, 60Hz/55~65 Hz
Output current harmonic (at nominal power)	<3%
DC current injection	<0.5% In
Power factor at nominal power/range	>0.99/0.8 lagging to 0.8 leading
Protection	
DC input protection	Load break switch+fuse
AC output protection	Circuit breaker
AC MV output protection	Circuit breaker
Over voltage protection	DC Type II/AC Type II
Leakage current monitoring	Yes
Grid monitoring/Ground fault monitoring	Yes/Yes
Insulation monitoring	Yes
Overheat protection	Yes
Night SVG function	Optional
Anti-PID function	Optional
Efficiency	
Max. efficiency	99.0%
EU efficiency	98.7%
Transformer	
Transformer rated power	8800kVA
Transformer max. power	10120kVA
LV/MV voltage	0.63-0.63/20~35kV
Vector group	Dy11y11
Transformer cooling type	ONAN (Oil Natural Air Natural)
General Data	
Auxiliary power supply	Standard: 5kVA, Optional: max. 40kVA
Protection level	Inverter: IP65, Others: IP54
Temperature	-30 ~ + 60°C
Allowed humidity (non condensing)	0~95%
Cooling method	Temperature controlled forced air cooling
Max. operating altitude	2000m (standard) />2000m (optional)
Display	Standard: LED indicator, Bluetooth+APP; Optional: Touch screen
Communication port	Standard: RS485/Ethernet; Optional: Optical fiber
Certificates and approvals (more available on request)	CE, IEC 62109, IEC 61727, IEC 61683, IEC 62116, IEC 60068, IEC61000, IEC60076, IEC62271
Dimensions (W×H×D)	12192×2896×2438mm
Weight	30t