

Cabin Frame



Shaft roof: Warm light white

Fence panel in shaft: Warm light white

Aluminum derrick: Five colors are available

Cabin frame: Same as aluminum alloy derrick

mount : Three options are available

Xizi Elevator Technology Co., Ltd. is a comprehensive elevator manufacturing enterprise integrating research and development, manufacturing, sales, installation and after-sales service. With 40 years of accumulation in the elevator industry, the brand has three platforms: technology research and development center, intelligent manufacturing center and quality testing center. Guided by green manufacturing and smart digital technology, the brand always adheres to the corporate mission of "creating infinite possibilities for construction and transportation".

西子电梯科技有限公司
XIZI ELEVATOR CO.,LTD.

Add:NO.2329 Science and Technology Avenue, Lin 'an
Economic Development Zone, Hangzhou City, China

Lin'an Economic Development Zone, Hangzhou, China
www.xizielelevator.com

☎:400-826-1112

This book is a general information print product (version: April 2025, first edition, April 2025, first printing). We reserve the right to change the product technology and instructions at any time. The sample content is for reference only, and the actual content and physical objects shall be subject to the agreement between the two parties.

XIZI2504



XIZI 西子电梯

i520 Plus-G
Home Platform Ladder

Make a promise of happiness to your family

MAKE A HAPPY PROMISE TO MY HOME

Cabin Decoration



Model: U-CR939

frame :
Powder coated steel plate (same color as derrick)
furred ceiling :
Mirror stainless steel + linear lamp
jamb wall :
glass
paries posterior :
Orange leather + beige leather hard case
handrail :
Orange leather + mirror stainless steel
terrace :
Polyester carpet
COP:
U-CF3700 13.3 inch white touch display



Model: U-CR940

frame :
Powder coated steel plate (same color as derrick)
furred ceiling :
Mirror stainless steel + linear lamp
jamb wall :
glass
paries posterior :
Off-white leather + wall cloth
handrail :
Off-white leather + mirror stainless steel
terrace :
Polyester carpet
COP:
U-CF3700 13.3 inch white touch display



Model: U-CR941

frame :
Apple sand paint
furred ceiling :
Acrylic large surface light source
jamb wall :
glass
paries posterior :
Decorative painting + hidden light strip + glass + apple sand wave grating
terrace :
Tempered glass screen printing
COP:
U-CF6600 4.3-inch TFT-LCD display

Cabin Preferred



Apple sand paint (custom)



Warm light white (standard)



champagne gold



Rose silver sand



Titanium black

The Lobby Area



Electric double door (standard)





Electric single door



LOP
Model: ZW6400
Button: Touch button
Panel: Silver aluminum alloy + tempered glass
Installation method: wall hanging

Civil Construction Parameters

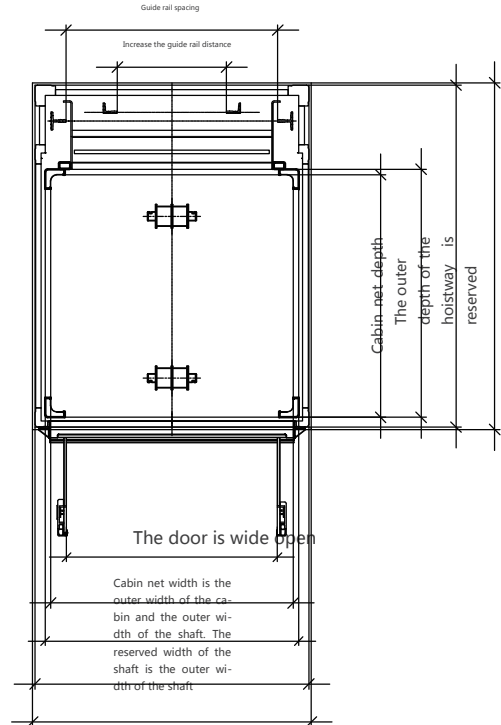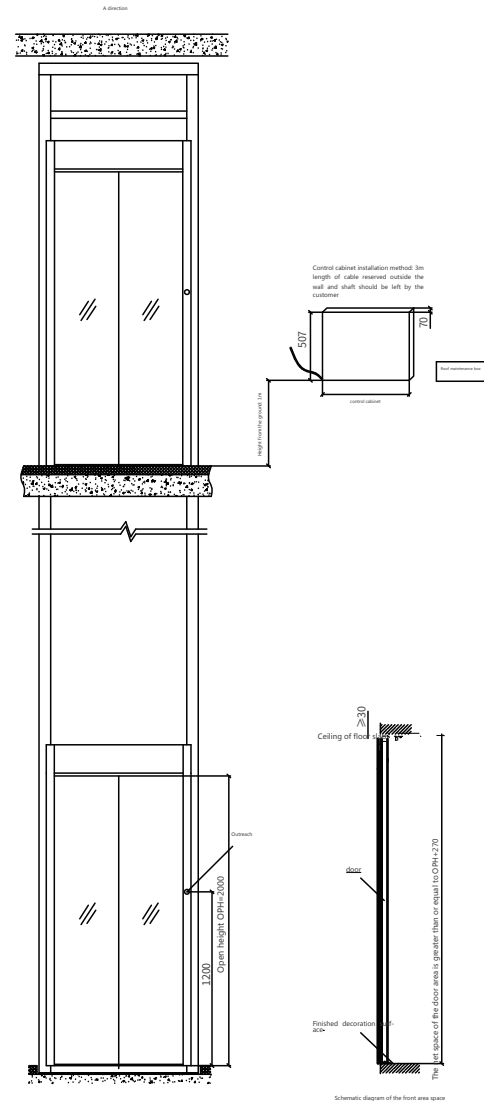

Cabin floor plan

load	Open the door	Door system	The shaft is wide outside	The shaft is deep outside	Cabin net width	cabin net depth	Keep the door open	Top height	Carriage net height	Depth of the bottom pit	Wellway reserved width	Reserve depth of shaft
250kg	front	Single door	1010	1150	880	740	820	2750	2100	100	1030	1170
		double door					750					
	side	Single door	1240	1010	830	880	750				1260	1030
		double door	1310		900		1330					
320kg	front	Single door	1130	1410	1000		780				1150	1430
		double door					870					
	side	Single door	1410	1130	1000		760				1430	1150
		double door					850					
400kg	front	Single door	1380	1480	1250	1070	850	2750	2100	100	1400	1500
		double door					900					
	side	Single door	1480	1380	1070	1250	800				1500	1400
		double door					920					

Premium configuration

control cabinet

way to install
Standard side wall mounting.



Improve space utilization
Small size, easy to install, improve space utilization.

energy conservation and environment protection
Standby power consumption is low, energy saving and environmental protection.

Comfort and luxury
Equipped with contactor technology, enjoy the Immersive elevator experience.

Composite steel strip

High-tech, new wear-resistant polyurethane wrapped steel wire rope, no grease lubrication, longer life, green environmental protection.



Security guard



Screen protection function

During the operation of the elevator, infrared is scanned in real time. When the light is disturbed, the elevator immediately stops running to protect the safety of passengers.



ARD power failure rescue function

In case of power failure, the ARD module automatically recognizes and enters the rescue mode. Ensure the safe operation of the elevator and release people at the nearest level.



One-click call for help function

You can set up a maximum of 3 emergency contacts in advance when the elevator is encountered. In case of failure, you can call for help with one key and dial repeatedly until you get through.



Door anti-clamp protection function

Intelligent detection of elevator doors. When the door encounters obstacles during the closing process, the door will automatically open to protect the safety of entering and exiting.

Energy saving host

energy-efficient

The low power host and low standby power consumption have achieved energy saving to a large extent.

space optimization

The new model of rare earth permanent magnet synchronous gearless energy saving host is configured, and the volume of the host is reduced by 70%-80% compared with the ordinary host.

The operation is stable

The traction wheel of the main unit adopts arc profile design and the surface coating treatment of the spokes to make the elevator run more stable.



Absolute position control system

The control is more accurate and stable, the control accuracy reaches 0.0625mm; the speed detection accuracy reaches 0.025 m/s.



Smart features



Call for help

You can set a password for the designated floor.



Real-time update function

Time and weather are updated in real time (network connection required).



Entertainment features

Multiple themes are available and music can be played.