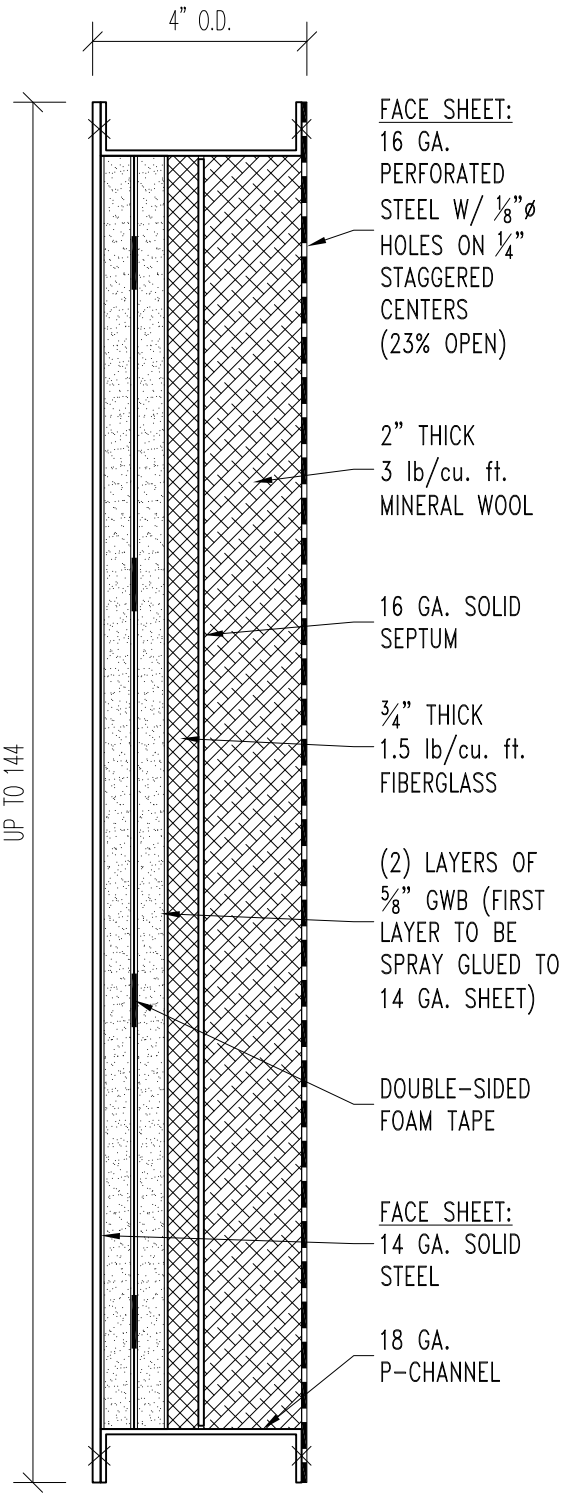


H/S/P-43b PANEL

QuietMOD H/S/P-43 PANEL DESCRIPTION:

- PANEL IS 4" THICK WITH SOLID SKIN ON ONE SIDE AND A PERFORATED SKIN ON THE OTHER.
- ENTIRE PANEL IS CONSTRUCTED WITH "PAINT READY" A-60 GALVANNEAL OR G-90 GALVANIZED STEEL
- FACE SHEETS ARE SPOT WELDED TO THE PANEL FRAMING CHANNEL
- ALL STIFFENERS AND CHANNEL FRAMING ARE FORMED FROM A MINIMUM OF 18 GA. STEEL

SOUND TRANSMISSION LOSS, dB

OCTAVE BAND CENTER FREQUENCIES (Hz)	125	250	500	1K	2K	4K	STC
QuietMOD H/S/P-43 PANEL	27	32	40	50	58	64	43

*All testing conducted by Riverbank Acoustical Laboratories
*All data in accordance with ASTM E90-99 and E413-87

weight = 11.13 lbs/sq.ft.

Riverbanks Test No. TL14-434
Test Date: 12-5-2014

NOTICE

Drawings and product details are for information and/or illustrative purposes only, and may vary. Please contact your local Memtech representative for the most current product information.

QUIETMOD H/S/P-43 ACOUSTIC WALL PANEL DETAIL

PROJECT:			TYPE:
SUBMITTED BY:		DATE:	ISSUE:
APPROVED BY:		DATE:	PROJECT No.:
PROJ. MGR.	SHEET:		

Memtech Acoustics
2175 Avon Industrial Dr.
Rochester Hills, MI 48309
248.289.1123
memtechacoustics.com