



<b>Engine</b>	Kubota D1105-E4B
<b>Gross Power</b>	18.5 kW (24.8 hp / 25.2 ps ) @ 3,000 rpm
<b>Net Power</b>	17 kW (22.8 hp /23.1 ps ) @ 3,000 rpm
<b>Breakout Force</b>	9 kN
<b>Rated Operating Capacity</b>	380 kg
<b>Bucket Capacity</b>	0.17 m³
<b>Operating Weight</b>	1,440 kg

## 335C SKID STEER LOADER

TOUGH WORLD. TOUGH EQUIPMENT.

# 335C SPECIFICATIONS >>>

## ENGINE

Emission Regulation	CN IV
Manufacturer	Kubota
Model	D1105-E4B
Gross Power	18.5 kW (24.8 hp / 25.2 ps) @ 3,000rpm
Net Power	17 kW (22.8 hp / 23.1 ps) @ 3,000rpm
Peak Torque	71.5 N·m @ 2,200rpm
Number of Cylinders	3
Displacement	1.123L
Cooling Type	Water

## ELECTRICAL SYSTEM

System Voltage	12 V
Alternator Output	65 amps

## CHAIN TANK

Drive Chain Size	60 HS
------------------	-------

## TIRES

Ply Type	Solid
Tire Size	570x160
Ply Rating	/

## HYDRAULIC SYSTEM

System Type	Open
Standard Flow	36 L/min
Traveling Hydrostatic Pressure	25 MPa
Working Hydrostatic Pressure	21 MPa
Hydraulic Cycle Time, total	6.6 s
Raise	3.1 s
Dump	2.1 s
Lower (float down)	1.4 s

## OPERATING WEIGHT

Operating Weight	1,440 kg
------------------	----------

## PERFORMANCE

Static Tipping Load	760 kg
Rated Operating Capacity	380 kg
Boom Breakout Force	9 kN
Bucket Breakout Force	8.15 kN
Dump Clearance at Full Height Discharge	1,877 mm
Dump Reach at Full Height Discharge	435 mm
Maximum Dump Angle at Full Height	34°
Maximum Hinge Pin Height	2,445 mm
Bucket Rollback at Ground Level	22°
Ground Clearance	166 mm
Angle of Departure	24.5°
Front Clearance Radius with Bucket	1,566 mm

## SERVICE CAPACITIES

Fuel Tank	25 L
Engine Oil	4 L
Cooling System	7 L
Hydraulic Reservoir	20 L
Hydraulic System Total	25 L
Chain Tanks, Each	5 L

## OPTIONAL ATTACHMENTS


4 in 1 Bucket – 0.4 m <sup>3</sup>	Auger
Rock Bucket – 0.4 m <sup>3</sup>	Snow Blade
Scrap Bucket – 350 to 650 mm	Pick - up Sweeper
Hydraulic Hammer	Hydraulic Shear
Fork	Lift Boom

## STANDARD EQUIPMENT

General Bucket – 0.4 m <sup>3</sup>
Control Safety Interlock
Boom Interlock
Quick Coupler
Open ROPS/FOPS Cab
Flow Standard – 69 L/min

## OPTIONAL EQUIPMENT

Enclosed ROPS/FOPS Cab with AC
Solid Tire
Tire Chains
Heater
A/C

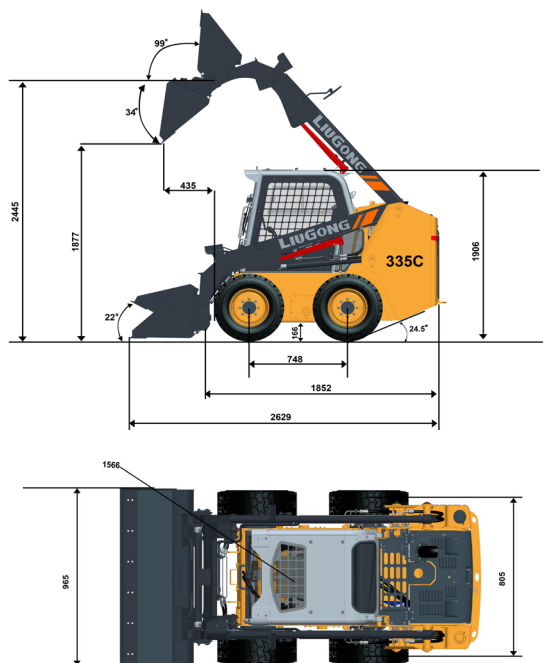

Guangxi Liugong Machinery Co., Ltd.

No. 1 Liutai Road, Liuzhou, Guangxi 545007, PR China  
T: +86 772 3886124 E: overseas@liugong.com  
www.liugong.com

Specifications and designs are subject to change without notice. Machines shown may include optional equipment. Liugong standard and optional equipment may vary from region to region. Please consult your Liugong dealer for information specific to your area. Engine power kW is converted to horsepower (1 kW=1.3596 ps and 1 kW=1.3410 hp) in this file.

10/2024 Designed by Liugong