
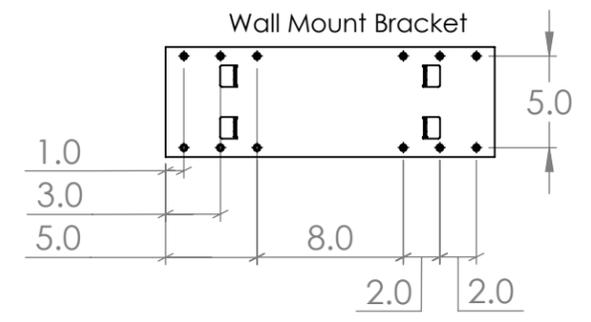
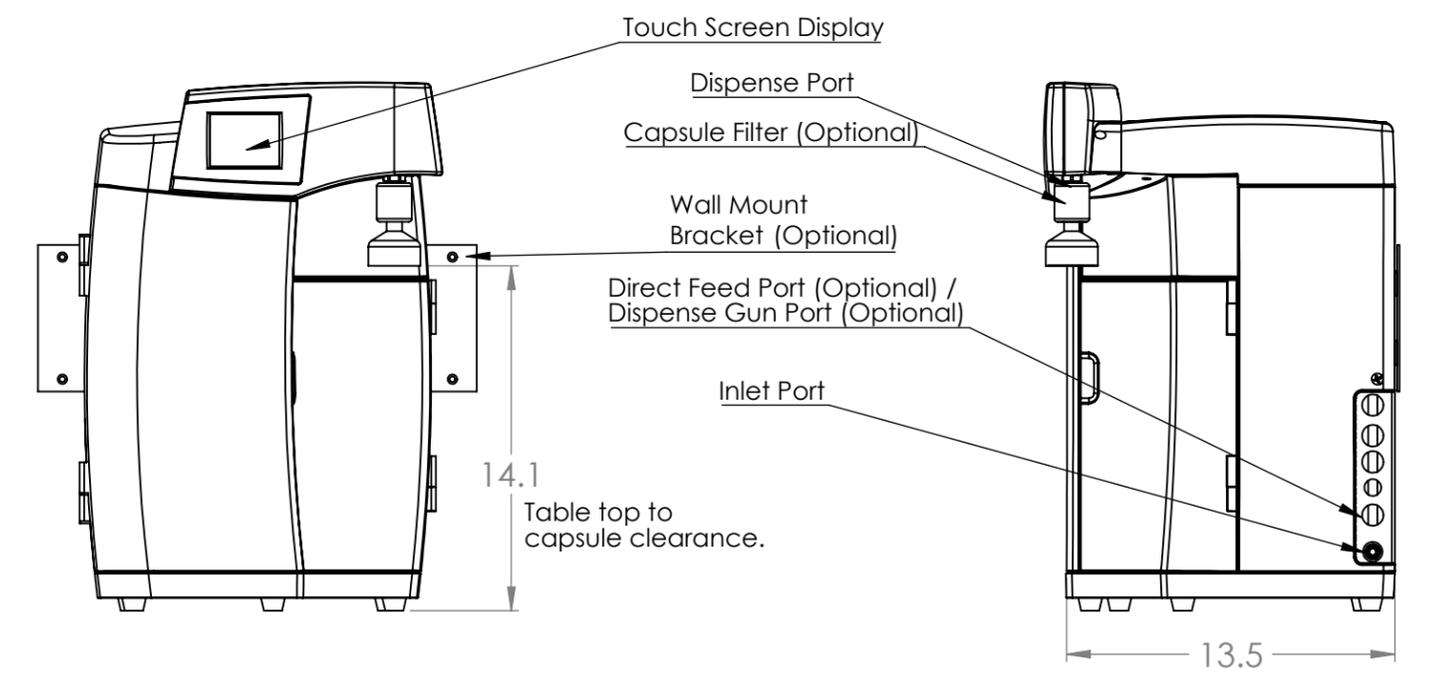
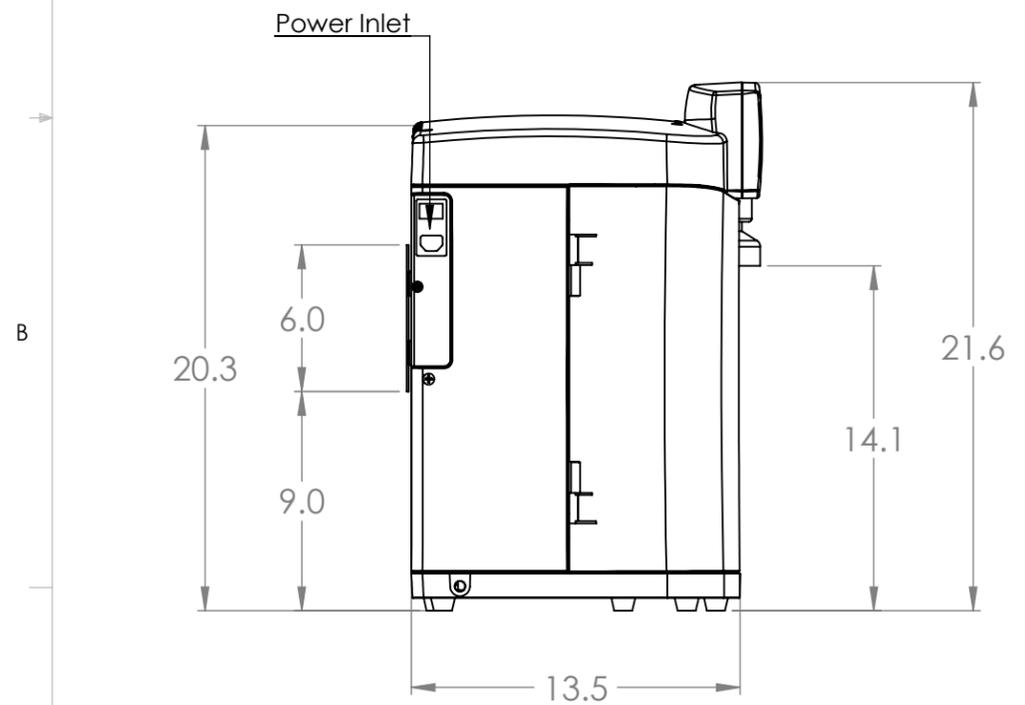


Counter Top and Wall Mount Options Shown

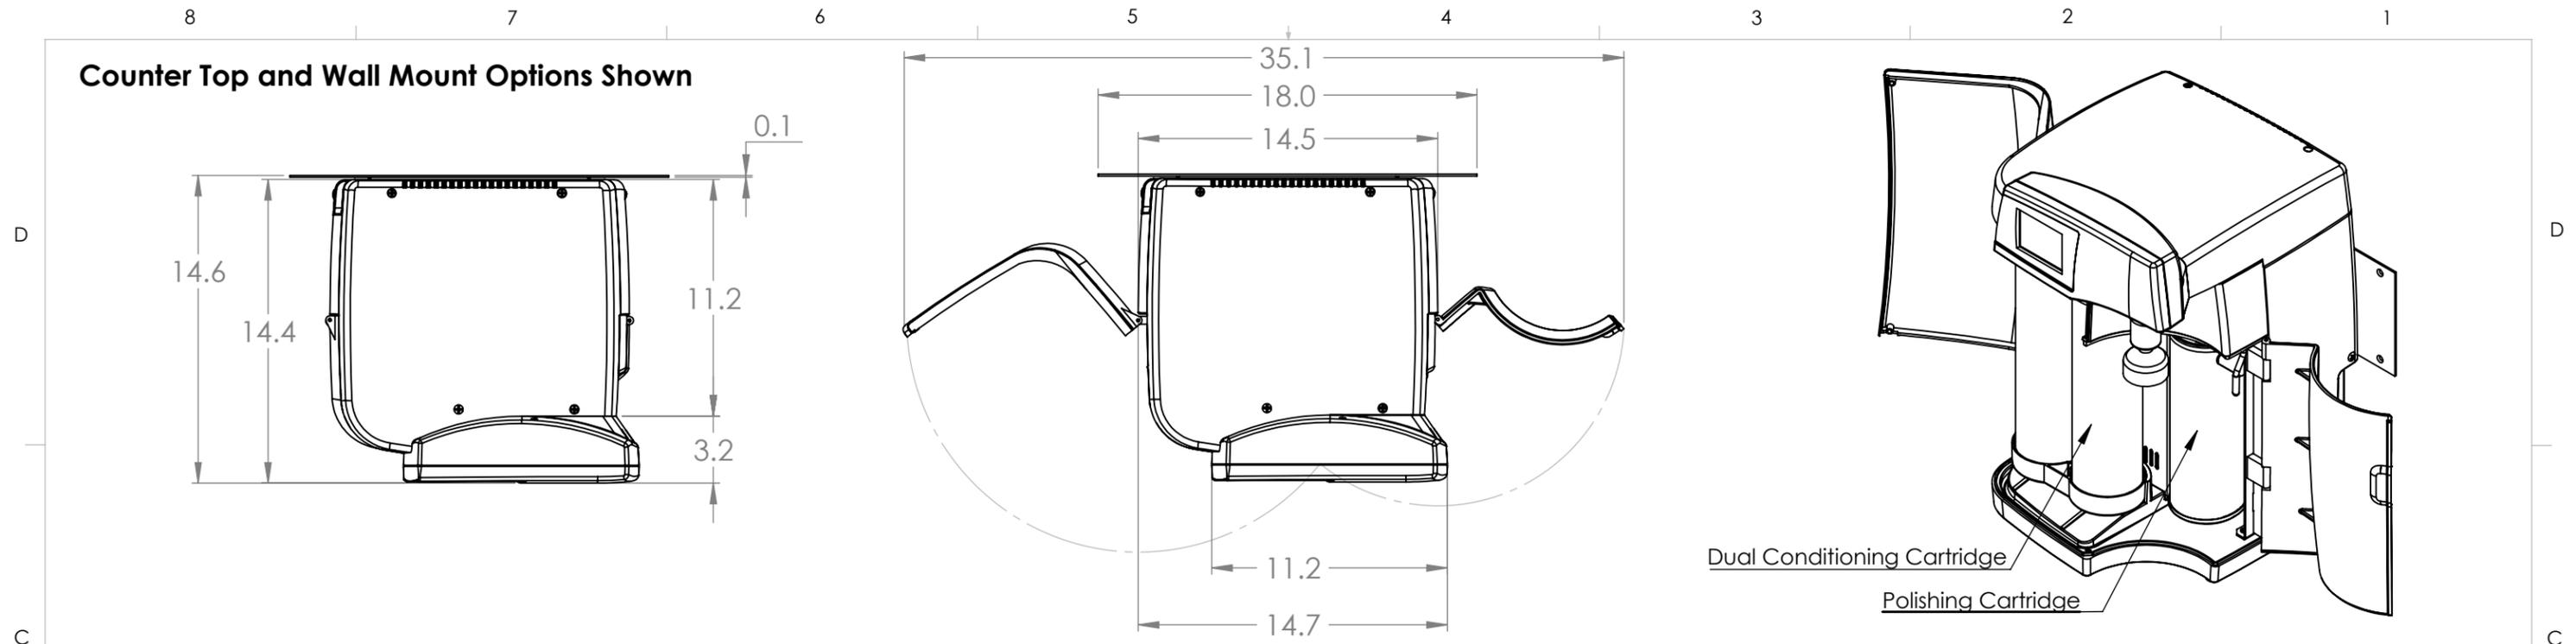

Requirements:

- GFI within 6 feet
- Feed water within 6 feet
- Drain within 6 feet

NOTES:

- **WEIGHT** - 42 LBS. DRY / 47 LBS. OPERATING
- **INLET CONNECTION** - 3/8" O.D. TUBING
- **POWER REQUIREMENTS:**
 - "1" - 120 VAC / 60 HZ @ 1.0 AMP
 - "2" - 220VAC / 50 HZ @ 0.5 AMP
- **PRESSURE** - 90 PSIG MAXIMUM / 20 PSIG MINIMUM
- **TEMPERATURE (MAX)** - 100 DEGREES F.
- **FLOW RATE** - 2.5 LPM (< 2.0 LPM WITH ULTRAFILTER AND/OR ENDOTOXIN FILTER INSTALLED)

NAME		DATE		RESINTECH INC	
DRAWN		R DURBANO		CAMDEN, NJ (856) 768-9600	
DIMENSIONS ARE IN INCHES					
UNLESS OTHERWISE SPECIFIED:					
TITLE:				CLiR-5000 SERIES	
				ULTRA HIGH-PURITY	
				WATER SYSTEM DIMENSIONS	
DWG. NO.		STANDARD AND WALL		REV	
SCALE: 1:7		BRACKET CONFIGURATIONS		2	
				SHEET 1 OF 2	

