

Instructions for use
—Type 3 Flush Fix



Type 3 Flush button-fix


The Button-fix concept is simple: the Fixes are attached to the back of one panel and the mating Buttons are attached to the other. Bring the panels together and push until they 'click'.

The Type 3 Flush Fix is moulded in PBT, and the Button in durable Acetal. They securely connect parallel panels with a simple push on/pull off engagement, requiring no gap either above or at the side of the removable panel. Type 3 Flush is designed for applications where panel-panel contact is required and fits a simple oval rebate. The Fix can be rebated into the face of a panel of at least 18mm thick.

Visit the website for more information on the complete Button-fix range, including videos of the Type 3 Flush Button-fix in use and CAD downloads.

You can also obtain a new copy of these instructions from the website in the event of loss or in the event that Buttonfix modifies the instructions.

Buttonfix Limited retains the right to modify the instructions as it deems appropriate and the consumer is responsible for checking the website for the latest information.

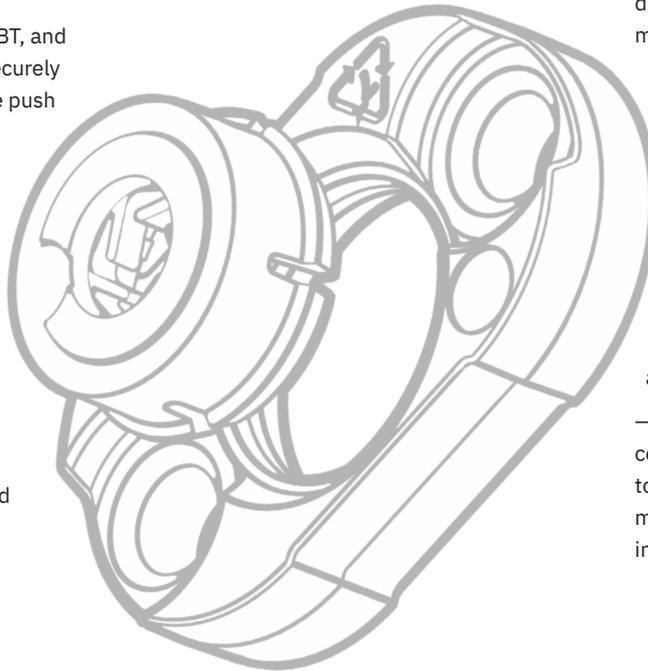

Warnings

—Button-fix is intended for furniture construction and interior fittings and is not intended, nor should it be used, for any other purpose.

—**WARNING:** Serious damage to property and severe bodily injury can result from (1) improper use, application or installation of the Button-fix or (2) use as part of improperly designed or constructed assemblies or materials.

—Provided that the screws and substrate are properly matched, and all other instructions complied with, independent tests showed that a vertical panel fixed with four Type 3 Fixes can support loads weighing up to a maximum of 60kg (132 lbs). For critical applications it is essential to perform your own tests.

—Avoid any contact with aggressive solvents and cleaning products.

—It is not possible for Buttonfix to warn the consumer about every possible danger related to use of the Button-fix and the consumer must use his or her own good judgment when installing and using Button-fix.

The fix





Type 3 Flush Button-fix connects parallel panels with a straight push on/pull off action. Ideal for installations where the panel geometry does not suit the sliding engagement of the Type 1 fasteners and where there is no clearance around the panel.

Face-rebated fix

The Fix may be rebated into the face of a panel of at least 18mm thickness. An oval rebate measuring 24 x 40 x 8mm is required, the same size rebate required for Type 1 (if using the Multijig). **Do not exceed 8mm depth for the rebate!** The Fix may be orientated horizontally or vertically, depending on the application. See the screw fixings guide on page 6.

Surface-mounted Fix



In some circumstances you may chose not to rebate the Fix, mounting it directly to the surface. This creates an 8mm gap between the panels.

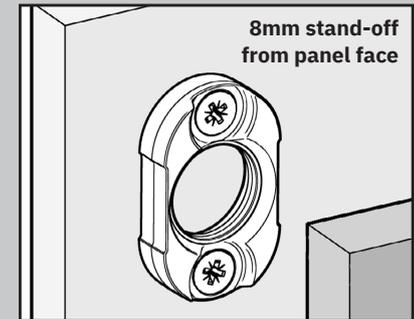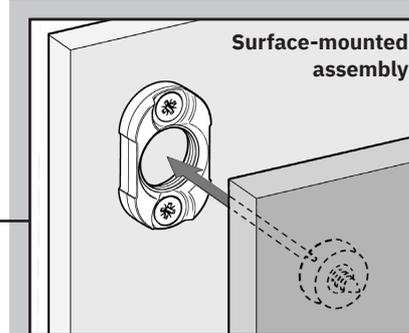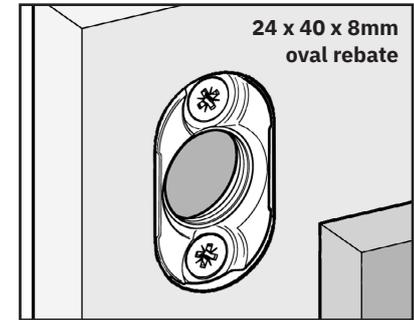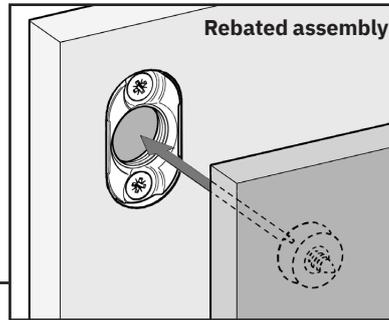

'Multijig' router jig accessory

A router jig can be ordered separately for accurately machining the rebate: use the middle 'Type 1' aperture.

The jig is designed for use with a metric 12mm cutter and 16mm guide bush. Read the separate instructions supplied with the accessory before use.

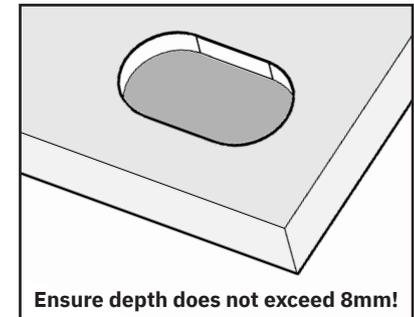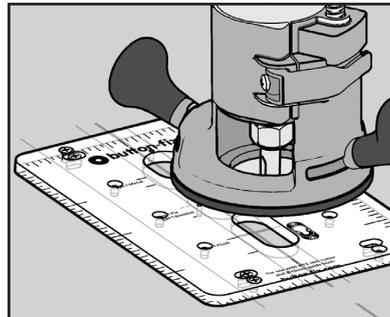

The button

The fixing hole on the Button has flexible fingers, which centre the fixing screw but allow the Button to 'float', to take up any tolerance in the installation. This requires pan head or flange head screws to work effectively and to allow movement (see the screw fixings guide on page 6).

Do not overtighten the Button screw – only tighten the screw lightly. We do not recommend countersunk screws for attaching the Button.






Button marker accessory

The Button marker accessory helps to mark out where to install the Buttons, without the need for measurement. Type 3 uses the same Button marker as all the Type 1 Fixes.

Once you have attached the Fix (see page 3), insert a marker into each one. Then position the second panel and press firmly – the markers will leave indents in the panel surface, which can be used as guides for positioning the Buttons. On surfaces that don't easily show marks, such as heavily textured or rough surfaces, apply a layer of masking tape or Gaffer tape onto the surface, which will show the indents more clearly.

Remove the markers using a small flat-blade screwdriver.

The markers can be re-used to mark out the next panel.

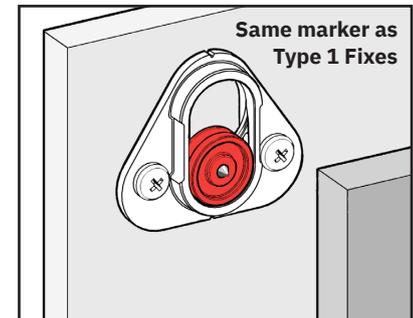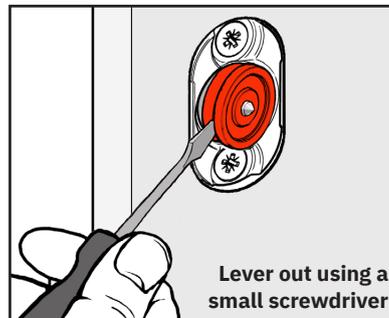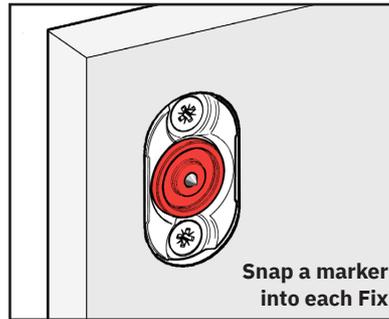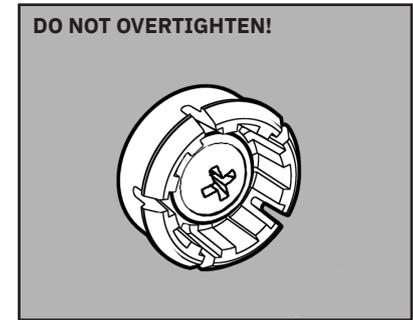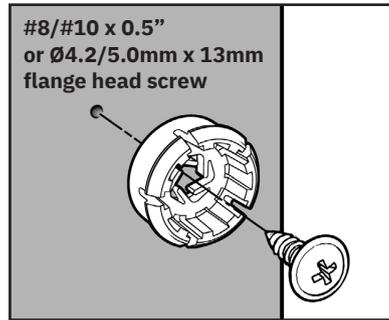

Suggested layout and loading guide

—**Wall Panels:** As an approximate guide, we suggest that Button-fix centres are no greater than 600mm apart and no closer than 35mm to the edge of the panel.

Four Type 3 Button-fixes can support a wall panel of up to 60kg in normal conditions*. As a general rule, allow for a maximum loading of **15kg per Fix.**

—**Ceiling Panels:** As an approximate guide, we suggest that Button-fix centres are no greater than 400mm apart and no closer than 35mm to the edge of the panel.

Four Type 3 Button-fixes can support a ceiling panel of up to 10kg. As a general rule, allow for a maximum loading of **2.5kg per Fix.**


***IMPORTANT:** Any panel that is not vertical and is inclined such that the panel weight acts to disengage the Button-fix should be treated as a 'ceiling panel' for loading/spacing purposes, and the maximum loading reduced to 2.5kg per Button-fix. A maximum distance of 400mm between Button-fix centres is also recommended for maritime/transport applications.

Safety cords/chains


For critical applications, such as large panels in public areas, ceiling panels and in maritime/transport interiors, always use safety cords or chains. They should be specified to accommodate the load of the particular panel.

It can be helpful to incorporate a carabiner clip or spring hook on the cord/chain assembly to aid service access.

Typical wall panel layout

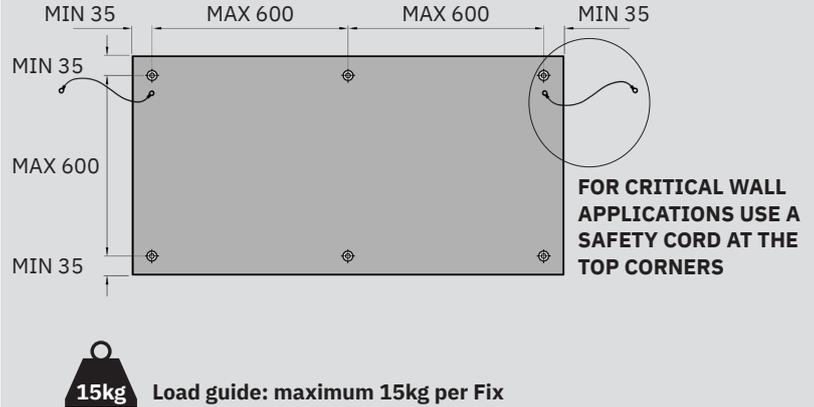

Typical ceiling panel layout

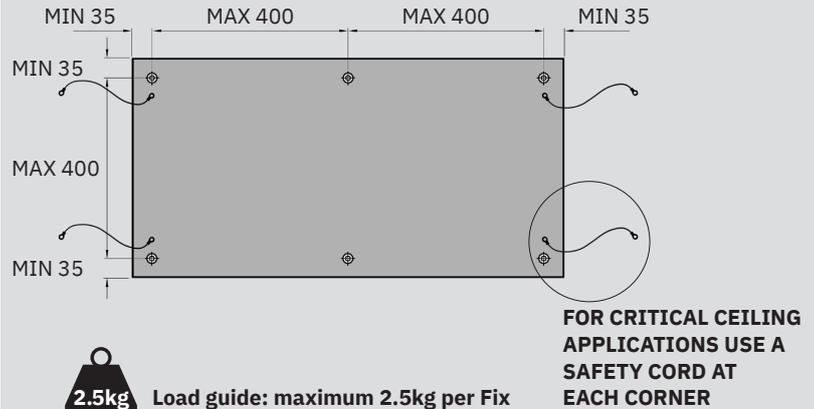


Screw fixings guide

Product/ configuration	Panel thickness/ material	Screw type	net thread length	Notes	
Type 3 Button DO NOT OVER-TIGHTEN SCREW 	8 to 10mm thick Plastic, HPL Plywood, MDF, MFC	#8.16 × 0.375" flange head Plas-60	6.3mm	Sales@intafast.com Pilot drill Ø3mm in soft materials; Ø3.8mm in HPL and hard plastics)	
		#8 (4.2mm) × 0.375" (9.5mm) flange head PZ self-tapping	6.3mm	Accu.co.uk (product code: SPBFT-No.8-3/8-A2) A2 stainless steel	
	10 to 17mm thick Plywood, MDF, MFC	#8 × 0.5" (12.7mm) flange head Easydrive PZ self-tapping	8.8mm	Screwfix.com (product code: 8979H) Add M5 × Ø10 × 1mm thick washer under screw head for 10mm material	
		18mm or greater Plywood, MDF, MFC	#8 × 0.75" flange head Easydrive PZ	15.0mm	Screwfix.com (product code: 6553H)
			#8 × 0.75" pan head STST PZ	15.0mm	Screwfix.com (product code: 1755H)
Ø4.5/5.0 × 20mm pan head	16.0mm	Spax or similar			
Type 3 Flush Fix REBATED 	18mm thick Plywood, MDF, MFC	#8 × 0.5" flange head	6.2mm	Screwfix.com (product code: 8979H)	
		#8 × 0.5" pan head STST	6.2mm	Screwfix.com (product code: 7203H)	
		Varianta Euroscrew Ø 7.8 × 13.5 mm	7.3mm	Häfele (product code: 013.15.724) Pilot drill Ø 5 mm	
	19mm thick Plywood, MDF, MFC	Ø4.0/4.5/5.0 × 16mm CSK	9.8mm	Spax or similar	
		25mm or greater Plywood, MDF, MFC	Ø4.5/5.0 × 20mm CSK	12.5mm	Spax or similar
#8 × 0.75" flange head Easydrive PZ	12.8mm		Screwfix.com (product code: 6553H)		

Suggestions are based on screws available in the UK which have been tested for compatibility with Type 3 Button-fix. Screws from other suppliers may also be suitable but have not been validated by Buttonfix Limited – **always perform your own tests for critical applications.**

Ensure the screws do not break through or show on the panel face.

Specifications

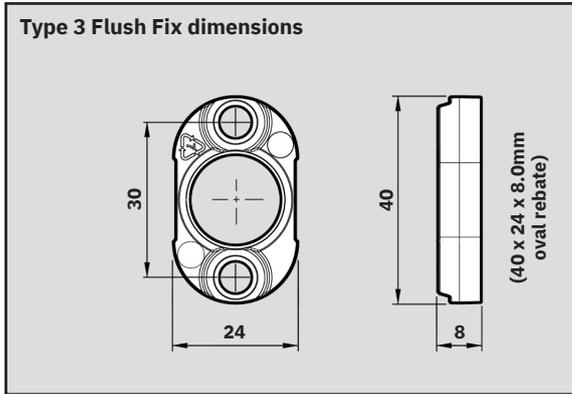

Material: PBT (Fix) & Acetal (Button)

Guide loads: Wall panel with 4 x Fixes = 60 kg max.


Ceiling panel with 4 x Fixes = 10 kg max.

—Advice on panel loads is given with the proviso that the screws and substrate are properly matched, and all other instructions complied with. For critical applications it is essential to perform your own tests.

—Advice is based on independent test reports, which can be found on our website:

button-fix.com/technical-resources

Origin: Manufactured in the UK

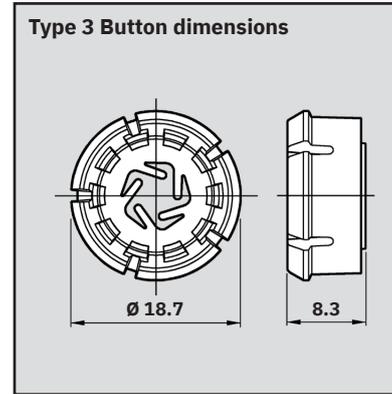

Buttonfix Limited

Unit A, 1 Britton Street
London, EC1M 5NW

T: +44 (0)20 8150 7190

E: info@button-fix.com

EU Authorised Representative:

AR Experts BV
Boeingavenue 209
1119PD Schiphol-Rijk
The Netherlands

button-fix.com