


ICHIJO Product Care & Maintenance Guide

A. Cabinet Doors

• Introduction to adjustment directions

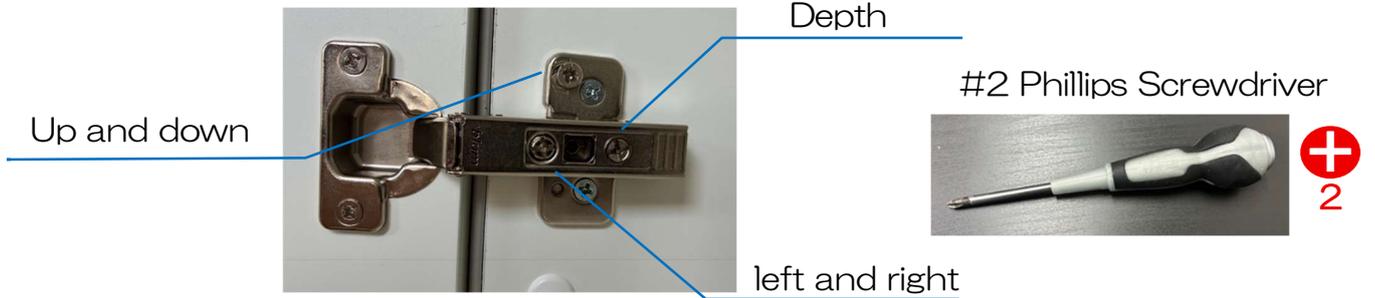

• Adjust the depth



1. Remove the soft-close damper




2. Use a screwdriver to adjust the screw shown below





3. Turn right to move the door inward



4. Turn left to move the door outward

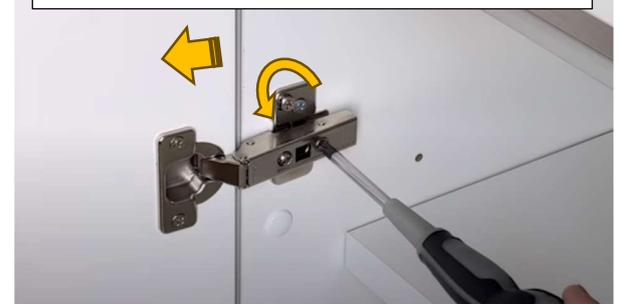

• Adjust the left and right tilt

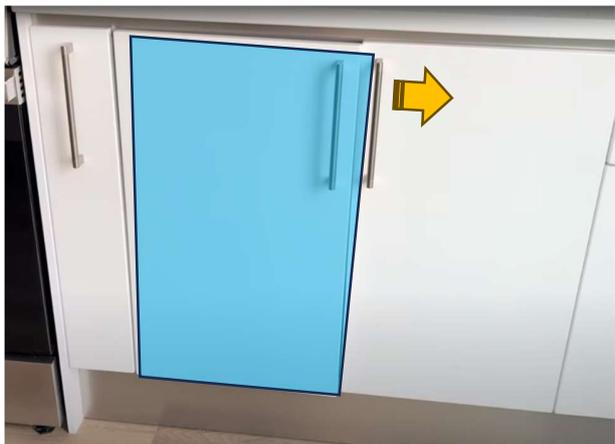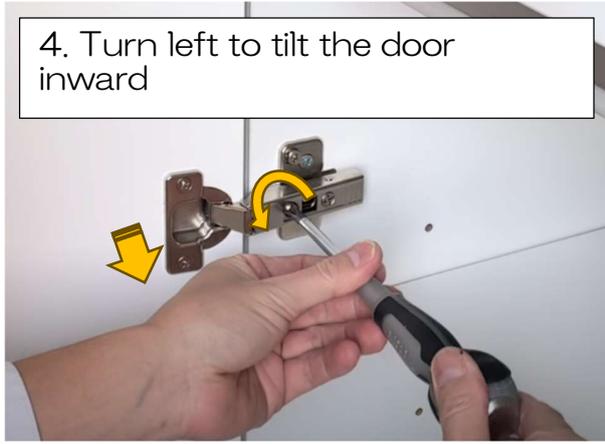


• Adjust the height



1. Remove the soft-close damper and the doors

2. Use a screwdriver to adjust the screw shown below

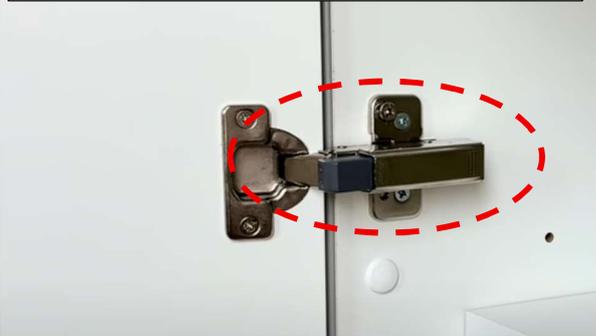

3. Turn right to move the door upwards

4. Turn left to move the door downwards



• Remove the doors

You can remove them by pressing the knobs at the back of each hinge.



• Reinstall the doors

Hook the hinge onto the support hardware. And pushing in the hinge.



• Reinstall the soft-close damper

1. Align the damper's claws with the square holes.



2. Press in with the palm



• Unlock the earthquake-resistant latch

1. If the door won't open




2. Press to open



B. Cabinet Drawers

- Introduction to adjustment directions

Up and down

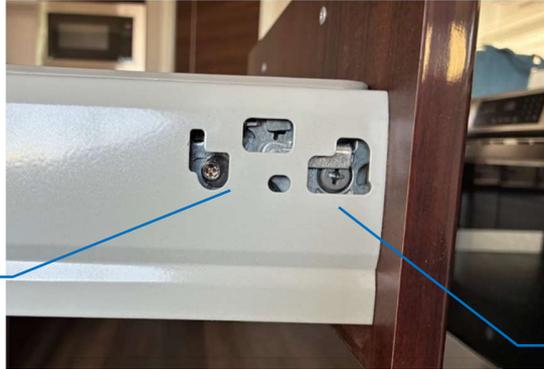

#2 Phillips Screwdriver



+
2

left and right

- Adjust the height

1. Remove the cap



2. Turn the screw left to move it down, turn it right to move it up




- Horizontal adjustment

1. Remove the cap



2. Turn the screw left to move it left, turn it right to move it right

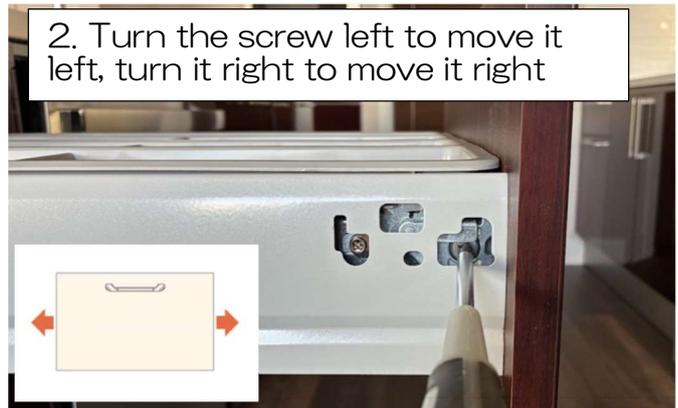

• Remove the drawer

Hold the front of the drawer and lift it upwards. If you lift it while shaking it a few times, it will come off more easily.



• Reinstall the drawer

Place it on the tracks and slowly push it into place.



• Remove the spice rack drawer

Plastic Track Parts Push and Pull Drawer



• Reinstall the spice rack drawer

Insert into the track and push gently



C. Interior Doors

• Adjustment the door

3.0 Hex Screwdriver



1. Remove the cap



2. Turn left to move it down, turn right to move it up



3. Turn right moves it closer to the hinge, turn left moves it away from the hinge



4. Turn right moves it inwards, turn left moves it outwards



5. Adjust the top hinge



6. Put on the cap



• Remove the door

1. Insert a flathead screwdriver and lower the bracket



2. Make sure it's lowered



3. Pull it inwards to remove it



• Reinstall the door

1. Place the door on the bottom hinges



2. Insert into the top hardware



D. Folding closet doors

• Remove the door

1. Grab the lever and remove it from the bracket



2. Pull out the wheel



3. Remove the top in the same way



4. It is heavy and prone to tipping, so we recommend two people working on it



• Reinstall the door

1. While holding the lever, insert it into the bracket



2. Insert the bottom part in the same way

