




TYPE 22H1H4H

Single version with or without spacers

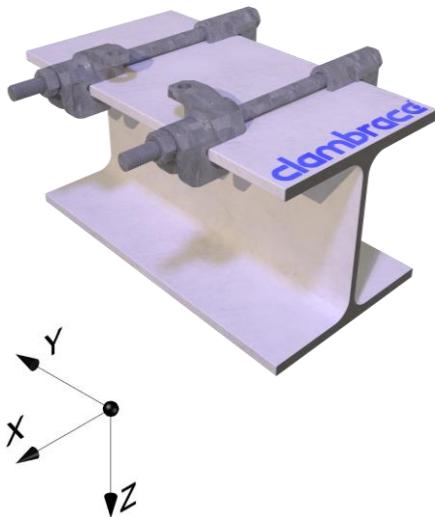

PROFILE DIMENSIONS (MM)				LOAD (KN)				
APPLICABLE TO PROFILES	THICKNESS	WIDTH	PROFILE THICKNESS 6-20MM	PROFILE THICKNESS 6-20MM	PROFILE THICKNESS 6-13MM	PROFILE THICKNESS 13-20MM	WEIGHT KG	THREAD
				Fx	Fy	Fz	Fz	
HE/A 100-400mm								
HE/B 100-300mm	6-20mm	Min. 50mm	-	+/- 4	-6	-5	0,8	M12
IPE 80-600mm								
For Supports	With a foot thickness $s \leq 17\text{mm}$ - no U-Profile (Without spacers)							
Description	2x22H4H + 1x22H1LH + 1x22H1RH + 2 threaded rods M12 + 4 nuts M12 - HD galva - Length of the threaded rods depends on the width of the profile (specified by customer)							
Option	Spacers: $\varnothing 20\text{mm}$ 4,6,8 or 11mm thick, Sliding plate. Code: 22HD4, 22HD6, 22HD8, 22HD11							
Tightening moment	22 Nm for M12 threaded rods 4.6							

Weight is for the clamps only

Specifications

22H1H4H

clambrace®

Applicable On profiles	HEA 100-400 HEB 100-300 IPE 80-600		
Dimensions profiles	<p>Thickness</p> <p>Width</p>	<p>6-20</p> <p>min 50</p>	
Load (kN)	<p>Profile thickness 6-20</p> <p>Profile thickness 6-20</p> <p>Profile thickness 6-13</p> <p>Profile thickness 13-20</p>	<p>Fx</p> <p>Fy</p> <p>Fz</p> <p>Fz</p>	<p>-</p> <p>+/- 4</p> <p>-6</p> <p>-5</p>
	Weight* kg	0,8 kg	
	Thread	M12	
For supports	with a baseplate thickness s <= 17mm - no U profile (without spacers)		
Discription	2x22H4H + 1x22H1LH + 1x22H1RH + 2 threaded rods M12 + 4 nuts M12 - HD galva Length of the threaded rods depends on the width of the profile (to be specified by customer)		
Option	Spacers: Ø20mm 4,6,8 or 11mm thick code: 22HD4, 22HD6, 22HD8, 22HD11		
Torque	22Nm for M12 threaded rods 4.6		
*Note	Weight is only for the clamps		