



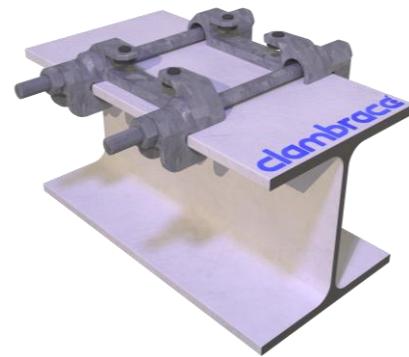

TYPE 22H300

Double version for pipe shoe 80mm wide - with sliding surface

With or without spacers

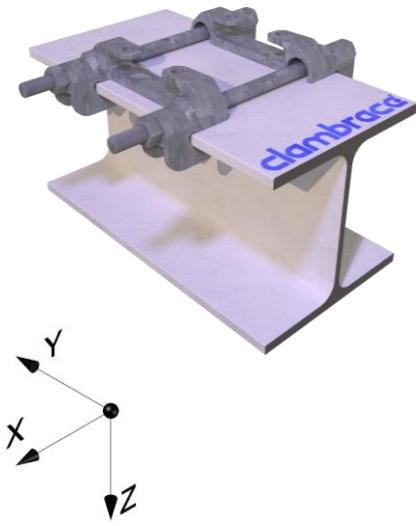

PROFILE DIMENSIONS (MM)				LOAD (KN)				
APPLICABLE TO PROFILES	THICKNESS	WIDTH	PROFILE THICKNESS 6-20MM	PROFILE THICKNESS 6-20MM	PROFILE THICKNESS 6-13MM	PROFILE THICKNESS 13-20MM	WEIGHT KG	THREAD
				Fx	Fy	Fz	Fz	
HE/A 100-400mm								
HE/B 100-300mm	6-20mm	Min. 50mm	-	+/-11	-12	-10	1,4	M12
IPE 100-600mm								
For Supports	Basic support T=80 (without spacers)							
Description	2x22H300 + 2 threaded rods M12 + 4 nuts M12 - HD galva - Length of the threaded rods depends on the width of the profile (specified by customer)							
Tightening torque	22 Nm for M16 threaded rods 4.6							
Weight is for the clamps only								

Specifications

22H300

clambrace

Applicable On profiles	HEA 100-400 HEB 100-300 IPE 100-600
Dimensions profiles	Thickness Width
	6-20 min 50
Load (kN)	Profile thickness 6-20 Profile thickness 6-20 Profile thickness 6-13 Profile thickness 13-20
	Fx Fy Fz Fz
	- +/- 11 -12 -10
	Weight* kg
	1,4kg
	Thread
	M12

For supports	baseplate T-80
Discription	2x22H300 + 2 threaded rods M12 + 2 nuts M12 - HD galva Length of the threaded rods depends on the width of the profile (to be specified by customer)
Option	Spacers: Ø20mm 4,6,8 or 11mm thick code: 22HD4, 22HD6, 22HD8, 22HD11
Torque	22Nm for M12 threaded rods 4.6
*Note	Weight is only for the clamps

