



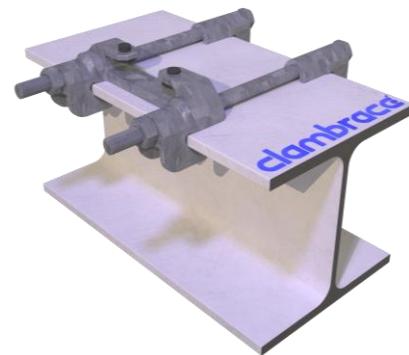

# TYPE 22H300-H4H

Single version for pipe shoe 80mm wide - with sliding surface

With or without spacers

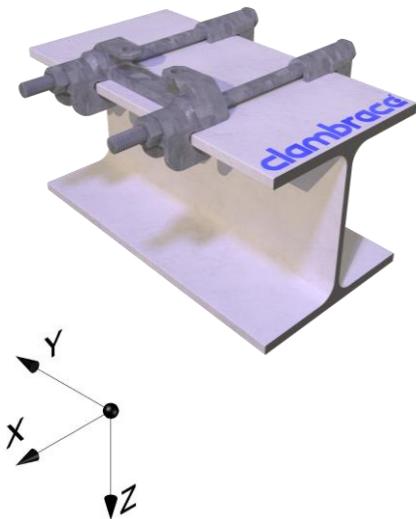

PROFILE DIMENSIONS (MM)				LOAD (KN)				
APPLICABLE TO PROFILES	THICKNESS	WIDTH	PROFILE THICKNESS 6-20MM	PROFILE THICKNESS 6-20MM	PROFILE THICKNESS 6-13MM	PROFILE THICKNESS 13-20MM	WEIGHT KG	THREAD
HE/A 100-400mm				Fx	Fy	Fz	Fz	
HE/B 100-300mm	6-20mm	Min. 50mm	-	+/- 9	-6	-5	1,2	M12
IPE 100-600mm								
For Supports	Basic support T=80 (without spacers)							
Description	1x22H300 + 2x22H4H + 2 threaded rods M12 + 4 nuts M12 - HD galva - Length of the threaded rods depends on the width of the profile (specified by customer)							
Tightening torque	22 Nm for M16 threaded rods 4.6							
Weight is for the clamps only								

# Specifications

## 22H300-H4H

clambrace

Applicable On profiles	HEA 100-400 HEB 100-300 IPE 100-600
Dimensions profiles	Thickness Width
	6-20 min 50
Load (kN)	Profile thickness 6-20 Profile thickness 6-20 Profile thickness 6-13 Profile thickness 13-20
	Fx Fy Fz Fz
	- +/- 9 -6 -5
	Weight* kg
	1,2kg
	Thread
	M12

For supports	baseplate T-80
Discription	1x22H300 + 2x22H4H + 2 threaded rods M12 + 2 nuts M12 - HD galva Length of the threaded rods depends on the width of the profile (to be specified by customer)
Option	Spacers: Ø20mm 4,6,8 or 11mm thick code: 22HD4, 22HD6, 22HD8, 22HD11
Torque	22Nm for M12 threaded rods 4.6
*Note	Weight is only for the clamps

