



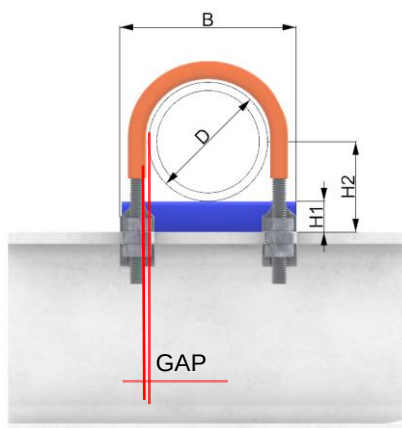

TYPE 22H5B C-BAR TM (HR)

Version with semi-circular C-Bar sliding surface

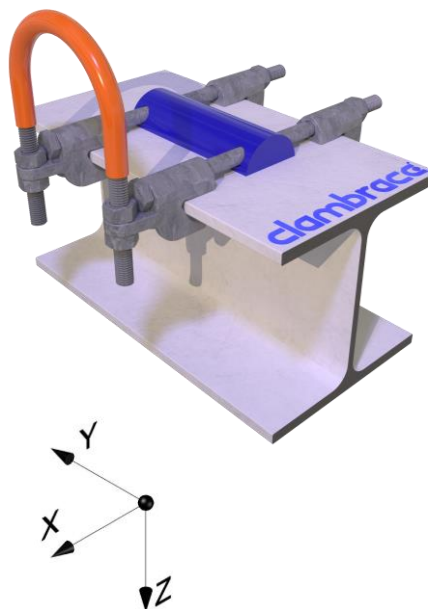

DIMENSIONS						LOAD (KN)			
ND	INCH	OUTER Ø MM	HEIGHT H2 MM	WIDTH B MM	THREAD	GAP MM	FY	FZ	WEIGHT KG
20	3/4"	26,9	33	65	M12	1	0,6	2,5	0,6
25	1"	33,7	37	72	M12	2	0,5	2,5	0,6
32	1 1/4"	42,4	41	80	M12	2	0,5	2,5	0,7
40	1 1/2"	48,3	44	86	M12	2	0,4	2,5	0,7
50	2"	60,3	50	100	M12	3	0,5	2,5	0,7
65	2 1/2"	76,1	58	118	M12	5	0,3	2,5	0,7
80	3"	88,9	64	130	M12	5	0,3	2,5	0,7
100	4"	114,3	77	160	M12	9	0,3	2,5	0,7
125	5"	139,7	90	188	M12	12	0,2	2,5	0,7
150	6"	168,3	104	216	M12	12	0,2	2,5	0,8
200	8"	219,1	130	272	M12	16	0,2	2,5	0,8
250	10"	273	157	326	M12	16	0,2	2,5	0,9
300	12"	323,9	180	376	M12	16	0,2	2,5	1

Apply to profiles 6-20mm dikte profiel / Breedte : 100mm minimum

Description 2x22H5-O + 2x22H5H + 2 bolts M12 + 2 nuts M12 - HD galva + 1 semi-circular slideprofile 20mm height - Length of the threaded rods depends on the width of the profile (specified by customer)

Tightening moment 22 Nm for M12 threaded rods 4.6

Also compatible with C-Bolt

Specifications

22H5B C-Bar



Dimensions	ND	20	25	32	40	50	65	80	100	125	150	200	250	300
	INCH	3/4"	1"	1 1/4"	1 1/2"	2"	2 1/2"	3"	4"	5"	6"	8"	10"	12"
Outside Ø mm		26,9	33,7	42,4	48,3	60,3	76,1	88,9	114,3	139,7	168,3	219,1	273	323,9
Height H2 mm		33	37	41	44	50	58	64	77	90	104	130	157	182
Width B mm		65	70	80	86	100	118	130	160	188	216	272	326	376
Thread		M12	M12	M12	M12	M12	M12	M12	M12	M12	M12	M12	M12	M12
Load (KN)	Fx	-	-	-	-	-	-	-	-	-	-	-	-	-
	Fy	0,6	0,5	0,5	0,4	0,4	0,3	0,3	0,3	0,2	0,2	0,2	0,2	0,2
	Fz	2,5	2,5	2,5	2,5	2,5	2,5	2,5	2,5	2,5	2,5	2,5	2,5	2,5
weight kg		0,6	0,6	0,7	0,7	0,7	0,7	0,7	0,7	0,7	0,8	0,8	0,9	1

Applicable on profiles	6-20mm thickness beam / Width: 100mm minimum
Discription	2x22H5-O + 2x22H5H + 2 tie -rods M12 + 2 nuts M12 - HD galva + 1 C-BAR TM Length of bolts depends on width beam (to be specified by customer)
Torque	22Nm for M12 bolts 4.6

