



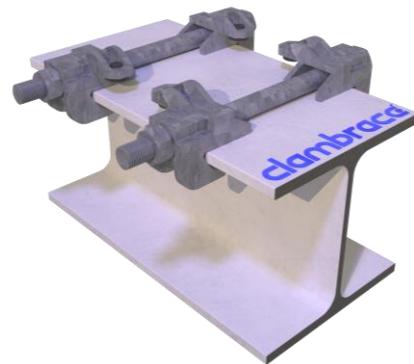

TYPE 22H28

Double version, with or without spacers

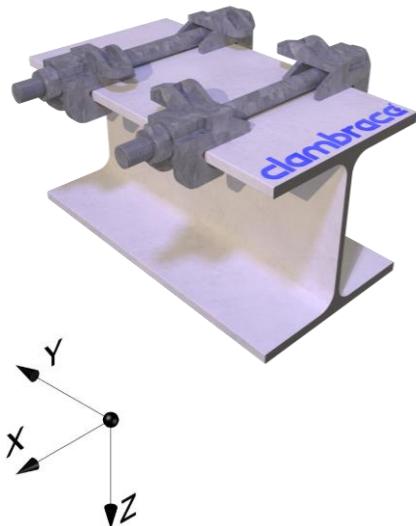

PROFILE DIMENSIONS (MM)				LOAD (KN)				
APPLICABLE TO PROFILES	THICKNESS	WIDTH	PROFILE THICKNESS 6-20MM	PROFILE THICKNESS 6-20MM	PROFILE THICKNESS 6-13MM	PROFILE THICKNESS 13-20MM	WEIGHT KG	THREAD
				Fx	Fy	Fz	Fz	
HE/A 120-400mm								
HE/B 120-300mm	6-20mm	Min. 120mm	-	+/- 10	-26	-20	2	M16
IPE 240-600mm								
For Supports	With a foot thickness $s \leq 15\text{mm}$ (Without spacers)							
Description	2x22H28L + 2x22H28R + 2 threaded rods M16 + 4 nuts M16 - HD galva - Length of the threaded rods depends on the width of the profile (specified by customer)							
Tightening torque	55 Nm for M16 threaded rods 4.6							
Weight is for the clamps only								

Specifications 22H28

clambrace®

Applicable On profiles		HEA 120-400 HEB 120-300 IPE 240-600
Dimensions profiles	Thickness	6-20
	Width	min 120
Load (kN)	Profile thickness 6-20	Fx
	Profile thickness 6-20	Fy
	Profile thickness 6-13	Fz
	Profile thickness 13-20	Fz
Weight* kg		2 kg
Thread		M16
For supports	with a baseplate thickness $s \leq 15\text{mm}$ - no U profile (without spacers)	
Discription	2x22H28L + 2x22H28R + 2 threaded rods M16 + 4 nuts M16 - HD galva Length of the threaded rods depends on the width of the profile (to be specified by customer)	
Option	Spacers: Ø20mm 4,6,8 or 11mm thick code: 22HD4, 22HD6, 22HD8, 22HD11	
Torque	55Nm for M16 threaded rods 4.6	
*Note	Weight is only for the clamps	