




TYPE 22H101

Double version with sliding surface

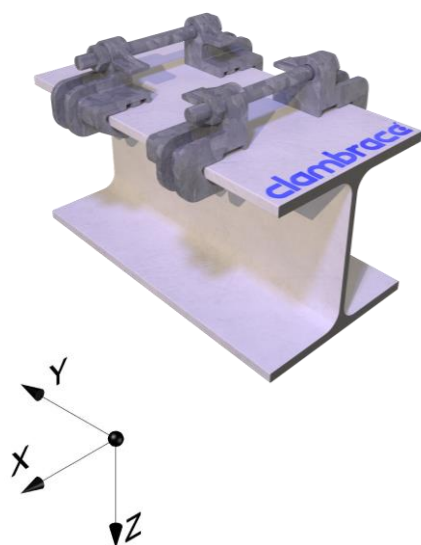

PROFILE DIMENSIONS (MM)				LOAD (KN)				
APPLICABLE TO PROFILES	THICKNESS	WIDTH	PROFILE THICKNESS 6-20MM	PROFILE THICKNESS 6-20MM	PROFILE THICKNESS 6-13MM	PROFILE THICKNESS 13-20MM	WEIGHT KG	THREAD
			Fx	Fy	Fz	Fz		
HE/A 100-400mm								
HE/B 100-300mm	6-20mm	Min. 100mm	-	+/- 8	-19/+60	-9/+60	1,8	M12
IPE 200-600mm								
For Supports		With a foot thickness $s \leq 15\text{mm}$						
Description		2x22H101L + 2x22H101R + 2 threaded rods M12 + 4 nuts M12 - HD galva - Length of the threaded rods depends on the width of the profile (specified by customer)						
Tightening torque		22 Nm for M16 threaded rods 4.6						

Weight is for the clamps only

Specifications

22H101

Applicable On profiles			HEA 100-400 HEB 100-300 IPE 200-600
Dimensions profiles	Thickness		6-20
	Width		min 100
Load (kN)	Profile thickness 6-20	Fx	-
	Profile thickness 6-20	Fy	+/- 8
	Profile thickness 6-13	Fz	-19/+60
	Profile thickness 13-20	Fz	-9/+60
Weight* kg			1,8kg
Thread			M12

For supports	with a baseplate thickness $s \leq 15\text{mm}$
Discription	2x22H101L + 2x22H101R + 2 bolts M12 + 2 nuts M12 - HD galva Length of the threaded rods depends on the width of the profile (to be specified by customer)
Torque	22Nm for M12 threaded rods 4.6
*Note	Weight is only for the clamps

