




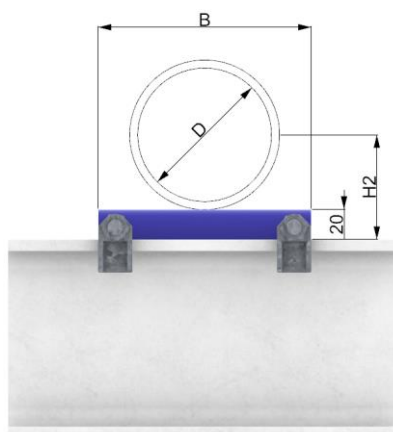

TYPE 22H5 C-BAR TM (HR)

Free support with C-Bar Sliding surface

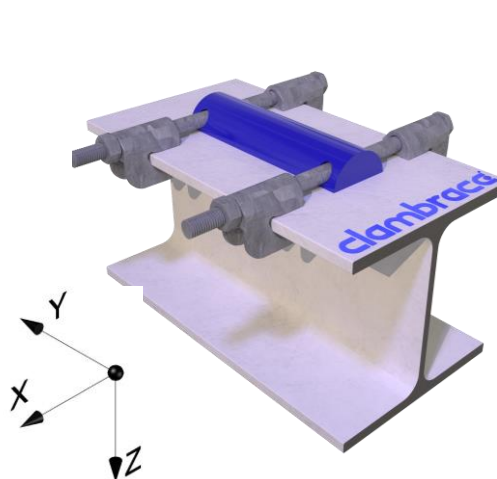

DIMENSIONS						LOAD (KN)			
ND	INCH	OUTER Ø MM	H2	B	THREAD	FX	FY	FZ	WEIGHT KG
15	½	21,3	31	65	M12	-	-	2,5	0,5
20	¾	26,9	33	65	M12	-	-	2,5	0,6
25	1	33,7	37	72	M12	-	-	2,5	0,6
32	1 ¼	42,4	41	80	M12	-	-	2,5	0,7
40	1 ½	48,3	44	86	M12	-	-	2,5	0,7
50	2	60,3	50	100	M12	-	-	2,5	0,7
65	2 ½	76,1	58	118	M12	-	-	2,5	0,7
80	3	88,9	64	130	M12	-	-	2,5	0,7
100	4	114,3	77	160	M12	-	-	2,5	0,7
125	5	139,7	90	188	M12	-	-	2,5	0,7
150	6	168,3	104	216	M12	-	-	2,5	0,8
200	8	219,1	130	272	M12	-	-	2,5	0,8
250	10	273,0	157	326	M12	-	-	2,5	0,9
300	12	323,9	182	376	M12	-	-	2,5	1,0
Apply to profiles			6-20mm dikte profiel / Breedte : 100mm minimum						
Description			4x22H5-O + 2 bolts M12 + 2 nuts M12 - HD galva + 1 semi-circular slideprofile 20mm height - Length of the threaded rods depends on the width of the profile (specified by customer)						
Tightening moment			22 Nm for M12 threaded rods 4.6						

Specifications

22H5 C-Bar

Dimensions	ND	15	20	25	32	40	50	65	80	100	125	150	200	250	300
	INCH	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"	2 1/2"	3"	4"	5"	6"	8"	10"	12"
Outside Ø mm		21,3	26,9	33,7	42,4	48,3	60,3	76,1	88,9	114,3	139,7	168,3	219,1	273	323,9
Height H2 mm		31	33	37	41	44	50	58	64	77	90	104	130	157	182
Width B mm		65	65	70	80	85	100	118	130	160	188	216	272	326	376
Thread		M12	M12	M12	M12	M12	M12	M12	M12	M12	M12	M12	M12	M12	M12
Load (KN)	Fx	-	-	-	-	-	-	-	-	-	-	-	-	-	-
	Fy	-	-	-	-	-	-	-	-	-	-	-	-	-	-
	Fz	2,5	2,5	2,5	2,5	2,5	2,5	2,5	2,5	2,5	2,5	2,5	2,5	2,5	2,5
weight kg		0,6	0,6	0,7	0,7	0,7	0,7	0,7	0,7	0,7	0,7	0,8	0,8	0,9	1

Applicable on profiles	6-20mm thickness beam / Width: 100mm minimum
Discription	4x22H5-O + 2 tie -rods M12 + 4 nuts M12 - HD galva + 1 C-BAR TM Length of bolts depends on width beam (to be specified by customer)
Torque	22Nm for M12 bolts 4.6

