



ULTRAMAR WATER

FLEXIBILITY MEETS SUSTAINABILITY

8" Spiral Wound Elements for Brackish Water

Description:


Low Pressure, High Productivity:
Low or ultra low pressure application for brackish water treatment

Specifications:

Model	Permeate Flow GPD(m ³ /day)	Active Membrane Area ft ² (m ²)	Stabilized Salt Rejection	Minimum Salt Rejection	Feed spacer mil(mm)	Test Conditions
ULP-8040-400-HR (34)	10800(41)	400(37)	99.4%	99.2%	34(0.85)	150psi/2000ppm NaCl

1. All performance data are collected at 25°C (77°F), pH7.5 and 15% recovery rate.
2. Permeate flows for single element may vary ±15%.

Element Dimension:

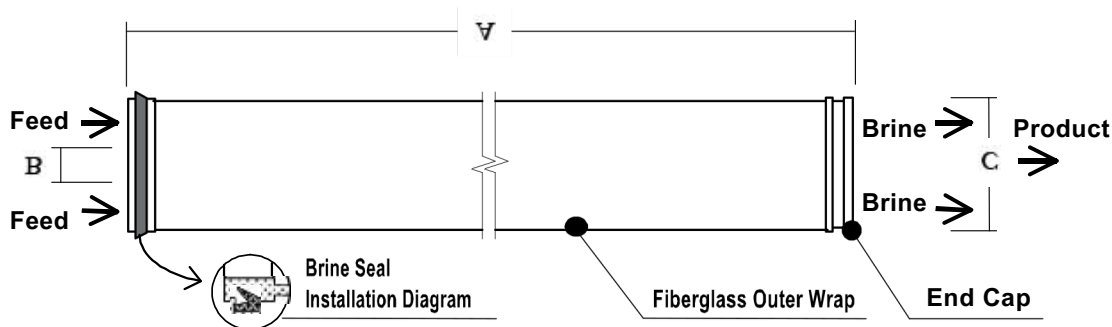

Product	Dimensions – Inches (mm)		
	A	B	C
ULP-8040-400-HR 34)	40.0 (1016)	1.125 (29)	7.9 (201)

* 1 inch= 25.4 mm

Operating Limits for Design:

Maximum Operating Temperature..... 45°C(113°F)
Maximum Operating Pressure..... 600psi(41bar)
Maximum Pressure Drop (single element)..... 15psi(1.0bar)
pH Range for Continuous Operation..... 2-11 pH
Range for Cleaning..... 2-12
Chlorine tolerance..... <0.1ppm
Maximum Feed SDI..... 5