

TEC CABLEHEAD

DESCRIPTION


The Cablehead provides a primary well control barrier and a means of running logging tools or perforating guns on Coiled Tubing.

The tool features; double flapper check valves, a cable anchor and release mechanism, a flow activated disconnect as well as the means to pass an electrical signal to the tools below.

The disconnect mechanism and lower electrical section can be replaced with a conventional flow& Tension Disconnect, whilst the cable remains anchored, allowing conventional CT work to be carried out with the same string.

FEATURES

- Single piece cartridge type Double Flapper Check Valve safety system
- High tensile and compressive strength rating
- 10,000 psi Safe Working Pressure
- User friendly cable anchor and release mechanism
- Flow and Tension release mechanism
- Ability to carry out conventional work without changing the CT string or Cablehead
- Offset bores to maximise flapper ID's for conventional operations
- Disconnect Sub fitted with GS type internal fish neck profile
- Hexagonal flats for safe make-up & break-out
- Connection options to suit customer requirements
- Corrosion resistant materials

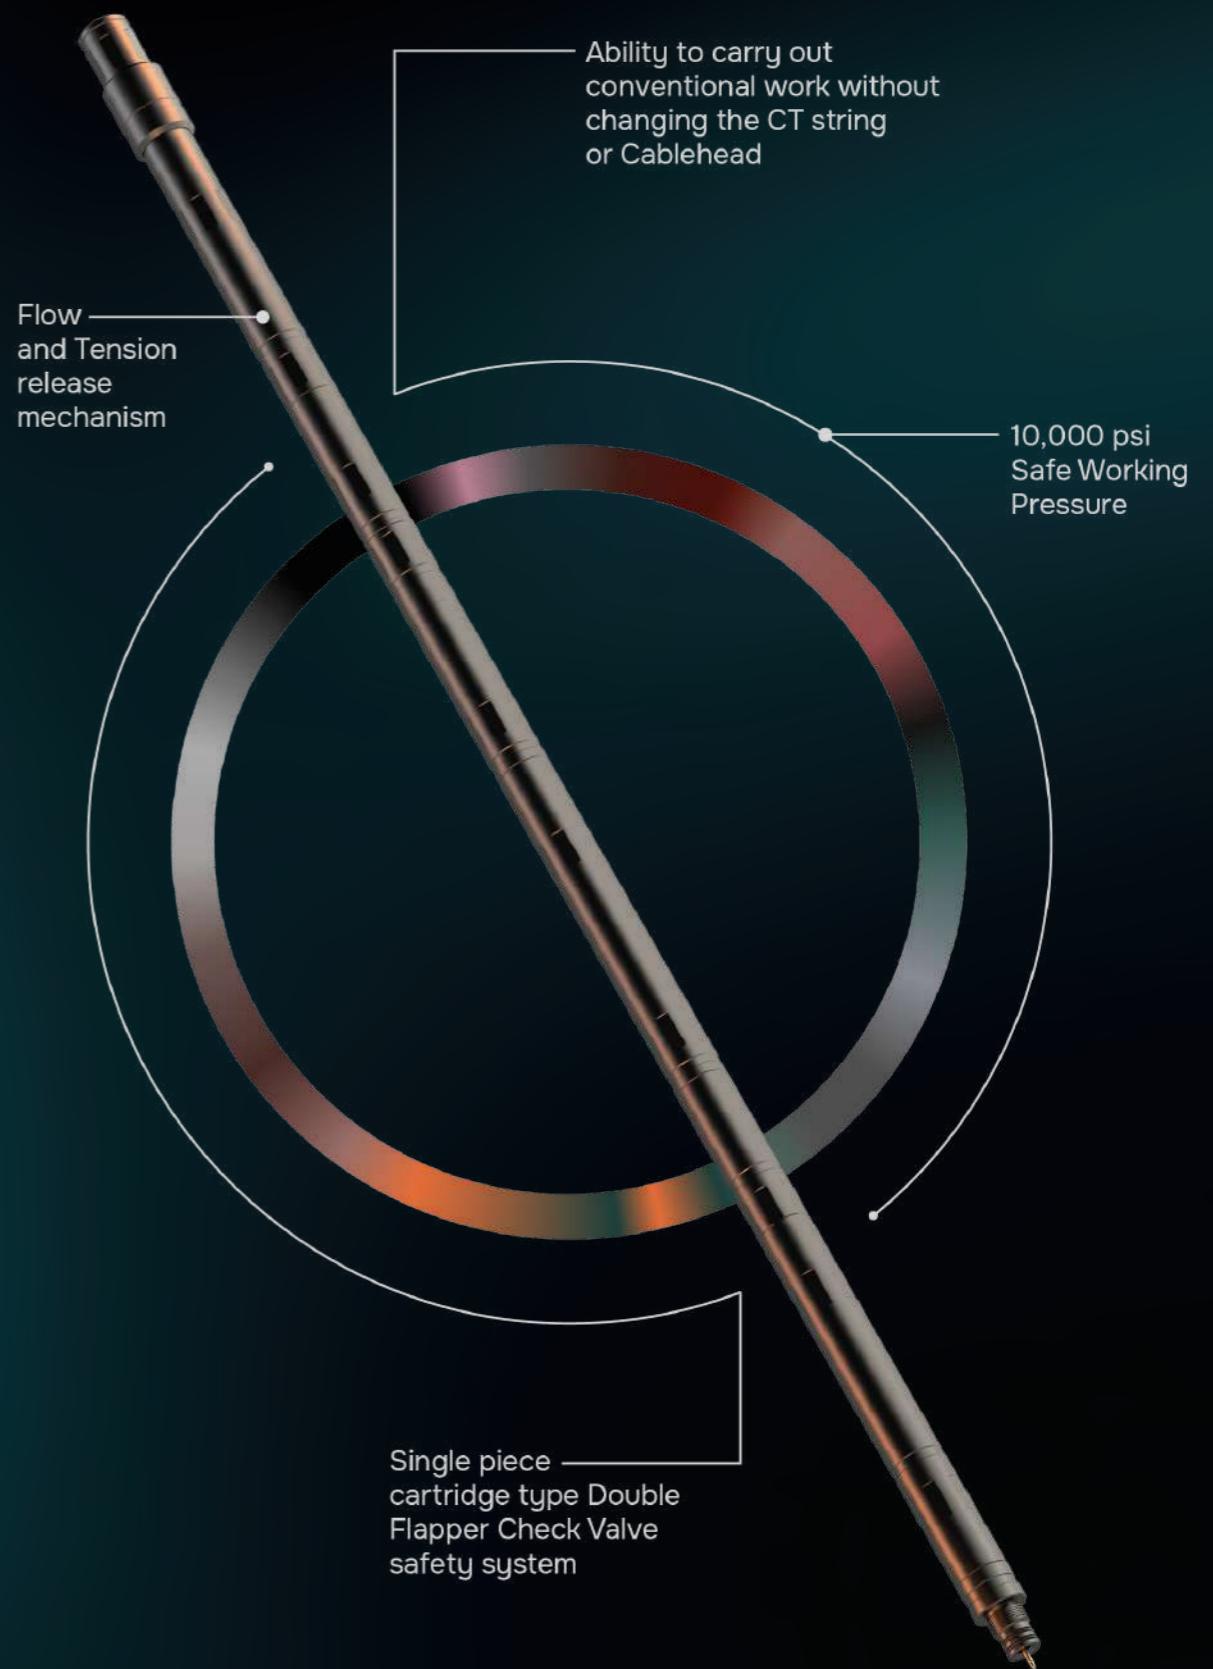

OD in - [mm]	Disconnect GS Profile in - [mm]	Length in - [mm]	Conductors
1,69 - [42,85]	1-1/2" GS	43,47 - [1104,14]	Mono
2,13 - [53,98]	2" GS	47,37 - [1203,20]	Mono
2,88 - [73,03]	3" GS	51,35 - [1304,29]	Multi