



C2 Specifications



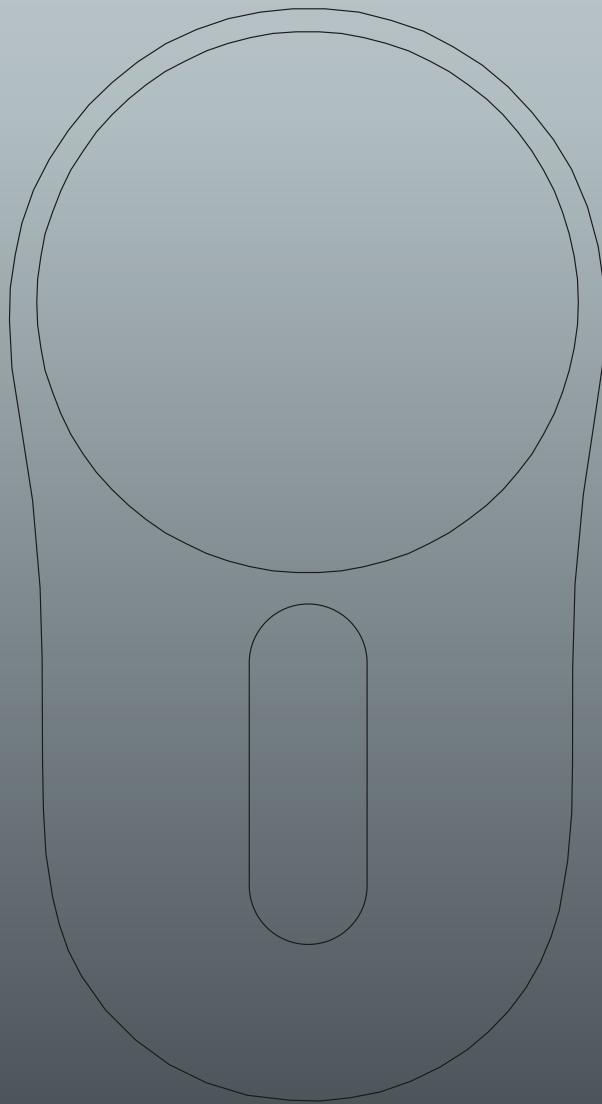

C2 Specifications 2025

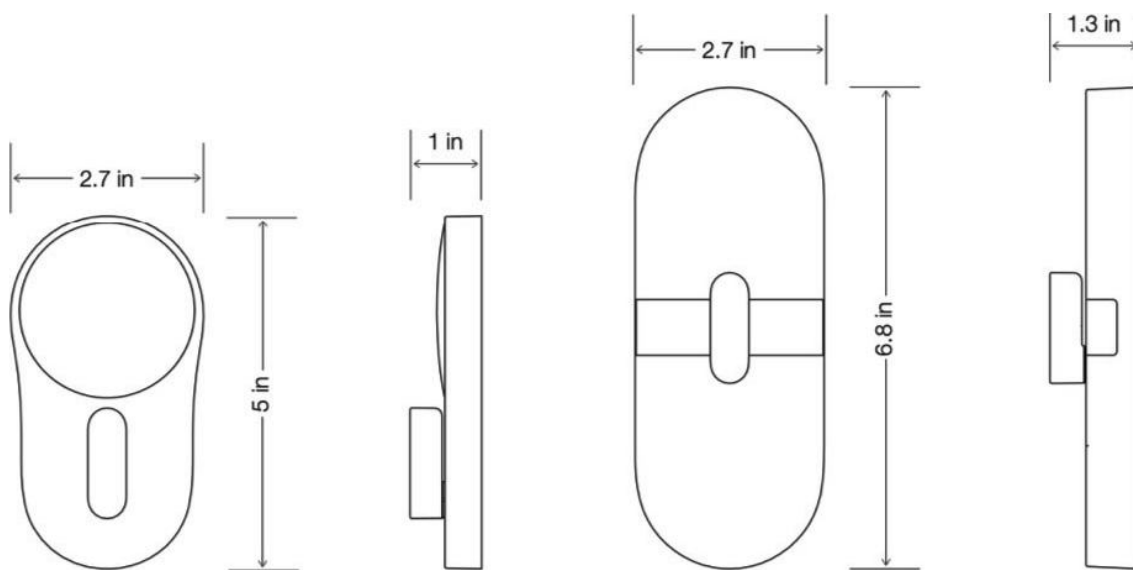

Finishes



Latch Black Exterior
Latch Black Interior

Matte Finish
Zinc Alloy Exterior & Turns
Polycarbonate Lens & Battery Cover



Satin Chrome Exterior
Latch White Interior

Satin Finish
Zinc Alloy Exterior & Turns
Polycarbonate Lens & Battery Cover



Features

Credential Types	Smartphone, NFC Keycard, Doorcode
Users	1500
Management	App and Cloud

Communication

Wireless Standards	Bluetooth Low Energy 5.0 (BLE), Near Field Communication (NFC)
NFC Frequency	13.56 MHz
NFC Type	DESFire Light
Supported Devices	iOS, Watch OS, and Android

Power

Power Supply	6 AA non-rechargeable alkaline batteries
Battery Status	Passive monitoring and active notifications via DOOR OS
Inductive Jumpstart	Qi-compatible power source can wireless power a Bluetooth unlock in the event of battery failure

Environmental

Operating Temperature	-5°F to 122°F (-20°C to 50°C)
Operating Humidity	0–95% relative humidity, non-condensing
Weather Resistance	Lens: IP65, Exterior/Interior Assemblies: IP55 – Interior assembly not intended for outdoor use.

Certifications

Certifications	UL 10B/C (90 min), CAN/ULC S104, FCC Part 15, IC RSS, FL TAS 201/202/203-94, ANSI/BHMA A156.36 Grade 2
Compliance	Complies with Americans with Disabilities Act



Mechanical Specifications

Lock Format	Turn Mechanism Deadbolt
Handing	Field reversible
Door Thickness Compatibility (field configurable)	1-3/4" and 1-3/8"
Backset Compatibility (field configurable)	2-3/4" and 2-3/8"
Door Preparation	5-1/2" Center to Center with a 1" crossbore
Deadbolt Throw	1"
Faceplate Options	1" × 2-1/4" round corner, drive-in
Strike Plate	1-1/8" × 2-3/4" rounded corner security strike