



M2 Specifications



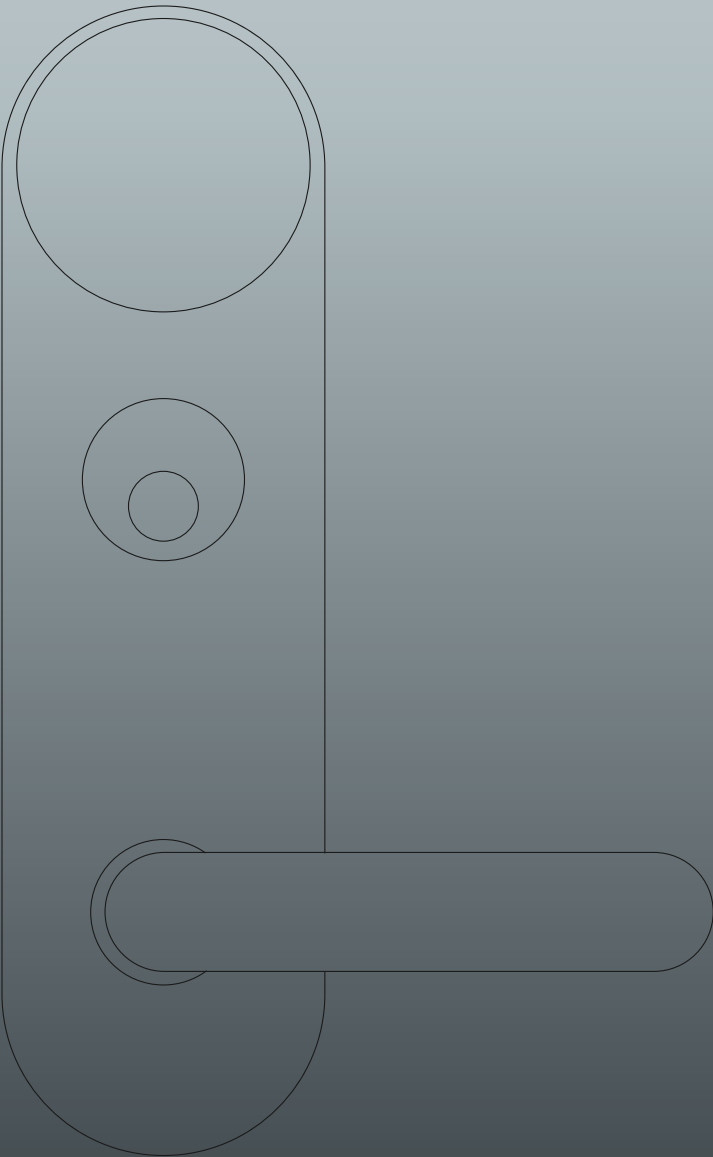

M2 Specifications 2025

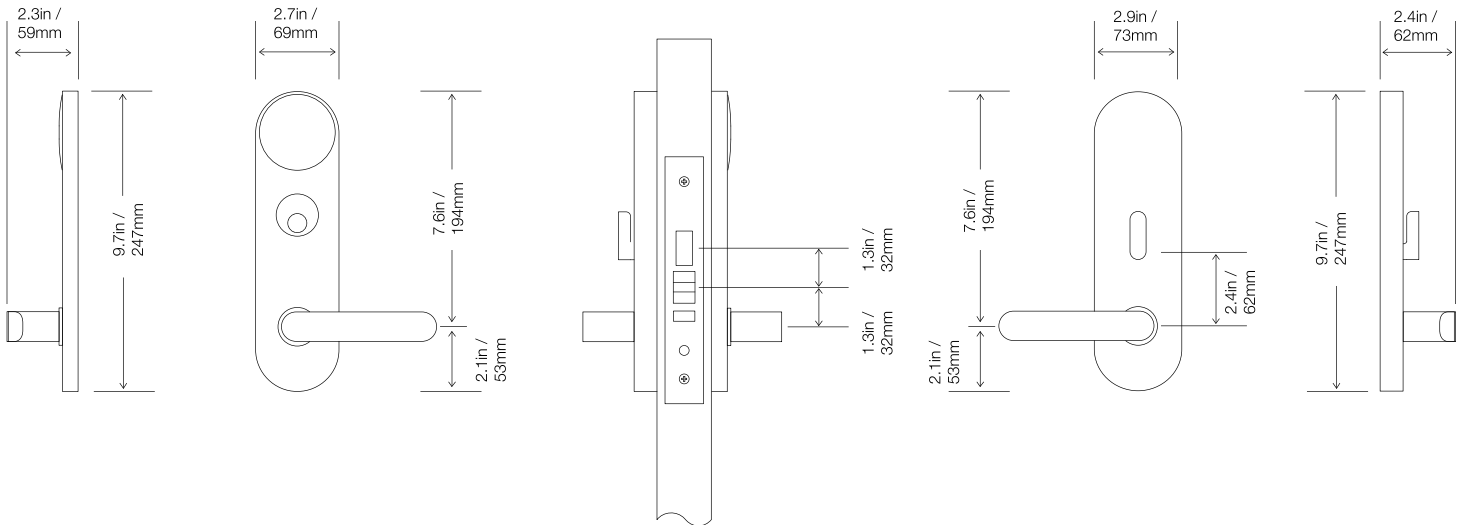

Finishes



**Black Exterior
Black Interior**


Matte Finish
Zinc Alloy Exterior & Turns
Polycarbonate Lens & Battery Cover




**Satin Chrome Exterior
White Interior**

Satin Finish
Zinc Alloy Exterior & Turns
Polycarbonate Lens & Battery Cover

Lever Styles

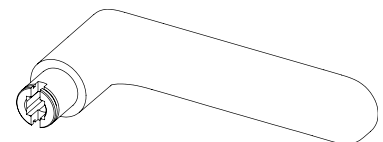

Standard

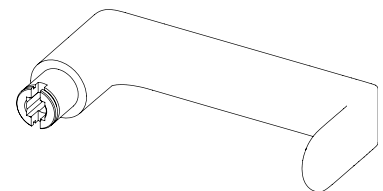

Return



Features

Credential Types	Smartphone, NFC Keycard, Doorcode, Mechanical Key
Users	1500
Management	App and Cloud

Communication

Wireless Standards	Bluetooth Low Energy 5.0 (BLE), Near Field Communication (NFC)
NFC Frequency	13.56 MHz
NFC Type	MIFARE DESFire Light
Supported Devices	iOS, Watch OS, and Android

Power

Power Supply	6 AA non-rechargeable alkaline batteries
Battery Status	Passive monitoring and active notifications via DOOR OS
Inductive Jumpstart	Qi-compatible power source can wireless power a Bluetooth unlock in the event of battery failure

Environmental

Operating Temperature	-4°F to 130°F
Operating Humidity	0–95% relative humidity, non-condensing
Weather Resistance	Lens: IP65, Exterior/Interior Assemblies: IP55 — Interior assembly not intended for outdoor use

Certifications

Certifications	UL 10B/C (90 min), CAN/ULC S104, FCC Part 15, IC RSS, FL TAS 201/202/203-94
Compliance	Complies with Americans with Disabilities Act



Mechanical Specifications

Lock Format	Mortise
Handing	Field reversible
Door Thickness Compatibility (field configurable)	1-3/4" / 44.5mm
Backset Compatibility (field configurable)	2-3/4" / 69.9mm
Door Preparation	Templates available at support.door.com
Deadbolt Throw	1" / 25.4mm
Faceplate Options	8" x 1/4", 0.06" Thick / 203.2 x 6.4 mm, 1.5mm Thick
Strike Plate	ANSI 4-7/8" x 1-1/4" / 123.8 x 31.75 mm Curved Lip Strike