



M3 Specifications



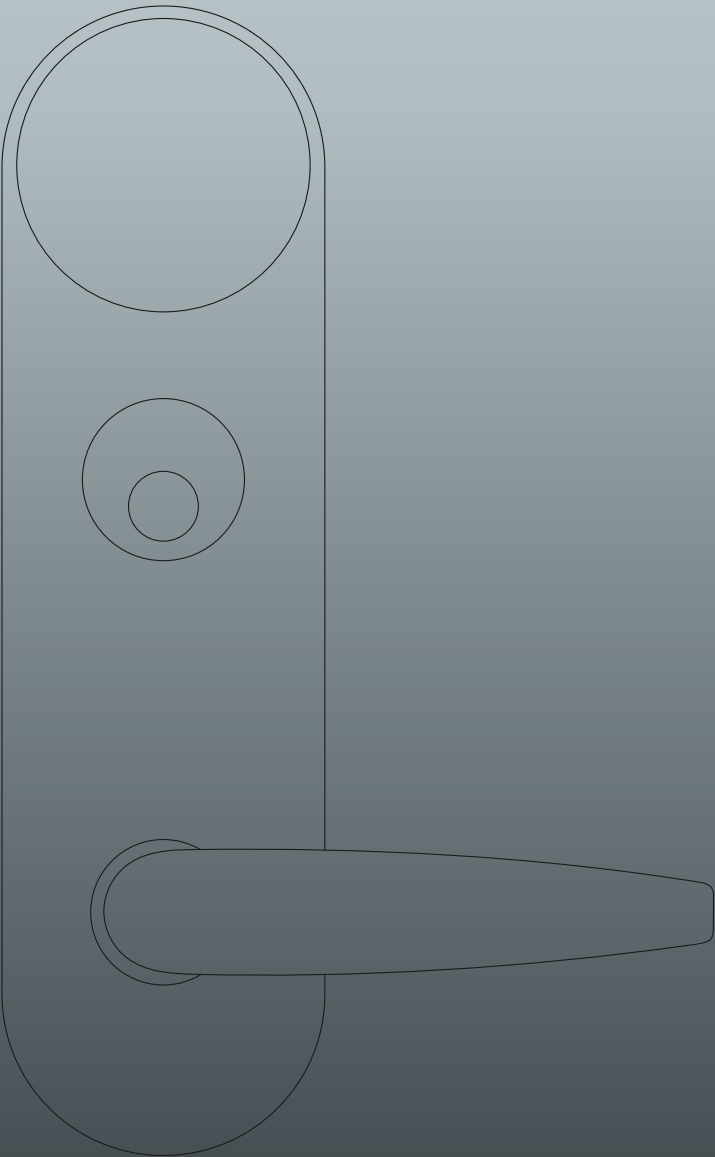

M3 Specifications 2025

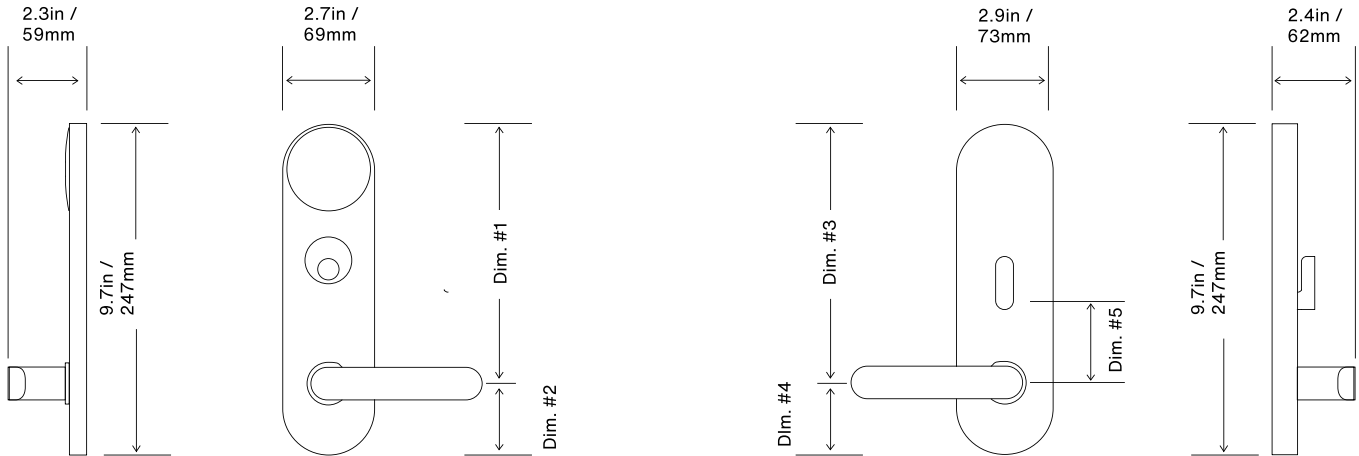


Finishes



Black Exterior
Black Interior


Zinc Alloy Trim
Polycarbonate Lens

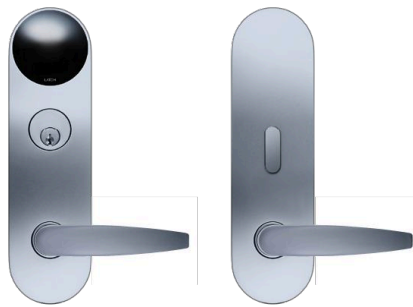

Satin Chrome Exterior,
Satin Chrome Interior

Zinc Alloy Trim
Polycarbonate Lens

Lever Styles

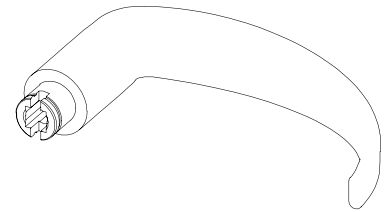



M3 Variant

	Dim. #1 Top of outer trim to lever	Dim. #2 Bottom of outer trim to lever	Dim. #3 Top of inner trim to lever	Dim. #4 Bottom of inner trim to lever	Dim. #5 Thumbturn to lever
Latch/Townsteel/Best	7.6 in / 194 mm	2.1 in / 53 mm	7.6 in / 193 mm	2.1 in / 53 mm	2.4 in / 62 mm
Marks/Dorma	7.7 in / 196 mm	2.0 in / 51 mm	7.7 in / 196 mm	2.0 in / 51 mm	2.4 in / 62 mm
Corbin	7.6 in / 194 mm	2.1 in / 53 mm	7.6 in / 193 mm	2.1 in / 53 mm	2.4 in / 62 mm
Sargent	7.9 in / 200 mm	1.8 in / 46 mm	7.9 in / 200 mm	1.8 in / 46 mm	2.5 in / 63 mm
Schlage	7.9 in / 200 mm	1.9 in / 47 mm	7.9 in / 200 mm	1.9 in / 47 mm	2.7 in / 69 mm

Features

Credential Types	Smartphone, NFC Keycard, Doorcode, Mechanical Key
Users	1500
Management	App and Cloud

Communication

Wireless Standards	Bluetooth Low Energy 5.0 (BLE), Near Field Communication (NFC)
NFC Frequency	13.56 MHz
NFC Type	MIFARE DESFire Light
Supported Devices	iOS, Watch OS, and Android

Power

Power Supply	6 AA non-rechargeable alkaline batteries
Battery Status	Passive monitoring and active notifications via DOOR OS
Inductive Jumpstart	Qi-compatible power source can wireless power a Bluetooth unlock in the event of battery failure

Environmental

Operating Temperature	-4°F - 130°F
Operating Humidity	0–95% relative humidity, non-condensing
Weather Resistance	Lens: IP65, Exterior/Interior Assemblies: IP55 — Interior assembly not intended for outdoor use



Certifications

Certifications	UL 10B/C (90 min), CAN/ULC S104, FCC Part 15, IC RSS, FL TAS 201/202/203-94
Compliance	Complies with Americans with Disabilities Act

Mechanical Specifications

Lock Format	Mortise
Handing	Field reversible
Door Thickness Compatibility (field configurable)	1-3/4" / 44.5mm
Backset Compatibility (field configurable)	2-3/4" / 69.9mm
Mortise Compatibility	Latch, Townsteel, Best, Schlage, Sargent, Corbin, Marks, Dorma
Door Preparation	Templates available at support.door.com
Deadbolt Throw	1" / 25.4mm
Faceplate Options	8" x 1/4", 0.06" Thick / 203.2 x 6.4 mm, 1.5mm Thick
Strike Plate	ANSI 4-7/8" x 1-1/4" / 123.8 x 31.75 mm Curved Lip Strike