



APPLICATION		OUTDOOR		PRODUCT TYPE		ZSGLD-12500V-1250KVA	
PHASES		3 PHASES		PRODUCT CODE		CSA C88-M90 IEEE C57.12.90	
RATED FREQUENCY		60 Hz		COOLING METHOD		ONAN	
RATED CAPACITY		1250 kVA		VECTOR GROUP		Dy11	
RATED VOLTAGE	HIGH VOLTAGE 25000(12500)V			IMPEDANCE VOLTAGE	HIGH-LOW VOLTAGE		%
	LOW VOLTAGE 416/240 V						
RATED CURRENT	HIGH VOLTAGE 28.87(57.73)A			OIL VOLUME		1540	L
	LOW VOLTAGE 1734.83 A			LIFTING WEIGHTS		4830	kg
SERIAL NO.		JSZL2021		TOTAL WEIGHTS		4830	kg
INSULATION LEVEL	h.v. LINE TERMINAL			LI AC		150/50	kV
	l.v. LINE TERMINAL			LI AC		/10	kV
TAP CHANGER (HIGH VOLTAGE)				VECTOR			
NO.	RANGE	TAP VOLTAGE	TAP CONN.				
1	+5%	26250(13125)	2-3				
2	+2.5%	25625(12812)	3-4				
3	RATED	25000(12500)	4-5				
4	-2.5%	24375(12187)	5-6				
5	-5%	23750(11875)	6-7				
MATERIAL							
INSULATING OIL		45# Sinopec					
CONDUCTOR		ALUMINUM					
TEMPERATURE RISE							
OIL		65°C					
WINDING		65°C					
Tank Withstand Vacuum Pressure							
40 kPa Positive		50 kPa Negative					
JIANGSU ZHENGLAI ELECTRIC CO.,LTD MADE IN CHINA							
		2021		YEAR		6	MONTH MADE

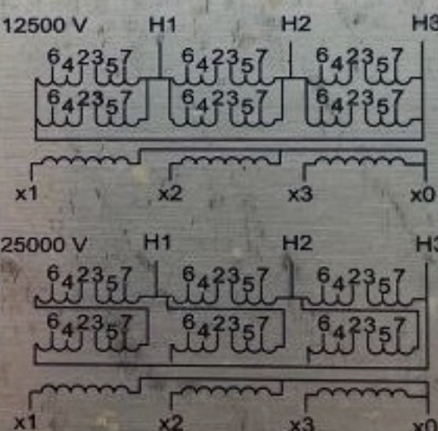