


PAD MOUNTED TRANSFORMER



STANDARDS IEEE C57.12.00
 ZG SERIES
 2500kVA HV(AL) 13800 V DELTA
 LV(AL) 415 V WYE
 TYPE OF COOLING ONAN
 PERCENT IMPEDANCE
 TYPE OF OIL TYPE II
 SERIAL NO.
 CORE & COIL (UNTANKING) LBS
 TANK & FITTINGS LBS
 LIQUID GALS LBS
 TOTAL LBS



PRODUCT NO.
 TYPE ZGSL-Z-2500/13.8
 CONDUCTOR MATERIAL ALUMINUM
 PHASE 3
 FREQUENCY 60Hz
 TEMPERATURE RISE 65°C/65°C
 DATE OF MFG.

RATED VOLTAGE	SWITCH POSITION	RATED CURRENT
14490	1	99.6
14145	2	102.0
13800	3	104.6
13455	4	107.3
13110	5	110.1

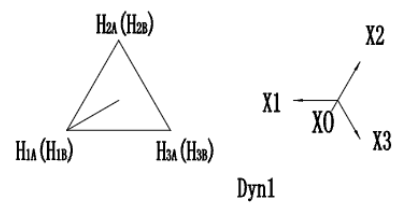

H. V. Um/BIL/AC 17/95/34 kV
 L. V. Um/BIL/AC 1.5/30/10 kV

STEP-UP OPERATION SUITABILITY. LIQUID CONTAINS LESS THAN 1 PPM PCB AT TIME OF MANUFACTURE . OPERATING PRESSURES OF LIQUID PRESERVATION SYSTEM ARE 9.5 PSIG MAX. AND -5 PSIG MIN. TANK IS DESIGNED FOR 3 PSI VACUUM FILLING.

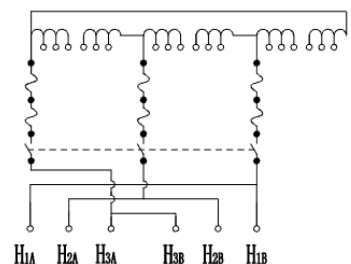

- X0
- X3
- X2
- X1
- H3B
- H2B
- H1B
- H3A
- H2A
- H1A

Installation and operating instructions
 reference: Instruction manual

TRADEMARK JSHP TRANSFORMER CO., LTD. LIYANG CITY, CHINA