


protec
CORPORATION
07/24/2024
138 000 KVA, 60 Hz, 3300 FT.
ALTIMITUDE 3300 FT.
138 000 KVA, 60 Hz, 3300 FT.
ALTIMITUDE 3300 FT.

STEP UP TRANSFORMER
ONAN / ONAF ONAF
45 / 60 / 80 MVA
60 HZ, THREE PHASE, 60°C, 3300 FT.
138/79.67 KV - 34.5/19.92 KV
TERTIARY (15.75/21/26.25 MVA) 13.8 KV

PROLEC GE SERIAL N. : G5040-01

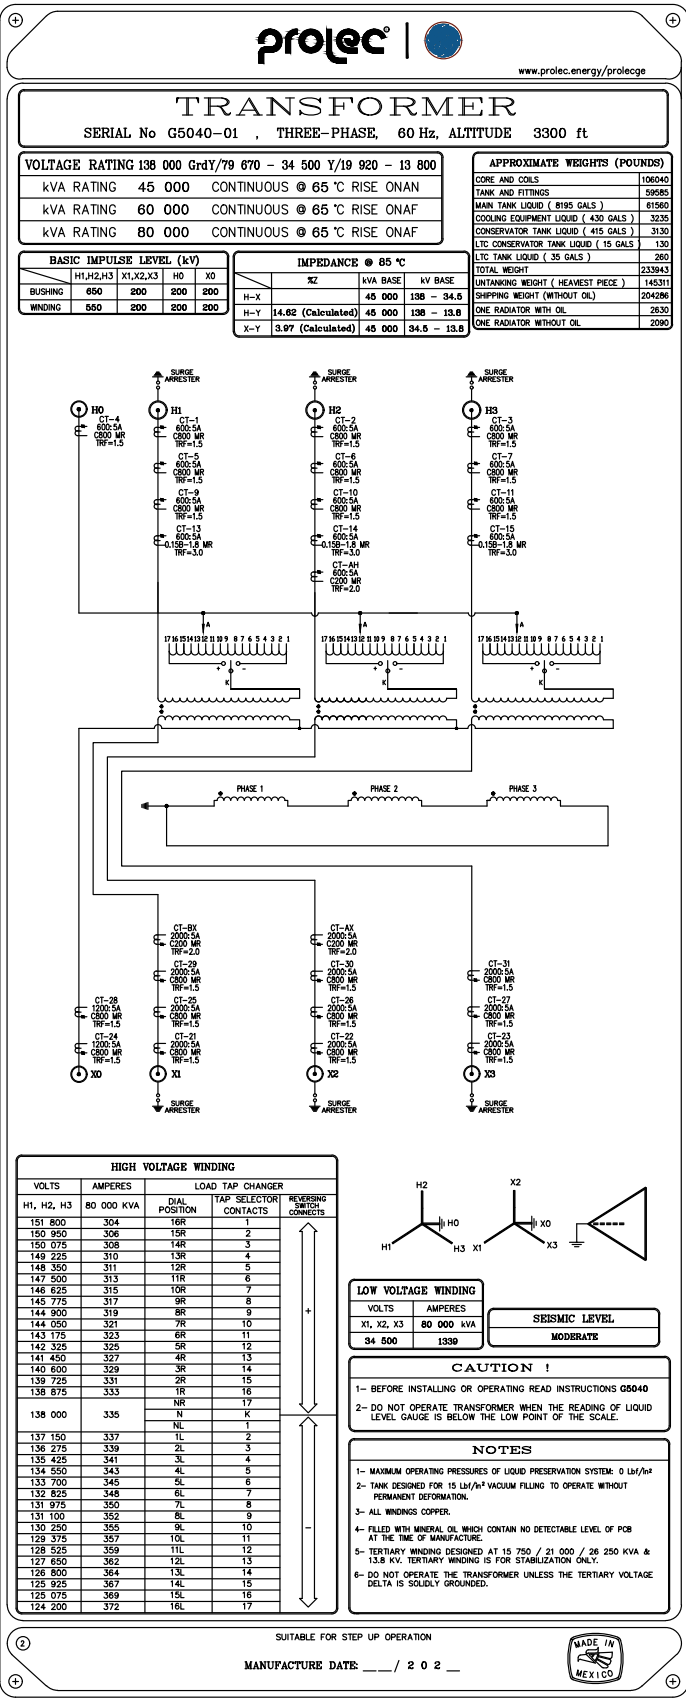

1 APR 07/24/2024
REV. DESCRIPTION
DESIGN GROUP LPT-4
PROLEC GE ENGINEERING POWER DIVISION
THIS DRAWING CONTAINS INFORMATION THAT IS UNCLASSIFIED AND NOT CONTROLLED BY PROLEC GE. IT IS THE PROPERTY OF PROLEC GE. IT IS TO BE USED ONLY FOR THE PROJECT AND NOT BE REPRODUCED OR TRANSMITTED IN ANY FORM OR BY ANY MEANS, ELECTRONIC OR MECHANICAL, INCLUDING PHOTOCOPYING, RECORDING, OR BY ANY INFORMATION STORAGE AND RETRIEVAL SYSTEM, WITHOUT PERMISSION OF PROLEC GE.
DATE: 11/10/23
BY: RSR
FOR: RSR
SCALE: N/A
DIMENSIONS: IN
PRODUCTION
G504001802
REV. 1.0/1

TRANSFORMER DESIGNED FOR A NOMINAL IMPEDANCE H-X OF 9.0 % @ 45 000 KVA.
THE ACTUAL MEASURED IMPEDANCE VALUE WILL BE SHOWN ON THE NAMEPLATE.

MATERIAL: STAINLESS STEEL/ BLACK BACKGROUND
DIMENSIONS: 25.5" x 12"

