

Western Pacific Products, Inc.

Anything In Or On Your Tank – Ready to Ship

Over 8,000 Part Numbers – Over 26,000 Square Feet of Warehouse – We Ship Worldwide

Hydrolet Valve

QUICK CLEAN STYLE

EXCLUSIVE QUICK CLAMP

SEAMLESS CONSTRUCTION

EASILY CLEANED

The Betts Q.R.B. Quick Clean Hydrolet Valve with the Quick-Removable Bonnet and seamless construction is a valve designed for quick dismantling and easy cleaning. Valve is available in the two styles shown below. Valve comes standard with Teflon disc, packing and gasket.

Pressure & Temperature Rating: 35 PSI and 250°F, maximum working pressure and temperature.

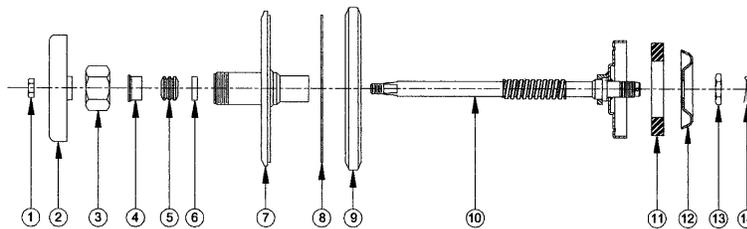
Size	Dimensions			
	A	B	C	F
3"	12½	5½	6 ¹ / ₁₆	7½
3"	12½	5½	6 ¹ / ₁₆	7½

Size	Assembly No.	Wt.	Material
3"	QC763SST Flanged Outlet	16.0	316 stnls.
3"	QC773SST Threaded Outlet	16.0	316 stnls.

Size	Dimensions			
	D	E	I.D.	B.C. O.D.
3"	11	7½	3 ³ / ₈	5 ⁹ / ₈
3"	11	7½	3 ³ / ₈	5 ⁹ / ₈

Assembly No.	Wt.	Material
QC703SST Flanged Outlet	17.5	316 stnls.
QC713SST Threaded Outlet	17.5	316 stnls.

Size	A	B	C	D	E	F	G	Flanged Inlet & Outlet				Thd. Outlet
								I.D.	O.D.	B.C.	Holes	Pipe Size
3"	12½	5½	6 ¹ / ₁₆	11	7½	7 ¹³ / ₁₆	7½	3 ³ / ₈	5 ⁹ / ₈	4 ¹ / ₈	8 ⁻ / ₁₆	3"



Parts List

No.	Description	Req'd	Material	Part No.	No.	Description	Req'd	Material	Part No.
1	1/16-14UNC-2A Hex Nut	1	Steel	9Q8580	8	Tophead Gasket	1	Teflon	15977TF
2	Handwheel	1	Alum.	25186AL	9	Clamp Ring Assembly	1	Stnls.	25683SL
3	Stuffing Box Nut	1	Stnls.	15026SL	10	Disc Holder & Stem Assembly	1	Stnls.	17683SS
4	Top Gland	1	Stnls.	15220SS	11	Disc	1	Teflon	15202TF
5	Teflon Packing	1	Teflon	19649TF	12	Disc Retainer Plate	1	Stnls.	17028SS
6	Bottom Gland	1	Stnls.	15076SS	13	Disc Plate Nut	1	Stnls.	15204SS
7	Tophead & Bonnet	1	Stnls.	16126SS	14	1/8x 1 Cotter Pin	1	Stnls.	9Q5867

NOTE: For complete replacement sub-assembly (items 1-14) order Part No. WV17625SST.

Betts[™]
INDUSTRIES, INC.
WARREN, PA.

800-677-3711

Signal Hill, (L.A.) CA

(562) 490-0030 • Fax (562) 490-0091

West Sacramento, CA

(916) 371-1622 • Fax (916) 371-4792

Dallas/Fort Worth, TX

(817) 740-8077 • (817) 740-1332

Portland, OR

(503) 221-0335 • Fax (503) 221-0911

www.tankparts.com

2-20

Western Pacific Products, Inc.

Anything In Or On Your Tank – Ready to Ship

Over 8,000 Part Numbers – Over 26,000 Square Feet of Warehouse – We Ship Worldwide

HYDROLET VALVES

Q.R.B. HYDROLET

Quick Removable Bonnet

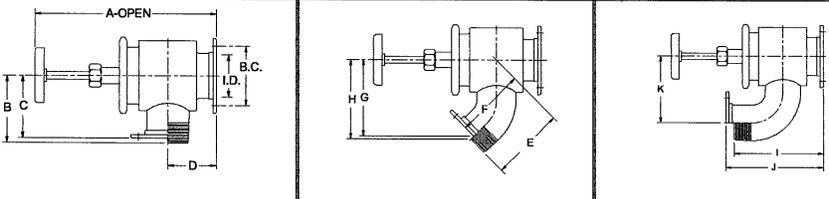
EXCLUSIVE QUICK CLAMP

VERSATILE

EASILY CLEANED

The Betts Q.R.B. Hydrolet Valve with the Quick-Removable Bonnet, is designed for use on transport tanks hauling a variety of products, where easy dismantling for cleaning and inspection are essential. Valve is available in the three styles shown below in 3" and 4" sizes with flanged or threaded outlets.

Pressure And Temperature Rating: Valves are rated at 35 PSI maximum working pressure. Temperature varies as to which packing, gasket & disc material is used. Valves with Teflon, Viton or Non-Asbestos are rated at 250°F maximum working temperature. Valves with Buna-N are rated at 150°F maximum working temperature.

DIMENSIONS	FLANGED			THREADED							
	Size	Assembly No.	Wt.	Material	Assembly No.	Wt.	Material				
	3"	QR723ALB	9.3	Alum.	QR763ALB	9.5	Alum.	QR703ALB	10.3	Alum.	
			QR723SST	15.0	Stnls. 316	QR763SST	15.3	Stnls. 316	QR703SST	16.0	Stnls. 316
		4"	QR724ALB	13.0	Alum.	QR764ALB	14.0	Alum.	QR704ALB	14.3	Alum.
			QR724SST	19.8	Stnls. 316	QR764SST	20.3	Stnls. 316	QR704SST	20.5	Stnls. 316
THREADED	3"	QR733ALB	8.8	Alum.	QR773ALB	9.0	Alum.	QR713ALB	10.0	Alum.	
		QR733SST	14.0	Stnls. 316	QR773SST	14.3	Stnls. 316	QR713SST	15.0	Stnls. 316	
	4"	QR734ALB	13.0	Alum.	QR774ALB	14.0	Alum.	QR714ALB	14.3	Alum.	
		QR734SST	19.8	Stnls. 316	QR774SST	20.3	Stnls. 316	QR714SST	20.5	Stnls. 316	

NOTE: Stainless 316 valves are standard with Teflon disc, gasket & packing (Suffix "T"). Aluminum valves are standard with Buna-N disc, cork-buna-N gasket and Teflon packing (Suffix "B"). For variations and replacement parts see section 10, page 5B.

Dimensions

Size	A	B	C	D	E	F	G	H	I	J	K	Flange-Inlet & Outlet			Thd. Outlet Pipe Size
												I.D.	B.C.	Holes	
3"	15	5½	5⅛	4	6 ⁹ / ₁₆	6¾	6¾	7	8 ⁹ / ₁₆	9 ⁵ / ₈	6½	3 ³ / ₈	4 ¹ / ₈	8 ⁻ / ₁₆	3"
4"	15 ³ / ₁₆	6 ¹ / ₁₆	5	4 ⁵ / ₁₆	8 ¹ / ₈	7¾	8 ⁵ / ₁₆	8 ⁹ / ₁₆	10 ⁹ / ₁₆	10¼	8	4 ³ / ₈	5 ¹ / ₈	8 ⁻ / ₁₆	4"

Betts[™] INDUSTRIES, INC.
WARREN, PA.

800-677-3711

Signal Hill, (L.A.) CA

(562) 490-0030 • Fax (562) 490-0091

West Sacramento, CA

(916) 371-1622 • Fax (916) 371-4792

Dallas/Fort Worth, TX

(817) 740-8077 • (817) 740-1332

Portland, OR

(503) 221-0335 • Fax (503) 221-0911

www.tankparts.com

Western Pacific Products, Inc.

Anything In Or On Your Tank – Ready to Ship

Over 8,000 Part Numbers – Over 26,000 Square Feet of Warehouse – We Ship Worldwide

HYDROLET VALVES

STEAM JACKETED

Quick Removable Bonnet

STEAM JACKETED

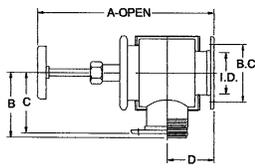

VERSATILE

EXCLUSIVE QUICK CLAMP

EASILY CLEANED

The Betts Steam Jacketed Q.R.B. Hydrolet Valve is designed to handle heavy, viscous liquids or other special products. The Quick-Removable Bonnet permits faster removal of internal parts for cleaning and inspection. This valve is available in the three styles shown below in 3" or 4" sizes with flanged or threaded outlets.

Pressure And Temperature Rating: Valves are rated at 35 PSI maximum working pressure. Temperature varies as to which packing, gasket & disc material is used. Valves with Teflon, Viton or Non-Asbestos are rated at 250°F maximum working temperature. Valves with Buna-N are rated at 150°F maximum working temperature. Steam jacket rated at 150 PSI maximum working pressure.

DIMENSIONS	FLANGED			THREADED						
	Size	Assembly No.	Wt.	Material	Assembly No.	Wt.	Material	Assembly No.	Wt.	Material
	3"	JQ723SST	18.0	Stnls. 316	JQ763SST	18.6	Stnls. 316	JQ703SST	18.9	Stnls. 316
	4"	JQ724SST	25.0	Stnls. 316	JQ764SST	26.5	Stnls. 316	JQ704SST	27.3	Stnls. 316
	3"	JQ733SST	18.0	Stnls. 316	JQ773SST	18.6	Stnls. 316	JQ713SST	18.9	Stnls. 316
	4"	JQ734SST	25.0	Stnls. 316	JQ774SST	26.5	Stnls. 316	JQ714SST	27.3	Stnls. 316

NOTE: Stainless 316 valves are standard with Teflon disc, gasket & packing (Suffix "T"). For variations and replacement parts see section 10, page 5B. Jacket material on stainless valves is of a stainless 304 material. Steam connections are 1/2" NPT.

Dimensions

Size	A	B	C	D	E	F	G	H	I	J	K	Flange-Inlet & Outlet			Thd. Outlet Pipe Size
												I.D.	B.C.	Holes	
3"	15	5 1/2	5 1/8	4	6 9/16	6 1/4	6 3/4	7	8 13/16	9 5/8	6 1/2	3 7/8	4 1/8	8 - 7/16	3"
4"	15 7/16	6 1/16	5	4 5/16	8 1/8	7 3/4	8 5/16	8 9/16	10 9/16	10 1/4	8	4 3/8	5 1/8	8 - 1/16	4"

Betts[™]
INDUSTRIES, INC.
WARREN, PA.

800-677-3711

Signal Hill, (L.A.) CA

(562) 490-0030 • Fax (562) 490-0091

West Sacramento, CA

(916) 371-1622 • Fax (916) 371-4792

Dallas/Fort Worth, TX

(817) 740-8077 • (817) 740-1332

Portland, OR

(503) 221-0335 • Fax (503) 221-0911

www.tankparts.com

2-22

Western Pacific Products, Inc.

Anything In Or On Your Tank – Ready to Ship

Over 8,000 Part Numbers – Over 26,000 Square Feet of Warehouse – We Ship Worldwide

STEAM JACKETED



Quick Removable Bonnet
Outside Screw and Yoke

HYDROLET VALVES

EXCLUSIVE QUICK CLAMP
OUTSIDE THREAD
EASILY CLEANED

This valve has the same features as our standard Q.R.B. Steam Jacketed Valve but with the advantage of having an outside screw and yoke. Valve is also available in the three styles shown below in 3" or 4" sizes with flanged or threaded outlets.

Pressure And Temperature Rating: Valves are rated at 35 PSI maximum working pressure. Temperature varies as to which packing, gasket & disc material is used. Valves with Teflon, Viton or Non-Asbestos are rated at 250°F maximum working temperature. Valves with Buna-N are rated at 150°F maximum working temperature. Steam jacket rated at 150 PSI maximum working pressure.

DIMENSIONS	FLANGED			THREADED			FLANGED			THREADED			
	Size	Assembly No.	Wt.	Material									
	3"	JY723SST	18.8	Stnls. 316	JY763SST	19.4	Stnls. 316	JY703SST	19.7	Stnls. 316	JY703SST	19.7	Stnls. 316
	4"	JY724SST	26.0	Stnls. 316	JY764SST	27.5	Stnls. 316	JY704SST	28.3	Stnls. 316	JY704SST	28.3	Stnls. 316
	3"	JY733SST	18.8	Stnls. 316	JY773SST	19.4	Stnls. 316	JY713SST	19.7	Stnls. 316	JY713SST	19.7	Stnls. 316
	4"	JY734SST	26.0	Stnls. 316	JY774SST	27.5	Stnls. 316	JY714SST	28.3	Stnls. 316	JY714SST	28.3	Stnls. 316

NOTE: Stainless 316 valves are standard with Teflon disc, gasket & packing (Suffix "T"). For variations and replacement parts see section 10, page 5B. Jacket material on stainless valves is of a stainless 304 material. Steam connections are 1/2" NPT.

Dimensions

Size	A	B	C	D	E	F	G	H	I	J	K	Flange-Inlet & Outlet			
												I.D.	B.C.	Holes	Thd. Outlet Pipe Size
3"	17 ⁵ / ₁₆	5 1/2	5 1/8	4	6 ⁹ / ₁₆	6 1/4	6 3/4	7	8 ¹³ / ₁₆	9 ⁵ / ₈	6 1/2	3 3/8	4 1/8	8- ⁷ / ₁₆	3"
4"	18 ³ / ₈	6 1/16	5	4 ⁹ / ₁₆	8 1/8	7 3/4	8 ⁵ / ₁₆	8 ⁹ / ₁₆	10 ⁹ / ₁₆	10 1/4	8	4 ³ / ₈	5 1/8	8- ⁷ / ₁₆	4"

Betts[™]
INDUSTRIES, INC.
WARREN, PA.

800-677-3711

Signal Hill, (L.A.) CA
(562) 490-0030 • Fax (562) 490-0091

West Sacramento, CA
(916) 371-1622 • Fax (916) 371-4792

Dallas/Fort Worth, TX
(817) 740-8077 • (817) 740-1332

Portland, OR
(503) 221-0335 • Fax (503) 221-0911

www.tankparts.com

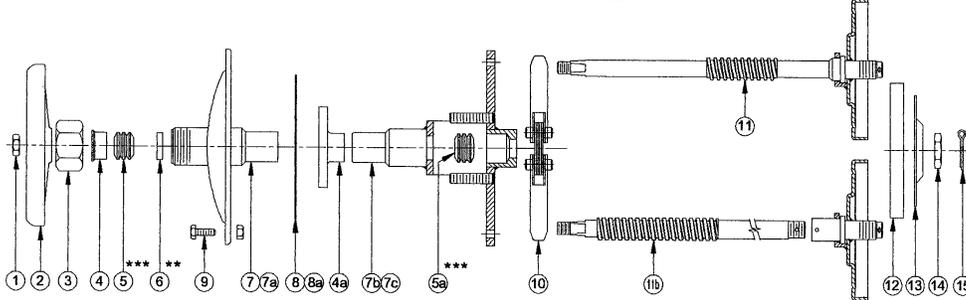
Western Pacific Products, Inc.

Anything In Or On Your Tank – Ready to Ship

Over 8,000 Part Numbers – Over 26,000 Square Feet of Warehouse – We Ship Worldwide

PARTS LIST

Hydrolet Valves



No.	Description	Req'd.	Size	Material	Part No.
1	Hex Nut 7/16"-14 Thd.	1	3"-4"	Steel Zinc Plt.	9Q8579
2	Handwheel	1	3"	304 Stnls	9Q8580
			4"	Aluminum	25198AL
3	Stuffing Box Nut	1	3"-4"	Aluminum	25245AL
			4"	Aluminum	15026AL
4	Top Gland	1	3"-4"	316 Stnls	15220SS
4a	Top Gland OS&Y Style	1	3"-4"	304 Stnls	19648TF
5	Teflon Packing	1	3"-4"	Teflon	19648TF
5a	Teflon Packing	1	3"-4"	Teflon	19648TF
6	Bottom Gland	1	3"-4"	316 Stnls	15076SS
7	Tophead & Bonnet Bolted Style	1	3"	Steel	15362MS
			4"	Aluminum	25382AL
			4"	Steel	25365MS
			4"	Aluminum	25365AL
7a	Tophead & Bonnet QRB Style	1	3"	316 Stnls	15573SS
			4"	Aluminum	15573AL
			4"	316 Stnls	16126SS
7b	Tophead & Bonnet QRB OS&Y	1	3"	Aluminum	16126AL
			4"	316 Stnls	26133SS
			4"	Aluminum	26133AL
7c	Tophead & Bonnet Bolted OS&Y	1	3"	316 Stnls	26138SS
			4"	Aluminum	26138AL
			4"	Steel	26145MS
8	Tophead Gasket Bolted Style	1	3"	Aluminum	26145AL
			4"	Steel	26150MS
			4"	Aluminum	26150AL
			3"	Cork-Buna-N	15022CB
			3"	Non-Asbestos	15022NA
8a	Tophead Gasket QRB Style	1	3"	Teflon-Env.	15022TF
			4"	Cork-Buna-N	15265CB
			4"	Non-Asbestos	15265NA
8b	Teflon-Env.	15265TF			

No.	Description	Req'd.	Size	Material	Part No.
8a	Tophead Gasket QRB Style	1	3"	Cork-Buna-N	15905CB
			4"	Teflon-Env.	15905TF
			4"	Cork-Buna-N	15977CB
9	Bolts & Nuts (Sets)	Set	3"	Teflon-Env.	15977TF
			4"	Steel Zinc Ptl.	15023ZC
			4"	18-8 Stnls	15023S
10	QRB Clamp	1	3"	Steel Zinc Ptl.	16549ZC
			4"	18-8 Stnls	16549SL
			4"	304 Stnls	25641SL
11	Disc Holder & Stem Assy. Bolted & QRB Style	1	3"	304 Stnls	26683SL
			4"	All Aluminum	17683AL
			4"	All Steel	17683MS
11a	Disc Holder & Stem Assy. OS&Y Style	1	3"	All Stnls	17683SS
			4"	All Aluminum	17684AL
			4"	All Steel	17684MS
12	Disc	1	3"	All Stnls	17684SS
			4"	Steel	28003MS
			4"	316 Stnls	28003SS
			4"	Steel	28004MS
			4"	316 Stnls	28004SS
13	Disc Retaining Plate	1	3"	Non-Asbestos	15202NA
			4"	Teflon	15202TF
			4"	Viton	15202VT
			4"	Buna-N	15024BU
			4"	Non-Asbestos	15024NA
14	Disc Plate Nut	1	3"-4"	316 Stnls	15024SS
15	Cotter Pin 1/16x1	1	3"-4"	316 Stnls	9Q5867

** This part note req'd. on OS&Y Models

* 2 Req'd. on OS&Y Models

*** Note:
No. 5 used with Std. Bonnet Models only.
No. 5a used with OS&Y Models only.

HYDROLET SUB-ASSEMBLIES

Size	Hydrolet Material	Bolted Style	Bolted OS&Y Style	QRB Style	QRB-OS&Y Style
3"	Steel	WV17593MSB	WV17607MSB		
	Aluminum	WV17593ALB	WV17607ALB	WV17609ALB	WV17611ALB
4"	Steel	WV17594MSB	WV17608MSB	WV17609SS	WV17611SS
	Aluminum	WV17594ALB	WV17608ALB	WV17610ALB	WV17612ALB
	316 Stnls.			WV17610SST	WV17612SST

NOTES: Cotter pins only provided on sub-assemblies ordered with either Teflon or Non-Asbestos disc.
Bolted sub-assemblies do not include QRB clamp (Item #10)
QRB sub-assemblies do not include Bolts & Nuts (Item #9)
Steel and Aluminum sub-assemblies are standard with Buna-N disc, Cork-Buna-N Gasket and Non-Asbestos packing (Suffix "B").
Stainless sub-assemblies are standard with Teflon disc, packing and gasket (Suffix "T").
VARIATIONS: (Suffix "A"-Bolted Style) when used would include non-asbestos disc, packing and gasket.
(Suffix "A"-QRB Style) when used would include non-asbestos disc, packing and teflon gasket.
(Suffix "V"-Bolted or QRB Style) when used would include viton disc, teflon packing and gasket.

WARNING Use only genuine Betts Industries Inc. replacement parts. Use of substitute parts can impair the proper functioning of this product.

Betts
INDUSTRIES, INC.
WARREN, PA.

800-677-3711

Signal Hill, (L.A.) CA

West Sacramento, CA

Dallas/Fort Worth, TX

Portland, OR

(562) 490-0030 • Fax (562) 490-0091

(916) 371-1622 • Fax (916) 371-4792

(817) 740-8077 • (817) 740-1332

(503) 221-0335 • Fax (503) 221-0911

www.tankparts.com