


Western Pacific Products, Inc.

Anything In Or On Your Tank – Ready to Ship

Over 8,000 Part Numbers – Over 26,000 Square Feet of Warehouse – We Ship Worldwide

FUSIBLE PLUG- (1½" and 2" I.P.S.)

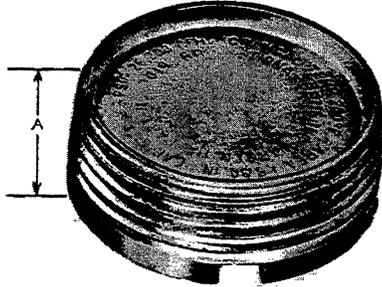

FUSIBLE PLUGS

Fusible Plugs provide a means of emergency venting which depends only on temperature. Plugs are designed to melt and blow out at a maximum temperature of 250° F. These Fusible Plugs have been flow tested and marked in accordance with Nat. Fire Protection Assn. No. 385 (1964) Par. 2263 and No. 407 (1964) Par. 616 and DOT MC306 Par. 78.341-4.

| Size | Temp. Release | Rated Capacity @ 5 psig. |
|--------|---------------|--------------------------|
| 1½ IPS | 250° F. Max. | 26,200 cu. ft. hr. |
| 2 IPS | 250° F. Max. | 53,000 cu. ft. hr. |

| Material | | Thread Size | A | Wt. | Fusible Plug Part No. |
|-----------------|-----------------|-------------|-----|---------|-----------------------|
| Body | Disc | | | | |
| Brass | Brass | 1½ I.P.S. | 5/8 | 2 oz. | P 3019 BR |
| Stainless 316 | Stainless 316 | | 1¾ | | P 3019 SS |
| Steel | Steel | 2 I.P.S. | 1¼ | 5.5 oz. | P 3322 MS |
| Steel Cad. Plt. | Steel Cad. Plt. | | | | P 3322 CP |
| Stainless 316 | Stainless 316 | | | | P 3322 SS |




FUSIBLE PLUG

Aluminum — 2131
Brass — 2132

The Fusible Plugs are made of aluminum or brass — 2" — with male threads.

Certified venting capacity — 52,500 CHF @ 5 PSI
Releases at not more than 250 degrees F.

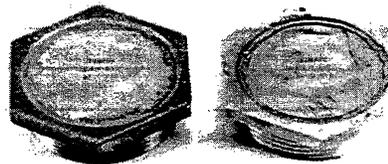

FUSIBLE PLUG

Aluminum — 2133
Brass — 2134

This Fusible Plug is available in either aluminum or brass. It is 3" with male threads.

Certified venting capacity — 130,400 CHF @ 5 PSI
Releases at not more than 250 degrees F.

800-677-3711

Signal Hill, (L.A.) CA

(562) 490-0030 • Fax (562) 490-0091

West Sacramento, CA

(916) 371-1622 • Fax (916) 371-4792

Dallas/Fort Worth, TX

(817) 740-8077 • (817) 740-1332

Portland, OR

(503) 221-0335 • Fax (503) 221-0911

www.tankparts.com

1-181