



MINI SCREW FEEDER





ADVANTAGES

> Suitable for mini and micro screws

- For medical technology
- In the optical industry
- For the manufacture of electronic products and components
- In precision engineering

> A feeding system

Suitable for stationary and handheld tools



> Reliable feeding

Feed disc stops precisely in the pick position

> Flexible

Can react quickly to different screw sizes by simply changing the feed disc



> Important communication interfaces


- Standard I/O interface
 - > Signal "screw in pick position"
 - > Signal "screwdriver start release"
 - > Signal for screw fill level

> Robust/efficient/compact

- Screw container and feed disc made from non-corrosive stainless steel
- Low wear
- Small dimensions



Dimensions

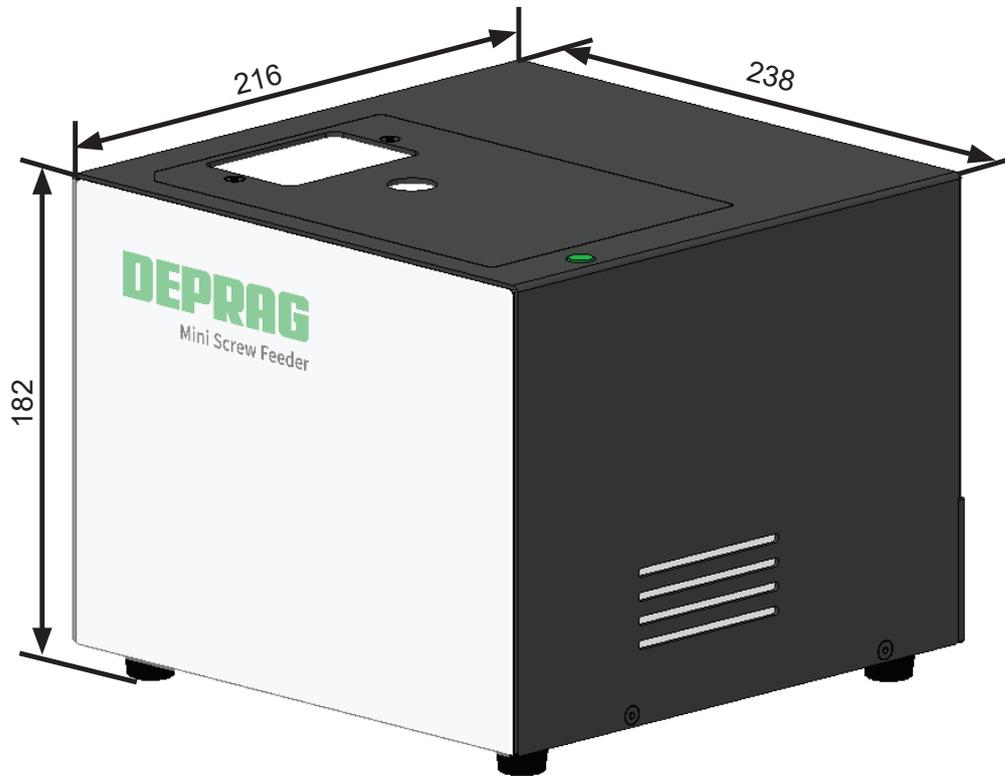

Technical data - Mini Screw Feeder			
Material to be conveyed		Screws	
Version		Stationary	Manual
Type		C01511-EP/0.05	C11511-EP/0.05
Feed rate approx.	parts/min	30	30
Filling capacity	l	0.05	0.05
Voltage	V/Hz	220	220
Power consumption	VA	50	50
Dimensions (WxDxH)	mm	238x216x182	238x216x182
Weight	kg	8	8
Max. head diameter	mm	3	3
Max. shaft length	mm	3.5	3.5
Range of shaft diameter	mm	0.8-1.4	0.8-1.4

DEPRAG

DEPRAG SCHULZ GMBH u. CO.

P.O. Box 1352, D-92203 Amberg, Germany
Carl-Schulz-Platz 1, D-92224 Amberg
Phone (+49) 9621 371-0, Fax (+49) 9621 371-120
www.deprag.com
info@deprag.de

D3836E | 11.2022

© DEPRAG. All rights and technical alterations reserved - Fri