





SUMMARY

About Street Co'	03
Transparent LED	07
LED Mesh	15
Touch Fine Pitch	19
Flexible LED	21

• Indoor LED

Outdoor LED

- Floor LED
- LCD



23

25

27

29

ABOUT US

Street Communication is one of the leading LED screen companies, providing custom LED screens to satisfy any customer's needs. Founded in London, United Kingdom in 2012, Street Communication's headquarter is now based in Paris, France. We are a multinational company composed of manufacturers, designers, architects and engineers with more than ten years experience working with LED.

We are trained to work with LED on unconventional shapes and modern designs. Our products are new, innovative, as well as elegant and sophisticated. We have a lot of experience working with flexible and bendable LED panels to create columns, cylinders, as well as transparent LED solutions for shop, windows and facade buildings.



HOW DOWE WORK?





INSTALLATION

- On site integration
- Installation




MAINTENANCE

• 2 years guarantee



CONSULTANCY

- Target the need
- Personal guide





MANUFACTURING

- Best quality product
- Less energy used
- Minimum purchase & production cost





Project drawing





ENGINEERING

- Virtual creation of the project
- Immersion
- Specific details


www.streetcommunication.com















TYPE OF

COMTENIS

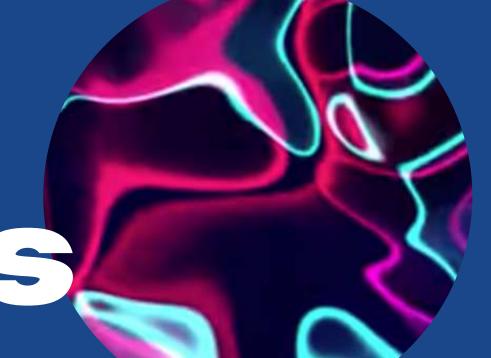
















TRANSPARENTLED

Standard Transparent



- Indoor & Outdoor use
- Easy installation
- High transparency
- Modular design
- Customizable



Light weight



Free noise



Very resistant



High brightness



Easy maintenance







PITCH PIXEL	2.6 mm / 3.9 mm / 7.8 mm/ 10 mm / 12 mm / 15 mm / 20 mm / 30 mm				
MODULE WEIGHT	13 kg/m2	13 kg/m2	12 kg/m2	10 kg/m2	
BRIGHTNESS LEVEL	5000- 5500 CD/m2	5000- 5500 CD/m2	5000- 5500 CD/m2	5000- 5500 CD/m2	
MAX POWER CONSUP	< 720	< 720	< 720	< 720	
AVE POWER CONSUP	< 260	< 260	< 260	<260	
VIEWING ANGLE	140°/140°	140°/140°	140°/140°	140°/140°	
REFRESH RATE	> 1920Hz	> 1920Hz	> 1920Hz	> 1920Hz	
TRANSPARENCY	75%	80%	85%	90%	



TRANSPARENTLED

Adhesive





- Indoor
- Flexible
- Modular design
- Customizable
- High transparency



Light weight



Free noise



Very resistant





High brightness



Easy maintenance







PITCH PIXEL	4 x 8 mm	6 mm	8 mm
MODULE WEIGHT	3.5 kg	3.5 kg	3.5 kg
BRIGHTNESS LEVEL	< 5000	< 5000	< 5000
MAX POWER CONSUP	< 950	< 900	< 950
AVE POWER CONSUP	< 320	< 320	<320
VIEWING ANGLE	160°/160°	160°/160°	160°/160°
REFRESH RATE	> 1920Hz	> 1920Hz	> 1920Hz
TRANSPARENCY	55%	50%	55%

STREET CO

1. Tear open the release liner

2. Adhere screen to glass

3. Connect the signal


PITCH PIXEL	10 mm	16 mm	20 mm
MODULE WEIGHT	3.5 kg	3.5 kg	3.5 kg
BRIGHTNESS LEVEL	< 5000	< 5000	< 5000
MAX POWER CONSUP	< 700	< 650	< 650
AVE POWER CONSUP	< 230	< 210	< 210
VIEWING ANGLE	160°/160°	160°/160°	160°/160°
REFRESH RATE	> 1920Hz	> 1920Hz	> 1920Hz
TRANSPARENCY	80%	80%	83%

4. Connect the power supply.



TRANSPARENTLED

• Inglass

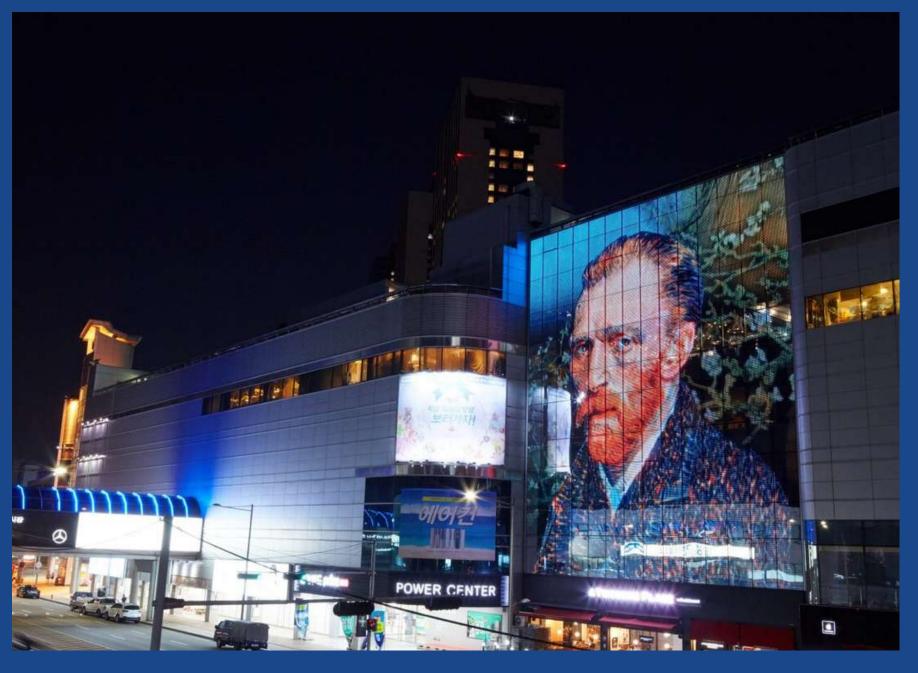

- Indoor & Outdoor use
- Easy installation
- Customizable
- High-end LED lamp brand
- Very resistant



Light weight



Durability



Cost efficiency




High brightness



Integrated accessoiries



PITCH PIXEL	20 mm / 30 mm /40 mm / 60 mm					
MODULE WEIGHT	Standard : 32 kg Typical IGU type : 50 kg	Standard : 32 kg Typical IGU type : 50 kg	Standard : 32 kg Typical IGU type : 50 kg			
BRIGHTNESS LEVEL	3500 nits	2200 nits	5000 nits			
MAX POWER CONSUP	135W/DC	180W/DC	180W/DC			
SMPS POWER (typically operate at 80% capacity	17() W/I)(:	220 W/DC	220 W/DC			
VIEWING ANGLE	140°/140°	140°/140°	140°/140°			
LUMINOUS FLUX	1,085 {lm}	340 {lm}	350 {lm}			
IP RATING	IP67	IP67	IP67			

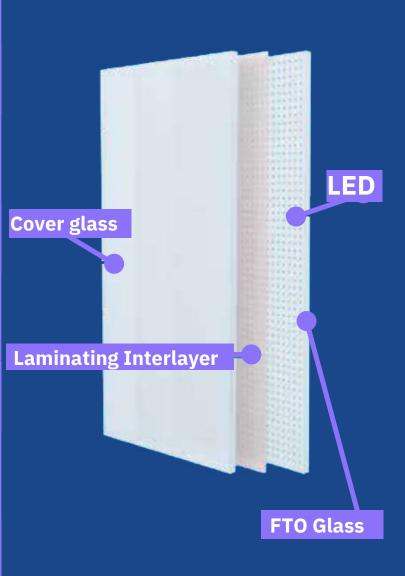



LED MESH

• Curtain / Strips



- Outdoor use
- Transparent
- Easy maintenance
- Quick installation
- Robust



Safety



Energy saving




Portable



High brightness



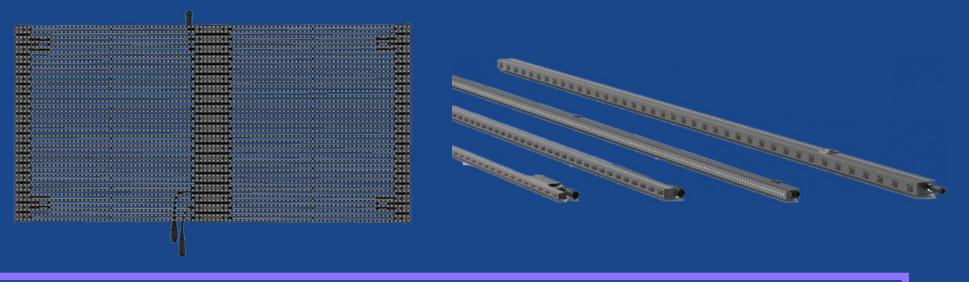

PITCH PIXEL	15 mm	25 mm	31,25 mm	50 mm
MODULE WEIGHT	18 kg	14 kg	11 kg	9 kg
BRIGHTNESS LEVEL	8500	7500	7000	6500
MAX POWER CONSUP	800	500	500	500
AVE POWER CONSUP	240	150	150	150
VIEWING ANGLE	110°/160°	110°/160°	110°/160°	110°/160°
REFRESH RATE	> 3840Hz	> 3840Hz	> 1920Hz	> 3840Hz
PROTECTING RATING	IP66	IP66	IP66	IP66



LED MESH

• Flexible MESH



- Indoor & Outdoor use
- Transparent
- Easy maintenance
- Quick installation
- Robust



Safety



Energy saving



Good flexibility





Portable



High brightness





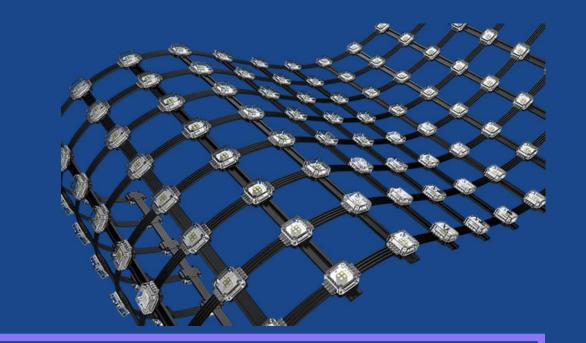

PIXEL PITCH	35mm / 40 mm / 55 mm / 100mm / 110mm / 160mm / x mm Dot1 / Dot2 / Dot4				
MODULE WEIGHT	4.6 g/pixel	4,6 g/pixel	4,6 g/pixel		
BRIGHTNESS LEVEL	2.5 CD/dot	5 CD/dot	8 CD/dot		
THE RATED VOLTAGE	DC 7.5V	DC 9V	500		
DOT POWER CONSUMPTION	0.45 W/dot	0.6 W/dot	0.9 W/dot		
VIEWING ANGLE	140°/140°	140°/140°	140°/140°		
REFRESH RATE	2000	2000	2000		
PROTECTING RATING	IP66	IP66	IP66		



TOUCH FINE PITCH



- Indoor use
- Touch screen
- Easy maintenance
- Quick installation
- Very resistant



High quality



Energy saving



Touch capacity



Easy installation



High brightness







SIZE	108 inch / 115 inch / 130 inch / 138 inch / 160 inch / 165 inch / 220 inch / 230 inch				
RESOLUTION	1600 x 900	1920 x 1080 (2K)	1920 x 1080 (2K)	3840 x 2160 (4K)	
BRIGHTNESS LEVEL	≤ 600 nits	≤ 600 nits	≤ 600 nits	≤ 600 nits	
MAX POWER CONSUP	2000 w/m ²	2000 w/m²	3000 w/m ²	4300 w/m²	
AVE POWER CONSUP	600 w/m²	1000 w/m²	1200 w/m²	2400 w/m²	
VIEWING ANGLE	160°/160°	160°/160°	160°/160°	160°/160°	
REFRESH RATE	> 1920 - 3840Hz	> 1920 - 3840Hz	> 1920 - 3840 Hz	> 1920 - 3840Hz	
MODULE WEIGHT	≤ 180kg	≤ 180kg	≤ 180kg	≤ 180kg	



FLEXIBLE LED





- Indoor & Outdoor use
- Customized your own design
- Magnetic cylinder installation
- Front maintenance
- Refresh rate up to 3840 Hz







Temperature high: 100° low: 45°



Thin





Good flexibility



Low Power



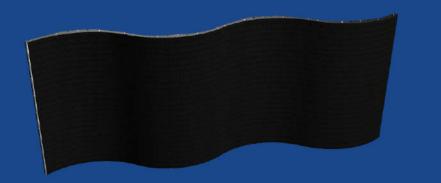

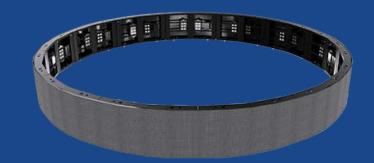

PITCH PIXEL	1.9 mm	2.5mm	3 mm	4 mm
MODULE WEIGHT	0.5kg (1.10lb)	0.5kg (1.10lb)	0.5kg (1.10lb)	0.5kg (1.10lb)
BRIGHTNESS LEVEL	500 - 800	800 - 1000	800 - 1000	1100
MAX POWER CONSUP	550 w/m²	550 w/m²	550 w/m²	500 w/m²
AVE POWER CONSUP	180 w/m²	180 w/m²	180 w/m²	167 w/m²
VIEWING ANGLE	160°/160°	120°/120°	120°/120°	110°/110°
REFRESH RATE	> 1920Hz	> 1920Hz	> 1920Hz	> 1000 - 3840Hz
PROTECTING RATING	IP43	IP43	IP43	IP43



OUTDOOR LED









- Outdoor use
- Easy maintenance
- Excellent Reliability
- Viewing Experience
- Durability



Easy installation



Temperature high: 80° low: -30°



High quality




Safety



High brightness







PITCH PIXEL		2.5mm ~ 16,7mm			
PANEL RESOLUTION	84 x 84	72 x 72	104 x 104	120 x 120	
BRIGHTNESS LEVEL	5500 ~ 8000				
MAX POWER CONSUP	800W	800W	800W	800W	
AVE POWER CONSUP	51 W ~ 63W	51 W ~ 63W	51 W ~ 63W	51 W ~ 63W	
VIEWING ANGLE	140°/90°	140°/90°	120°/55°	110°/55°	
REFRESH RATE	> 3840Hz	> 3840Hz	> 3840Hz	> 3840Hz	
PROTECTING RATING	IP65	IP65	IP65	IP65	



INDOOR LED







- Indoor use
- Viewing experience
- Energy saving
- Ultra protective function
- Very resistant







Cost efficience



Thin



High quality



High brightness








PITCH PIXEL	0,9mm ~ 4,8mm				
PANEL RESOLUTION	640 X 320	480 X 270	384 X 216	240 X 135	
BRIGHTNESS LEVEL	600	600	600	600	
ASPECT RATIO	16:9	16:9	16:9	16:9	
COLOR TEMPERATURE	2000 - 9500K Adjustable				
VIEWING ANGLE	180°/180°	180°/180°	160°/160°	160°/160°	
REFRESH RATE	> 3840Hz	> 3840Hz	> 3840Hz	> 3840Hz	
PROTECTING RATING	IP60	IP60	IP60	IP60	



FLOOR LED

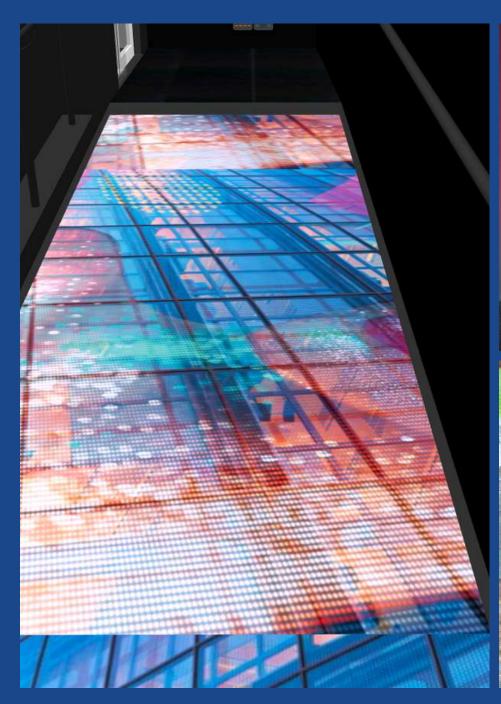





FEATURES

- Indoor & Outdoor use
- Interactive effect
- Front maintenance
- Waterproof
- High reliability



Easy installation



Customization system



Low power consp



High precision



Waterproof




27









PITCH PIXEL	2.6 mm / 2.9 mm/ 3.9 mm / 4.8 mm / 5.2 mm / 6.25 mm				
WEIGHT/m2	45 kg	45 kg	45 kg	45 kg	
BRIGHTNESS LEVEL	1800	5500 - 6000	3500	4000	
MAX POWER CONSUP	800 W/m2	720 W/m2	240 W/m2	240 W/m2	
AVE POWER CONSUP	350 W/m2	240 W/m2	80 W/m2	240 W/m2	
VIEWING ANGLE	120°/160°	160°/120°	140°/140°	140°/140°	
REFRESH RATE	> 1920Hz	> 1920Hz	> 1920Hz	> 960 - 3840Hz	
PROTECTING RATING	IP65/IP65	IP65/IP65	IP65/IP65	IP65/IP65	



LCD

• Transparent Box









- Indoor use
- Touchscreen
- LCD frame included
- Light box included
- Custom magnetic shelving



New product



Less expensive



High quality



Easy installation



Touch capacity











AVAILABLE SIZE

12 inch - 13 inch - 14 inch - 15 inch - 16 inch - 17 inch - 18 inch - 19 inch - 19 inch - 20 inch - 21 inch - 22 inch - 23 inch - 55 inch 65 inch - 86 inch - 96 inch

STANDARD VERSION: with HDMI + VGA + USB inputs

ADDITIONAL OPTIONS

- Touchscreen +
- Standalone version (with HDMI + SD + USB inputs), to auto display+

- Android system+
- Windows system+



LCD

Floor Standing



FEATURES

- Indoor use
- Touchscreen
- LDC frame included
- Customizable shape
- Ventilation : fan or air conditioner



New product



Less expensive



High quality



Easy installation



Touch capacity

AVAILABLE SIZE

43 - 49 - 55 - 65 - 75

STANDARD VERSION: with HDMI + VGA + USB inputs

ADDITIONAL OPTIONS

Display mode: HDMI Android OS RK3288 (2+8G

Windows OS

Options:

- 2000 nits
- Nano Touch capacitive
- Infrared touch
- Capacitive touch



LCD

Standard



FEATURES

- Indoor use
- Touchscreen
- Air Conditioner system
- Possible bezle between 2 LED screen (3 to 8 mm)



New product



Less expensive



High quality



Easy installation

Touch

capacity



TOUCH CAPACITIVE OPTION

Options:

- Capacitive touch
- Infrared touch

AVAILABLE SIZE

DISPLAY MODE

HDMI input

32 - 43 - 49 - 55 - 65 - 75

Nano Touch capacitive









STREET CO'DISPLAY SOLUTION EXPERT

Specialized & Customized LED Display in unconventional shapes with emphasis on design

France - UK - China - USA - Mexico - Dubai



www.streetcommunication.com

CONTACT

- France: + 331 87 39 21 90
- UK: + 44 20 37 44 67 21
- US: + 164 62 48 67 23
- China: + 86 130 5444 2516
- contact@streetcommunication.com
- marketing@streetcommunication.com
- sales@streetcommunication.com
- location@streetcommunication.com

FOLLOW US ON

- @streetcommunication
- @streetcommunication
- in Street Communication
- Street Communication
- Street Communication

HEADQUARTERS

- Paris
- Shenzhen
- London
- Boston
- Mexico
- Dubai