



I SERIES



Parameters

Model	I2.6	I4. 4-GL	I2.6	I2.9	I3.9	I4.4	I5.2	I6
Pixel Pitch (mm)	2.64.46		2.6	2.973.94.465.26.25				
LED Configuration	SMD1515(GOB)SMD1921		SMD1010(GOB)	SMD1516SMD1921SMD1921SMD1921SMD1921				
Brightness (cd/m²)	≥800≥800		≥800	≥2,600≥2,600≥2,800≥3,000≥3,000				
Module Size (WxH)(mm)	250x250250x250		250x250	250x250250x250250x250250x250250x250				
Module Resolution	96x9656x56		96x96	84x8464x6456x5648x4840x40				
Cabinet Size (WxHxD) (mm)	500x500x85500x500x101		500x500x85	500x500x85500x500x85500x500x85500x500x85500x500x85				
Cabinet Resolution	192x192 112x112		192x192	168x168128x128112x11296x96 80x80				
Cabinet Weight (kg/pcs)	1318		13	1313131313				
Power Consumption (Max/Avg) (W/m²)	600/200800/240		600/200	800/240800/240800/240800/240800/240				
Refresh Rate (Hz)	≥3840≥3840		≥3840	≥3840≥3840≥3840≥3840≥3840				
Gray Scale (Bit)	1414		14	1414141414				
Viewing Angle (H/V)	140°/ 140°140°/ 140°		140°/ 140°	140°/ 140°140°/ 140°140°/ 140°140°/ 140°140°/ 140°				
IP Rating (Front/Rear)	IP54/IP54IP54/IP54		IP54/IP54	IP54/IP54IP54/IP54IP54/IP54IP54/IP54IP54/IP54				
Interaction	None			Human-computer interaction, multi-touch				

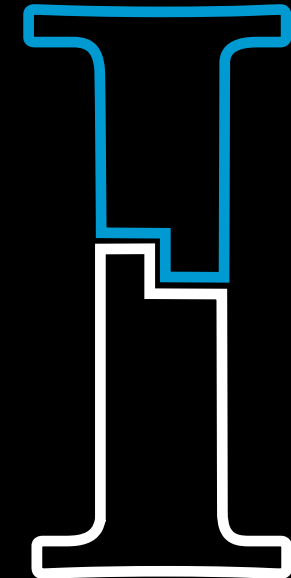


Series

I n t e r a c t i v e F l o o r D i s p l a y

DRIVE FOR EXCELLENCE

Interactive floor display is the perfect choice for brand or sellers to engage with their customers. Among all similar products, I series stands out with its unique competitive advantages. Extremely short response time, high stability and the wide viewing angle enable I series to provide the truly amazing experience for customers. With load capacity over 2000kg/sqm, it also excels in load-bearing performance.

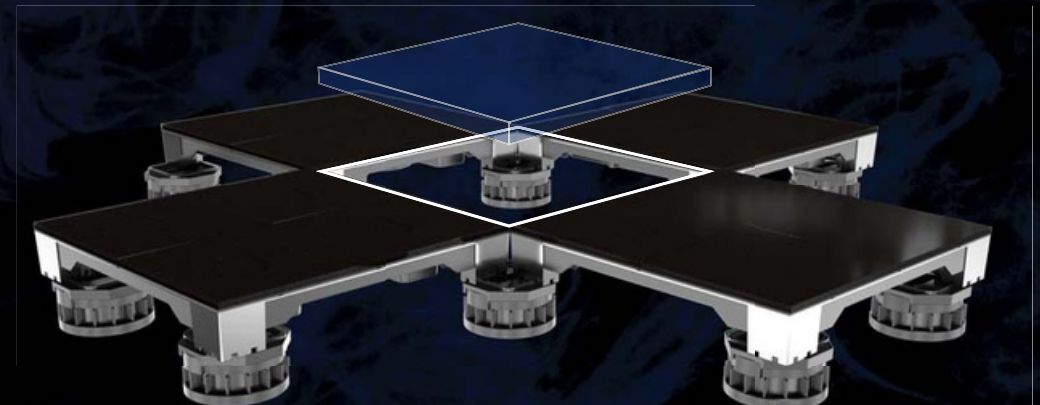




Interactive Effect (Multi-point Touch)

No delay in interactive effect, enables I series to deliver strong visual impact, providing audience a truly amazing and unforgettable experience and greatly improving their engagement.

16 Each Module
Touch points

33 Response Time
Ms

— With the built-in interactive system and 16 touch points in each module, response time is reduced to less than 0.033s.

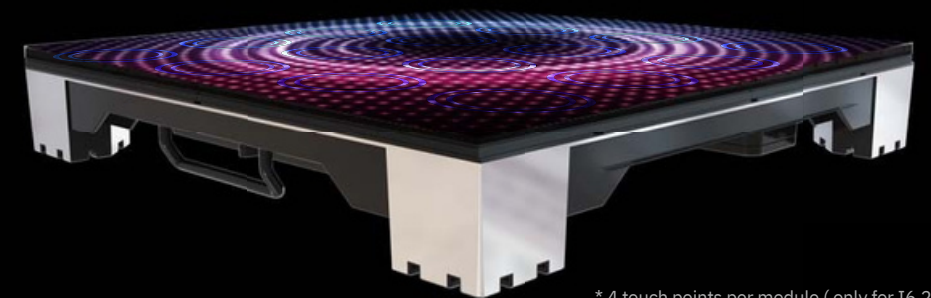

* 4 touch points per module (only for I6.25)

Highly Stable

Ensure stable performance even for long-time use, long lifespan. Stable signal and power supply, ensure safe use. Besides, with front and rear IP65 waterproof design, use requirements in different applications can be satisfied.


IP65 Waterproof Design



Easy to Service

With the magnetically fixed module design, which greatly decreases service time and improves work efficiency, module can be easily replaced within 3 seconds.

3 Seconds Service

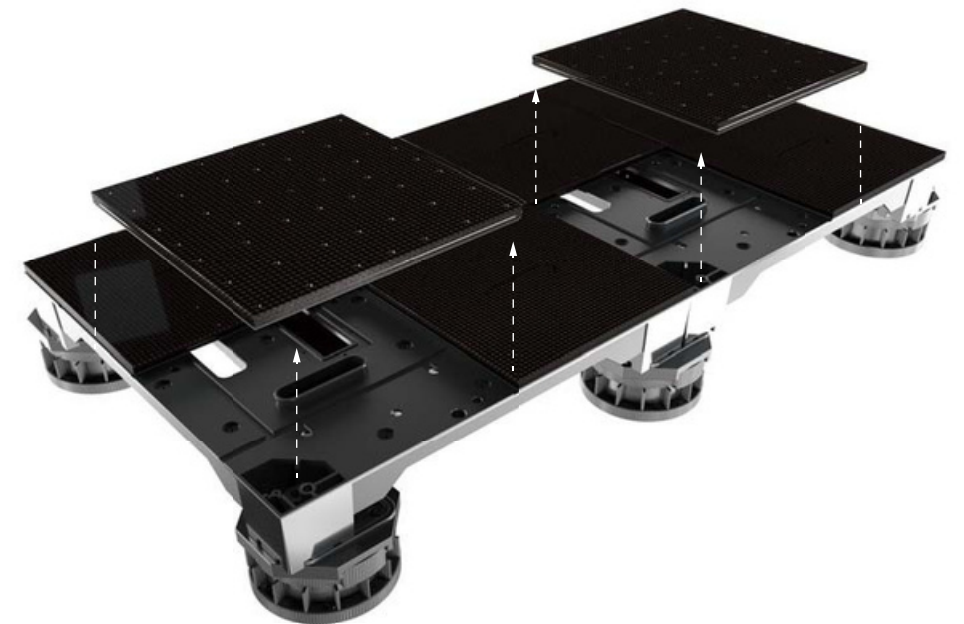

Wide Viewing Angle

Wide angle for much better viewing experience. The big screen can be clearly seen from any angle on site. Every audience can enjoy the charm of modern technology.

360° Viewing Angle

360°

Viewing Angle




STREET CO'
DISPLAY SOLUTION EXPERT
www.streetcommunication.com

www.streetcommunication.com

Adjustable in Height

The customized adjustable foot enables the height to be adjusted from 75mm to 90mm, more flexible.

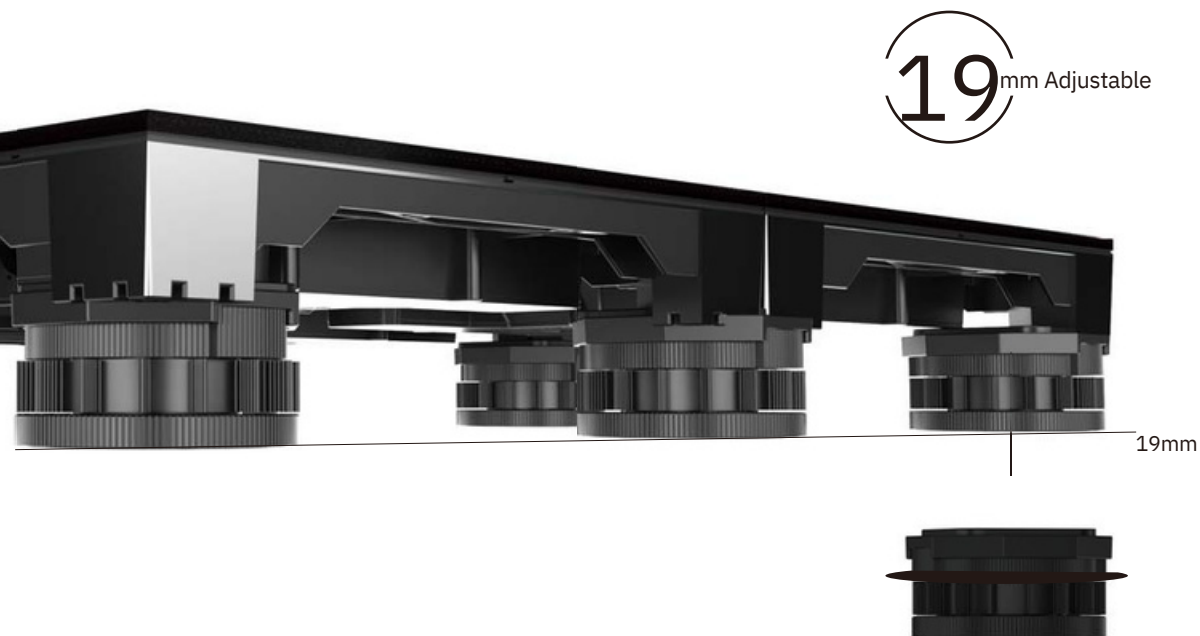

Super Strong Load-bearing Performance

Featured with point-to-face contact and support technology, its load capacity is over 2,000kg/sqm, so bearing the weight of a car is not a big deal for I series.

2000 Load Capacity
Kg/m²

