



STREET CO'
DISPLAY SOLUTION EXPERT

InnoPad INNOVATIVE FLEXIBLE LED





2023 version

01

Greater Flexibility

- Adjustable curve with angle up to $\pm 45^\circ$.
- Allow for column, right-angle, concave and convex orientations.

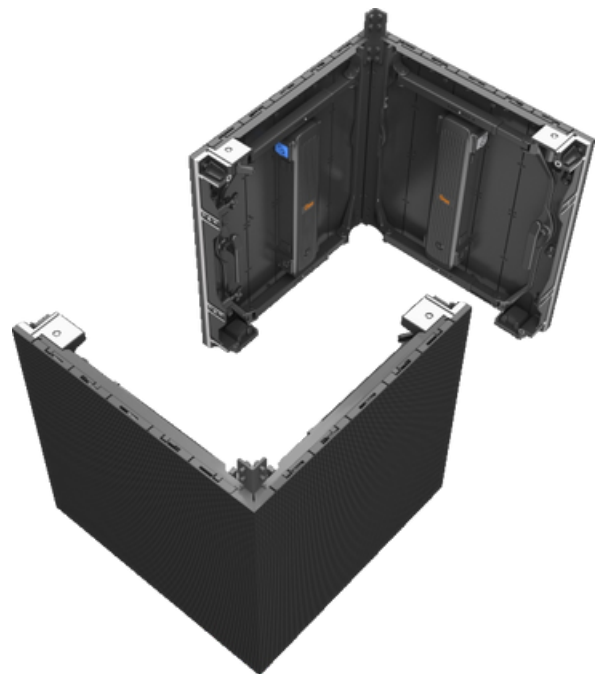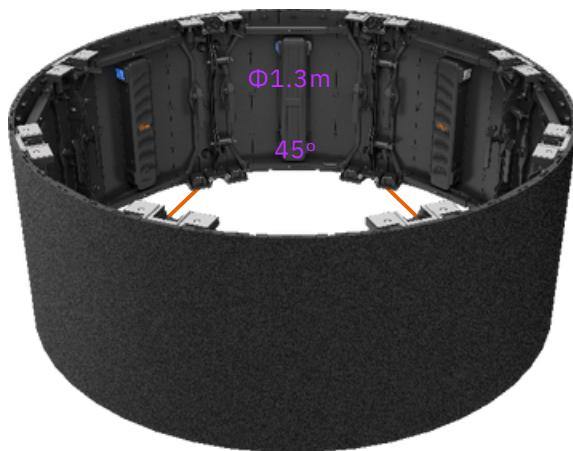

1.9mm
2.6mm
2.9mm

<7kg

3840Hz

Anti-
Collision
Plate

Patent

02


One-handed Adjustment

Advanced mechanical conduction design enables fast operation with only one hand.



Rotate the handle to bend the screen

Reset the handle to lock the screen

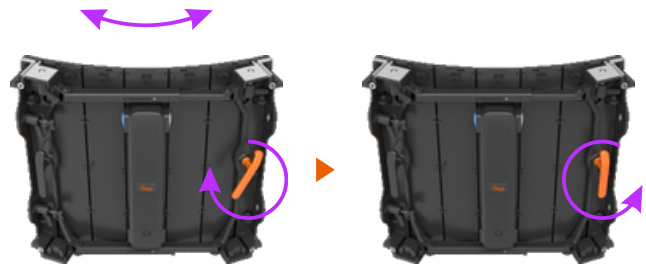


Rotate the handle to bend the screen

Reset the handle to lock the screen

03

Detachable Module

Fully detachable module, control box, and curve locking mechanism for easy maintenance.

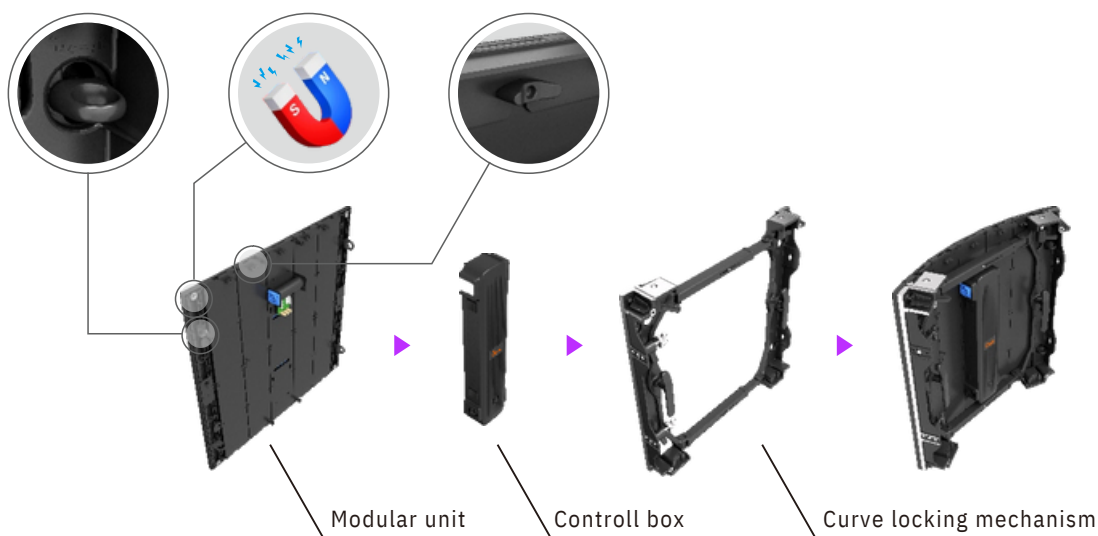

Modular unit

Control box

Curve locking mechanism

04

Hot Plugging


- High-end rental application.
- Quick maintenance without turning off the power



05

Quick Lock System

One-key fast assembling/disassembling

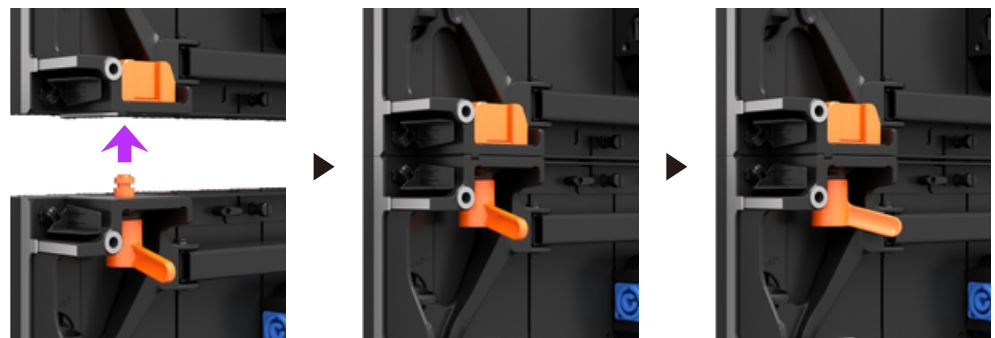


Aim

Fasten

Lock

06

Hanging System

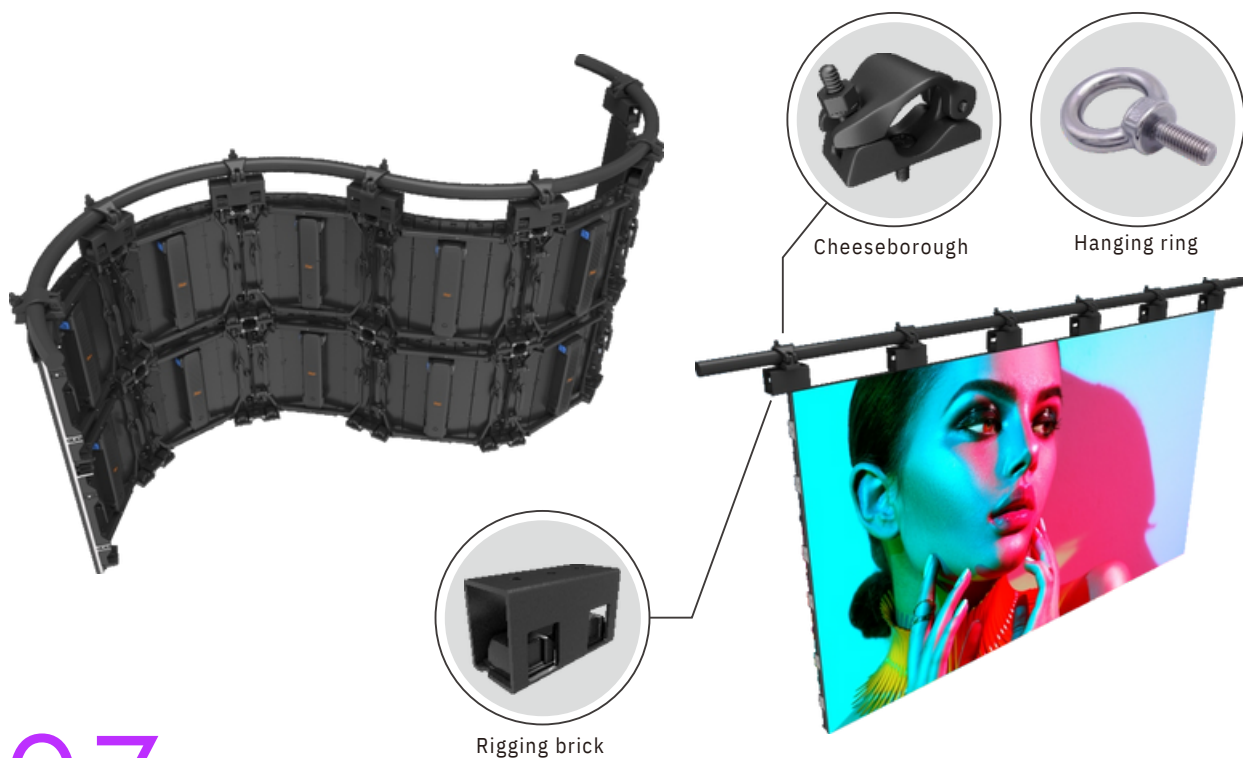


07

Ground Stacking System



08

Specifications

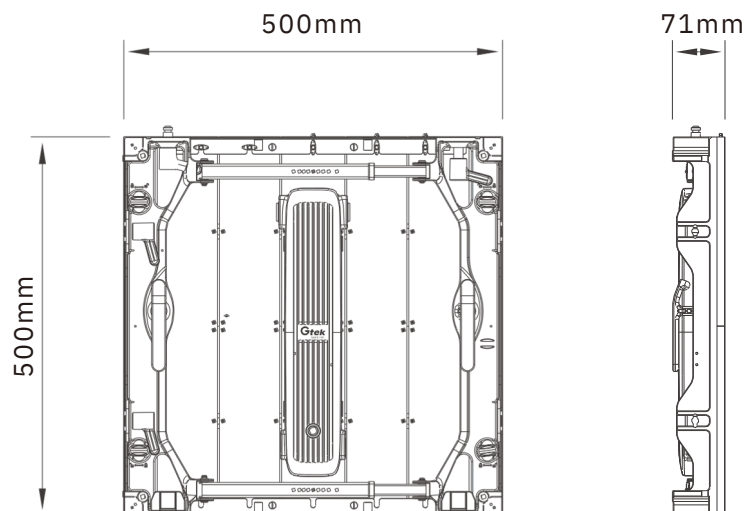

Product Name		InnoPad	
Product model	C1.9TCC2.6TC		C2.9TC
Pixel pitch	1.9mm2.6mm		2.9mm
Pixel density/m	262144147456		112896
Brightness	800nit 1000nit		1000nit <
Weight	<7Kg/tile (15.4LB/tile)	<7Kg/tile(15.4LB/tile)	7Kg/tile(15.4LB/tile)
Module size	500*500mm		
Panel size	500*500*71mm (19.69*19.69*2.80in)		
Ingress protection	IP30		
LED type	SMD		
Viewing angle	160 /160		
Processing depth	16bit		
Contrast ratio	10000:1		
Date refresh rate	3840Hz		
Power consumption (Max/Avg.)	380/120W/m		

※LCD indicator screen is optional, please refer to the actual shipment inspection report.