



**STREET CO'**  
DISPLAY SOLUTION EXPERT  
WWW.STREETCOMMUNICATION.COM

RENTAL

# Unano —SERIES—

## Create Value, Continuously



Light Weight



Low Loss



Multiple Scenarios




Mobile Control




### FEATURES

- Ultra lightweight –die-castmagnesiumdesign,weighsonly 6.3kg
- Automaticclockdesign–enablesoneengineertofinishinstallation, disassemblyandmaintenance
- Brilliant visual performance – DDC (Dual Drive Configuration) Technology & HDR Technology
- Multiple scenario applications – high precision curving & creative display
- Mobile control solution, 4K in hand – smart phone could connect the sendingcardorthe videoprocessordirectlywithout a computer


### APPLICATIONS

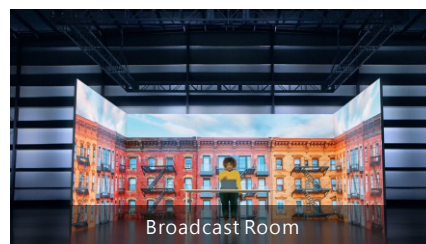


Broadcast Room

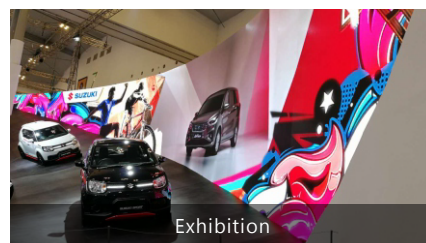

Exhibition

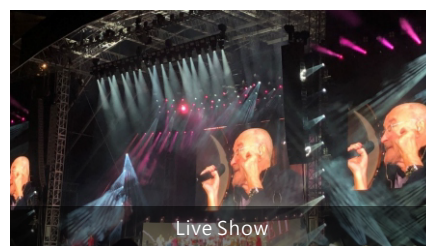

Live Show

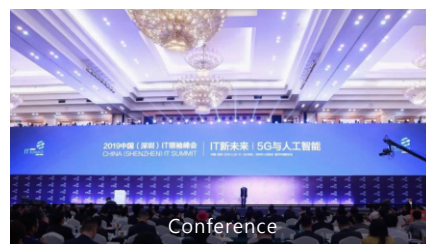

Conference



**STREET CO'**  
DISPLAY SOLUTION EXPERT

[www.streetcommunication.com](http://www.streetcommunication.com)

## SPECIFICATIONS

| Parameter                       | Value                          |                                |
|---------------------------------|--------------------------------|--------------------------------|
| Model                           | UpadIV2                        | UpadIV2.9                      |
| Pixel Pitch                     | 2.6mm                          | 2.9mm                          |
| Environment                     | Indoor                         | Indoor                         |
| LED Type                        | 3-in-1 Black SMD               | 3-in-1 Black SMD               |
| Brightness                      | 1,000 cd/m <sup>2</sup>        | 800 cd/m <sup>2</sup>          |
| Pixel Density                   | 147,456 pix els/m <sup>2</sup> | 112,896 pix els/m <sup>2</sup> |
| Module Size (WxH)               | 250mm x 250mm                  | 250mm x 250mm                  |
| Panel Size (WxHxD)              | 500mm x 500mm x 70.1mm         | 500mm x 500mm x 70.1mm         |
| Panel Resolution                | 192 x 192 dots                 | 168 x 168 dots                 |
| Panel Weight                    | 6.3 kg                         | 6.3 kg                         |
| Material                        | Die-cast Magnesium             | Die-cast Magnesium             |
| Ingress Protection              | IP30                           | IP30                           |
| Operating Temperature/Humidity  | -10°C to 45°C/10% - 80% RH     | -10°C to 45°C/10% - 80% RH     |
| Maintenance                     | Rear                           | Rear                           |
| Curve (Convex - Concave)        | -5° to 10°(optional)           | -5° to 10°(optional)           |
| Viewing Angle (H/V)             | 140°/120°                      | 140°/120°                      |
| Contrast Ratio                  | 3,000:1                        | 3,000:1                        |
| Input Power/Panel (Max.)        | 120 W                          | 120 W                          |
| Input Power/Panel (Ave.)        | 40 W                           | 40 W                           |
| Refresh Rate                    | 3,840 Hz                       | 3,840 Hz                       |
| Input Voltage                   | 100 - 240 VAC                  | 100 - 240 VAC                  |
| Input Power Frequency           | 50 - 60 Hz                     | 50 - 60 Hz                     |
| Standard Mounting Configuration | Hanging, Stacking              | Hanging, Stacking              |
| Certification                   | TUV-CE/UL/CB/FCC/IC/RoHS       | TUV-CE/UL/CB/FCC/IC/RoHS       |

Note: Specifications are for reference only and are subject to change without notice

## DIMENDIONS

