


F21 Tunable White LED Linear Flex

F21-24V-2835-120-DW

Specification

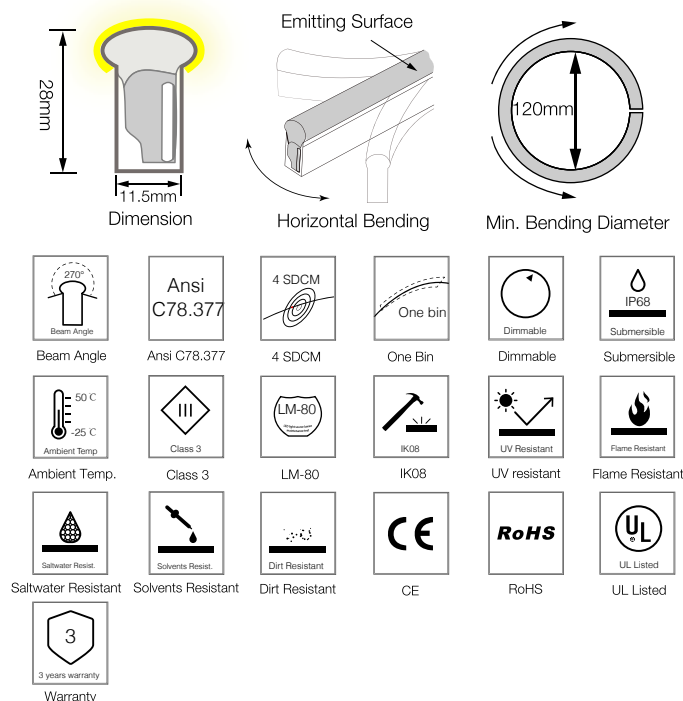


Technical Parameters

Electrical	
Input Voltage	24V DC
Power Consumption	15W/m
Physical	
LED Count	120 LEDs/m
Cutting Unit	12 LEDs
Cutting Unit Length	100mm
Minimum Bend Diameter	80mm
Output	
LED Light	Epistar SMD LED 2835
CRI	>80, >90
Max Run Length*	
Single Feed	10M
Double Feed	20M
Beam Angle	270°
Lumen Maintenance	70,000 Hours L70 @ 25°C 50,000 Hours L70 @ 50°C
Temperature Ranges	
Installation	0°C to 50°C
Operating	-25°C to 50°C
Dependability	
Warranty	3 Years Warranty
IP Rating	IP68 Wet location submersible <2m


Optional Color Combinations Lumen Output

	2200K+5700K	223lm/m+248lm/m
	2700K+5700K	191lm/m+186lm/m
	3000K+5700K	201lm/m+215lm/m

Illuminance Distribution

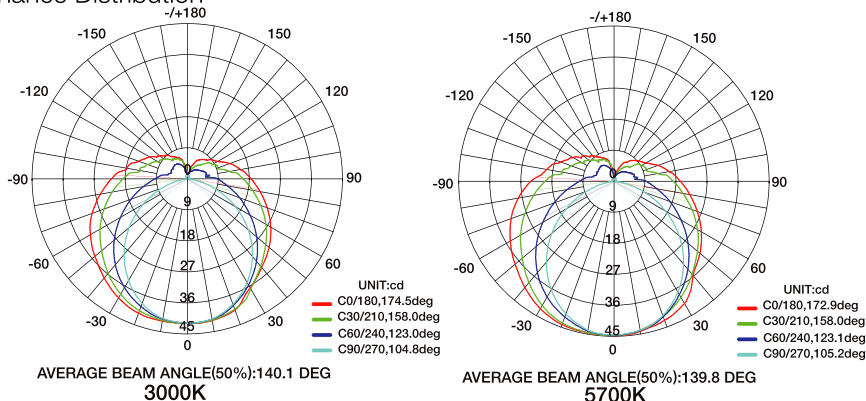

White Color Charts

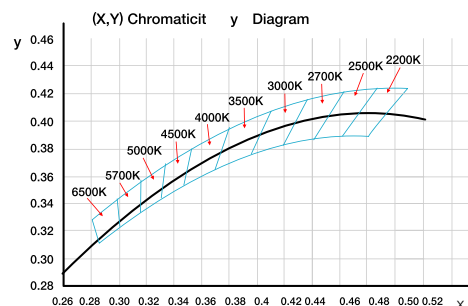

F21 Tunable White LED Linear Flex

Connection

FG $\frac{1}{2}$ (Green)
AC/L(Brown)
AC/N(Blue)

① Regular Connection

