
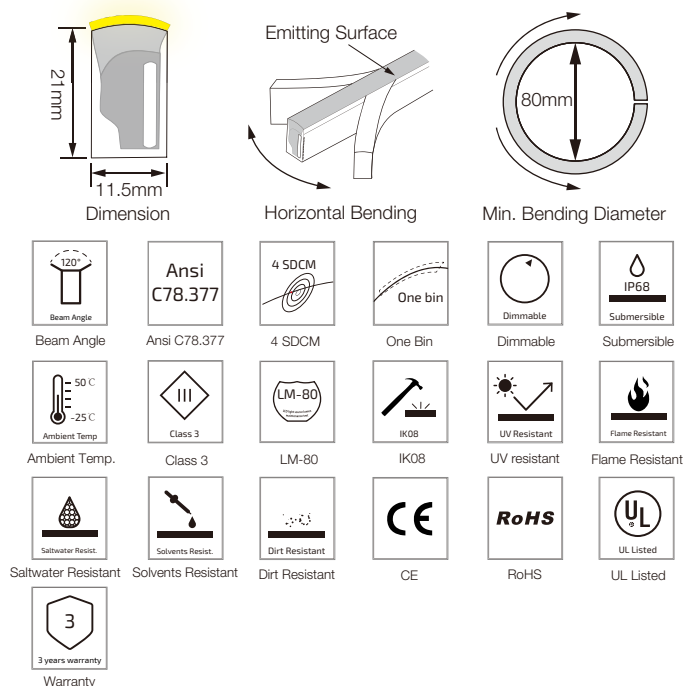



F15 Mono Color LED Linear Flex

F15-24V-5050-60-2200K-6500K


Specification

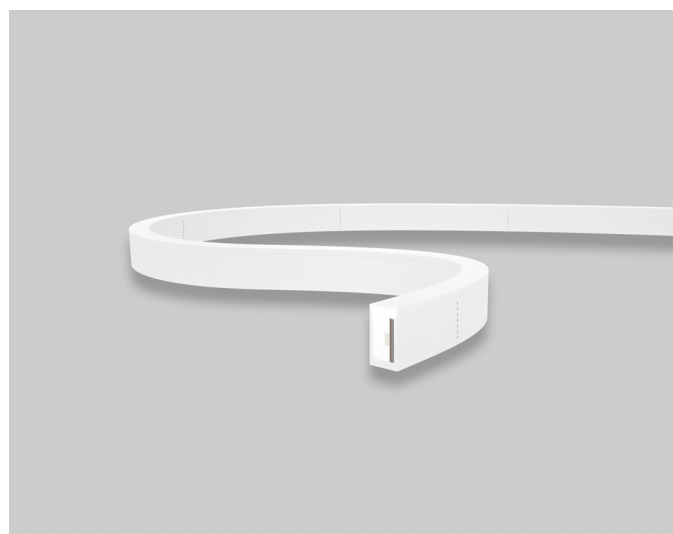


Technical Parameters

Electrical		Optional Color		Lumen Output
Input Voltage	24V DC		2200K(2238±102K)	280lm/m
Power Consumption	12W/m		2700K(2725±145K)	340lm/m
Physical			3000K(3045±175K)	340lm/m
LED Count	60 LEDs/m		3500K(3465±245K)	340lm/m
Cutting Unit	6 LEDs		4000K(3985±275K)	360lm/m
Cutting Unit Length	100mm		4500K(4503±243K)	360lm/m
Output			5000K(5029±283K)	370lm/m
LED Light	Epistar SMD LED 5050		6500K(6532±510K)	320lm/m
CRI	>80, >90		Green(520-530nm)	253lm/m
Max Run Length*			Blue (520-530nm)	29lm/m
Single Feed	10M		Lemon Yellow(520-530nm)	430lm/m
Double Feed	20M		Pink(630-645nm)	92lm/m
Beam Angle	120°			
Temperature Ranges				
Installation	0°C to 50°C			
Operating	-25°C to 50°C			
Dependability				
Warranty	3 Years Warranty			
IP Rating	IP68 Wet location submersible <2m			

Illuminance Distribution

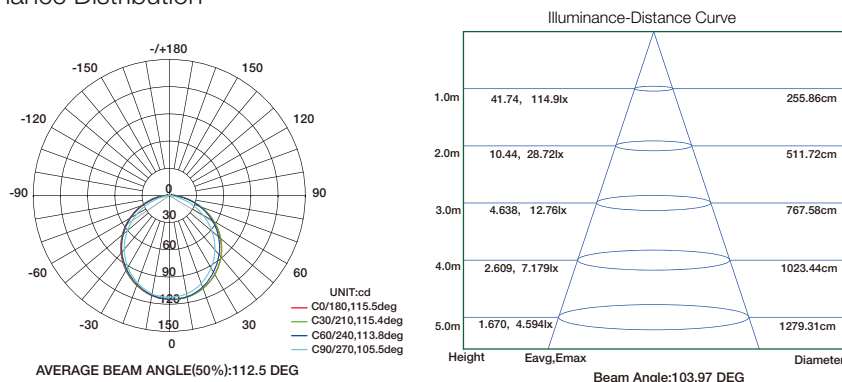

White Color Charts

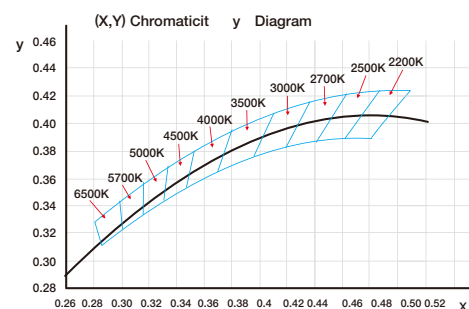

F15 Mono Color LED Linear Flex

Connection

