



F15 Mono Color LED Linear Flex

F15-24V-5050-72-2200K-6500K


Specification

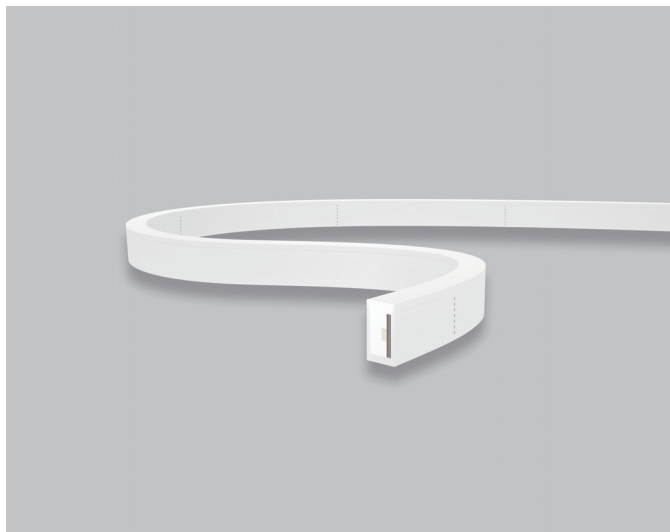


Technical Parameters

Electrical		Optional Color		Lumen Output
Input Voltage	24V DC		2200K(2238±102K)	273lm/m
Power Consumption	13W/m		2700K(2725±145K)	395lm/m
Physical			3000K(3045±175K)	364lm/m
LED Count	72 LEDs/m		3500K(3465±245K)	416lm/m
Cutting Unit	6 LEDs		4000K(3985±275K)	414lm/m
Cutting Unit Length	83.3mm		4500K(4503±243K)	343lm/m
Minimum Bend Diameter	80mm		5000K(5029±283K)	343lm/m
Output			6500K(6532±510K)	342lm/m
LED Light	Epistar SMD LED 5050		Green(520-530nm)	366lm/m
CRI	>80, >90		Blue (520-530nm)	34lm/m
Max Run Length*			Lemon Yellow(520-530nm)	300lm/m
Single Feed	8M		Pink(630-645nm)	180lm/m
Double Feed	16M			
Beam Angle	120°			
Temperature Ranges				
Installation	0°C to 50°C			
Operating	-25°C to 50°C			
Dependability				
Warranty	3 Years Warranty			
IP Rating	IP68 Wet location submersible <2m			

Illuminance Distribution

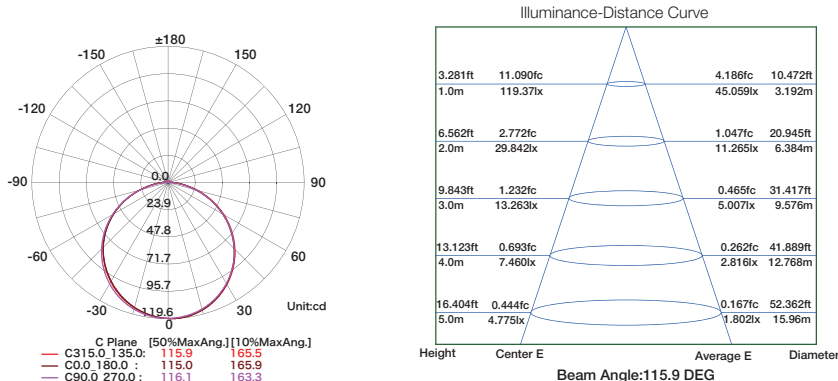

White Color Charts

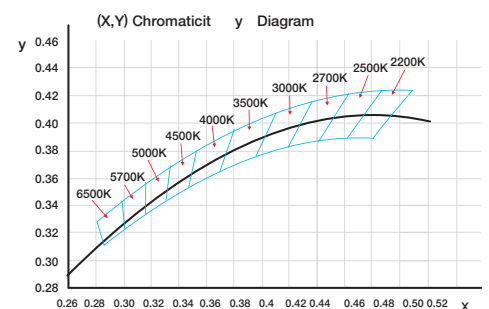

F15 Mono Color LED Linear Flex

Connection

