

SF21 Multi Color RGBW Silicone LED Linear Flex


SF21-24V-5050-72-RGBW

Specification









Min. Bending Diameter





LM-80 LM-80

IK08

Dirt Resistant

Anti-Yellowing

 $\langle || \rangle$



Saltwater Resistant Solvents Resistant





CE RoHS

RoHS





Warranty

Technical Parameters

Electrical	
Input Voltage	24V DC
Power Consumption	17W/m
Physical	
LED Count	72 LEDs/m
Cutting Unit	6 LEDs
Cutting Unit Length	83.3mm
Minimum Bend Diameter	80mm
Output	
LED Light	Epistar SMD LED 5050
Color	RGBW(2 00K/3000K/4000) 5000K)
Max Run Length*	
Single Feed	8M
Double Feed	16M
Beam Angle	270°
Lumen Maintenance	70,000 Hours L70 @ 25°C 50,000 Hours L70 @ 50°C
Temperature Ranges	
Installation	0°C to 50°C
Operating	-40°C to 55°C
Dependability	
Warranty	5 Years Warranty
IP Rating	IP68 Wet location submersible <2m





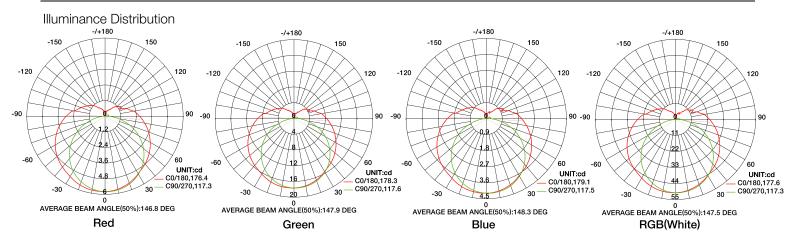

SF21 Multi Color RGBW Silicone LED Linear Flex

