


F15-24V-5050-60-2200K-6500K

Specification

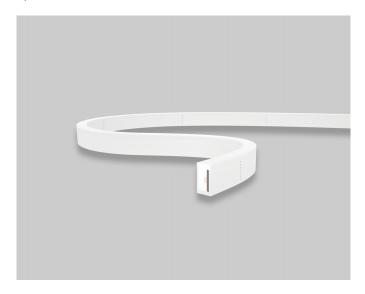



Emitting Surface



Horizontal Bending Min. Bending Diameter

4 SDCM *(*





Ansi C78.377 4 SDCM

(LM-80)

LM-80

Dirt Resistant

Ansi

C78.377

(

Class 3

Solvents Resistant

One Bin

Dimmable

Submersible

 ϵ



UV Resistant

UL Listed

RoHS

RoHS

(اپار)



Beam Angle


50°C -25°C

Ambient Temp


٨


Technical Parameters


Electrical	
Input Voltage	24V DC
Power Consumption	12W/m
Physical	
LED Count	60 LEDs/m
Cutting Unit	6 LEDs
Cutting Unit Length	100mm
Minimum Bend Diameter	80mm
Output	
LED Light	Epistar SMD LED 5050
CRI	>80, >90
Max Run Length*	
Single Feed	10M
Double Feed	20M
Beam Angle	120°
Lumen Maintenance	70,000 Hours L70 @ 25°C
	50,000 Hours L70 @ 50°C
Temperature Ranges	
Installation	0°C to 50°C
Operating	-25°C to 50°C
Dependability	
Warranty	3 Years Warranty
IP Rating	IP68 Wet location submersible <2m

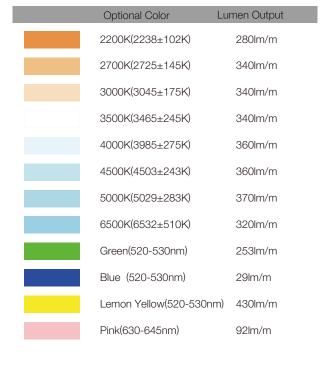

Illuminance Distribution





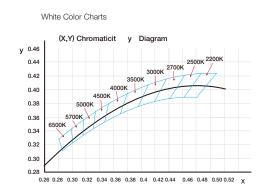

F15 Mono Color LED Linear Flex

