


SF15 Multi Color RGB Silicone LED Linear Flex

SF15-24V-5050-60-RGB


Specification

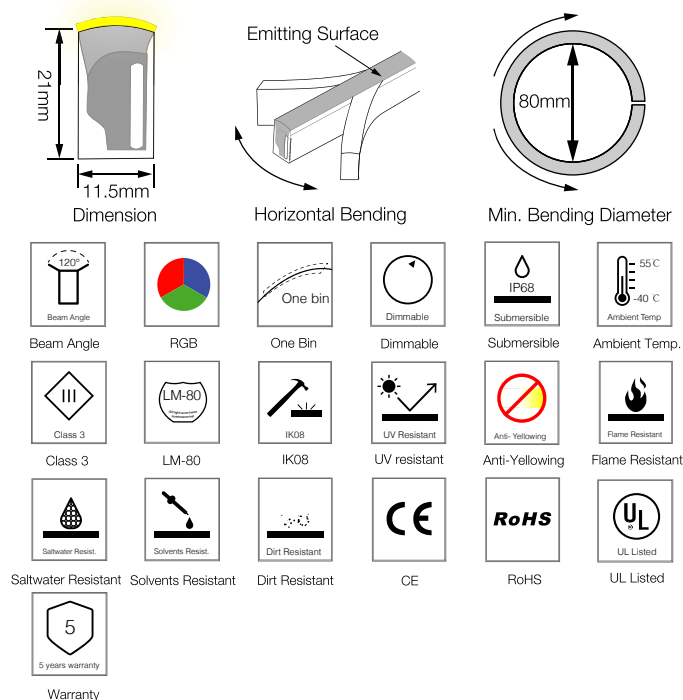

Technical Parameters

Electrical		Emitting Color		Lumen Output	
Input Voltage	24V DC	   	Red	35lm/m	
Power Consumption	12W/m		Green	100lm/m	
Physical			Blue	24lm/m	
LED Count	60 LEDs/m		RGB(White)	170lm/m	
Cutting Unit	6 LEDs				
Cutting Unit Length	100mm				
Minimum Bend Diameter	80mm				
Output					
LED Light	Epistar SMD LED 5050				
Color	RGB				
Max Run Length*					
Single Feed	10M				
Double Feed	20M				
Beam Angle	120°				
Lumen Maintenance	70,000 Hours L70 @ 25°C 50,000 Hours L70 @ 50°C				
Temperature Ranges					
Installation	0°C to 50°C				
Operating	-40°C to 55°C				
Dependability					
Warranty	5 Years Warranty				
IP Rating	IP68 Wet location submersible <2m				

Illuminance Distribution

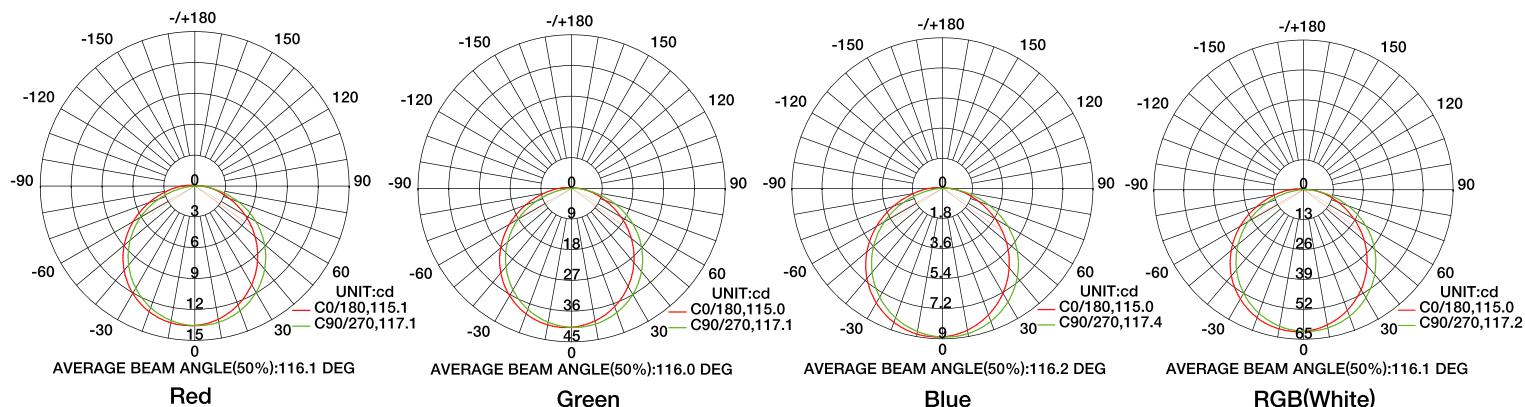

SF15 Multi Color RGB Silicone LED Linear Flex

Connection

