
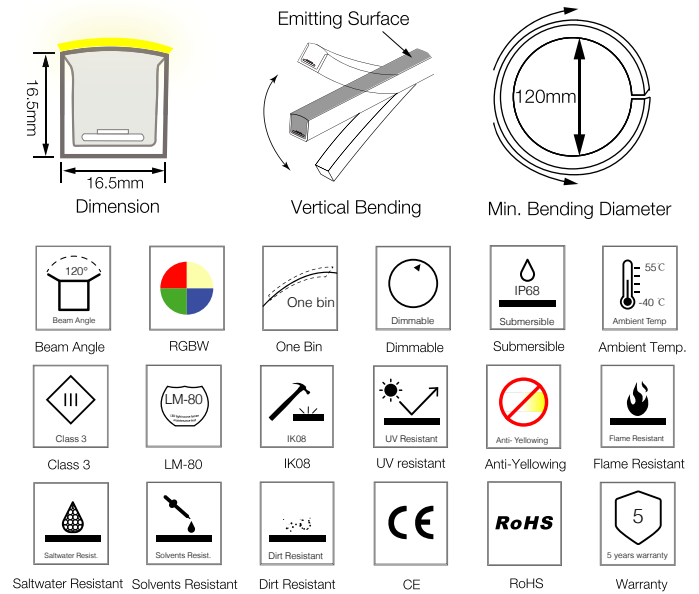


SF16 Multi Color RGBW Silicone LED Linear Flex

SF16-24V-5050-72-RGBW


Specification

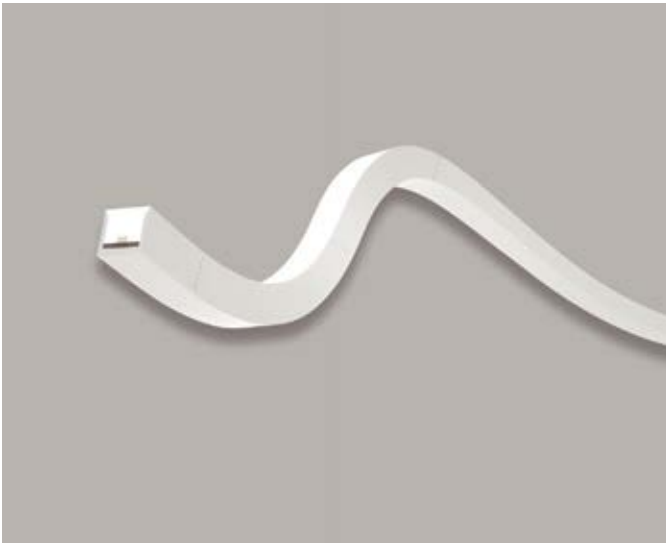


Technical Parameters

Electrical	
Input Voltage	24V DC
Power Consumption	17W/m
Physical	
LED Count	72 LEDs/m
Cutting Unit	6 LEDs
Cutting Unit Length	83.3mm
Minimum Bend Diameter	120mm
Output	
LED Light	Epistar SMD LED 5050
Color	RGBW(2700/3000/4000K/5000K)
Max Run Length*	
Single Feed	8M
Double Feed	16M
Beam Angle	120°
Lumen Maintenance	70,000 Hours L70 @ 25°C 50,000 Hours L70 @ 50°C
Temperature Ranges	
Installation	0°C to 50°C
Operating	-40°C to 55°C
Dependability	
Warranty	5 Years Warranty
IP Rating	IP68 Wet location submersible <2m

Emitting Color		Lumen Output
	Red	13lm/m
	Green	150lm/m
	Blue	34lm/m
	RGB(White)	480lm/m
	3000K	250lm/m

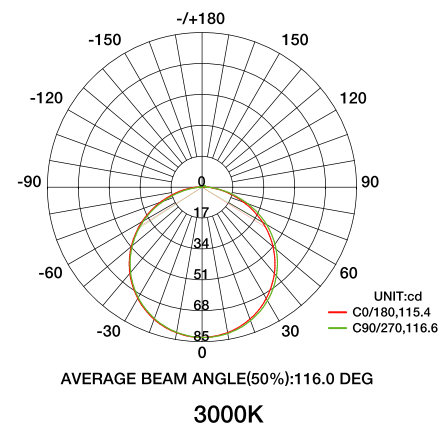

Illuminance Distribution

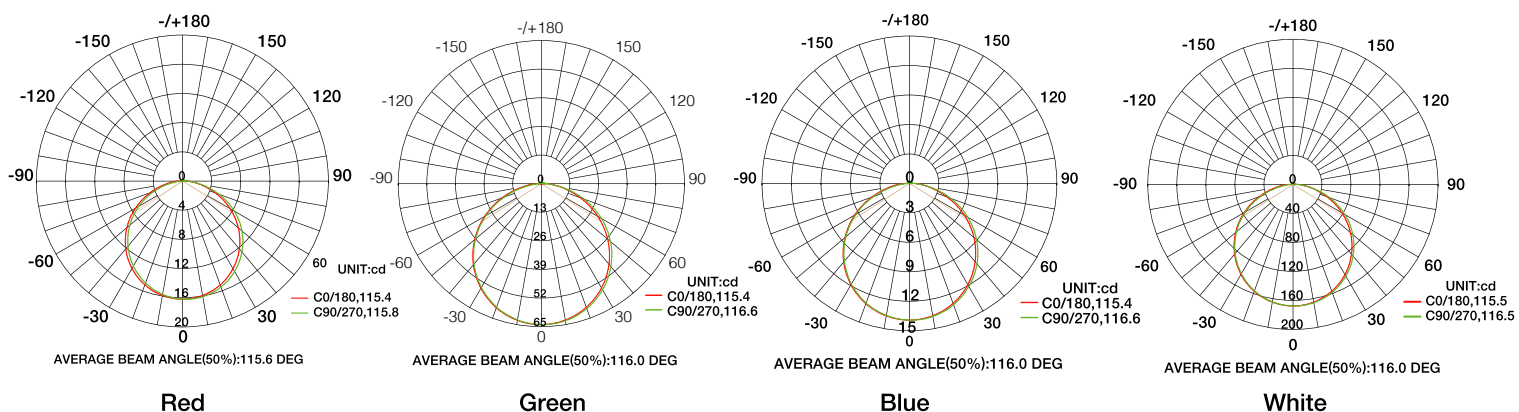

SF16 Multi Color RGBW Silicone LED Linear Flex

Connection

