



STREET CO'
DISPLAY SOLUTION EXPERT
www.streetcommunication.com




OUTDOOR RENTAL- IP65 TRANSPARENT LED SCREEN

Outdoor Rental Transparent LED Screen

Product Introduction


E-LIKE outdoor rental transparent screen is a transparent screen product that is easy to disassemble and assemble quickly. In order to meet the rental market's demand for portability and all-weather operation, it uses a CNC precision-machined die-cast aluminum box, an IP65 waterproof design, and the module is potted and encapsulated. , both waterproof and bump-proof. Each cabinet is equipped with a horizontal arc-shaped fixed lock, which can be folded up to 15° to create a curved screen. E-LIKE transparent screen window ventilation module has low wind resistance and higher safety factor. It is the first choice product for rental display screens.

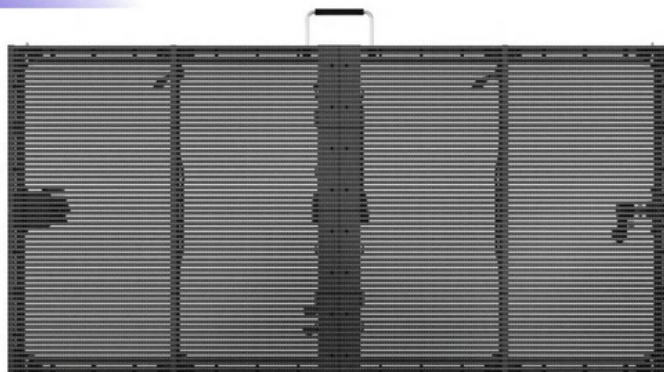


Product Type




15° Angle Arc Lock Rental Cabinet

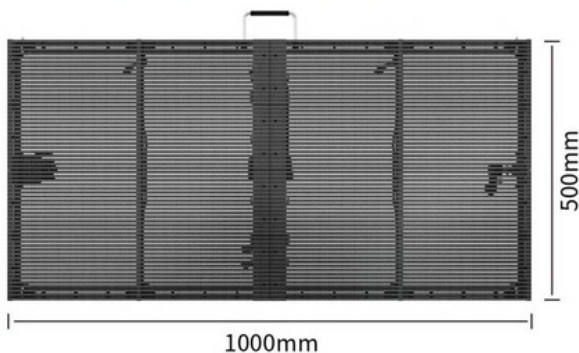


Rental cabinet without curved lock

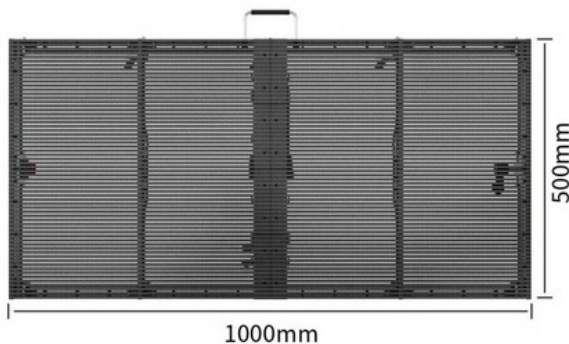

10° Angle Arc Lock Rental Cabinet

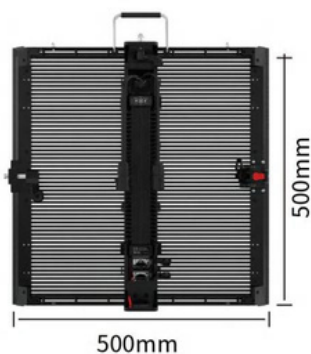

Product Detail

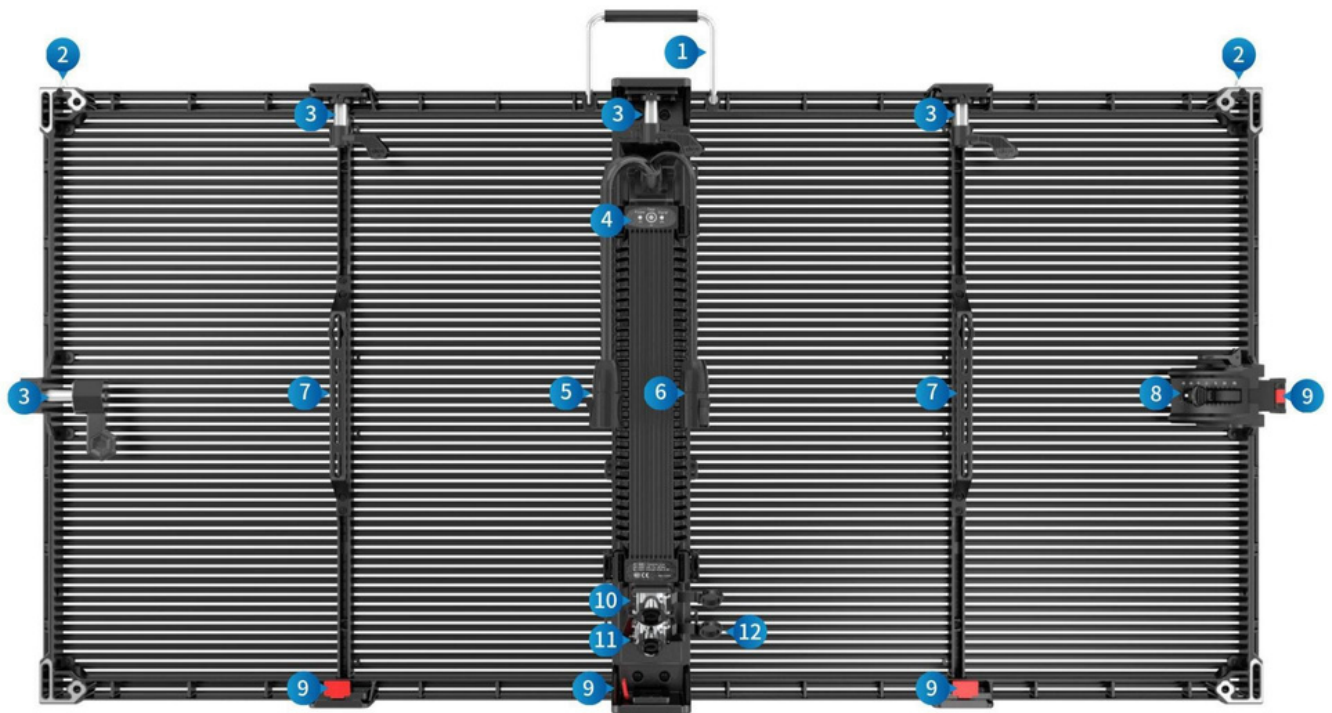

- | | | | |
|-------------------|--------------------|-------------------|--------------------|
| 1 Handle | 2 Positioning pin | 3 Connection lock | 4 Power box |
| 5 Power cord plug | 6 Signal line plug | 7 Cabinet handle | 8 Arc lock |
| 9 Fast Lock | 10 Power socket | 11 Signal socket | 12 Waterproof plug |



Power & signal sync



Fast lock connection



Air socket



Power box fast lock




Status Indicator & test button




Glue waterproof screen module


Product Features

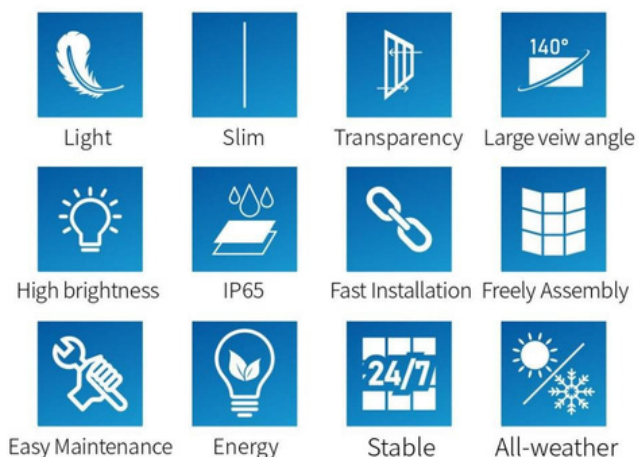


CNC precision machining cabinet

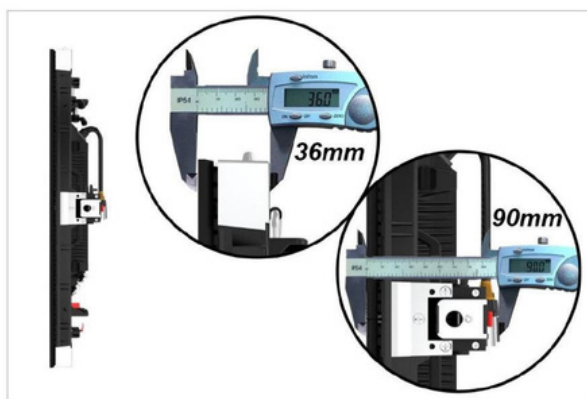


Super slim cabinet

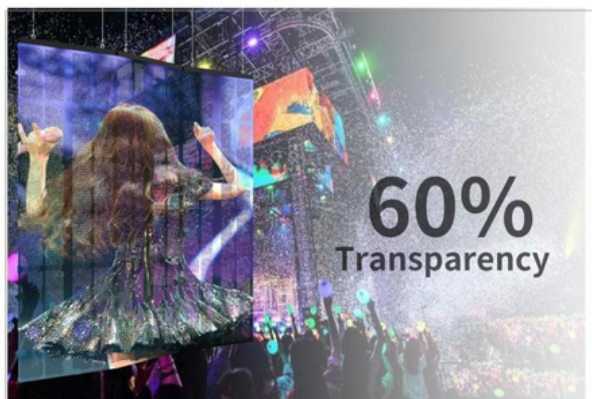


Good light transmittance

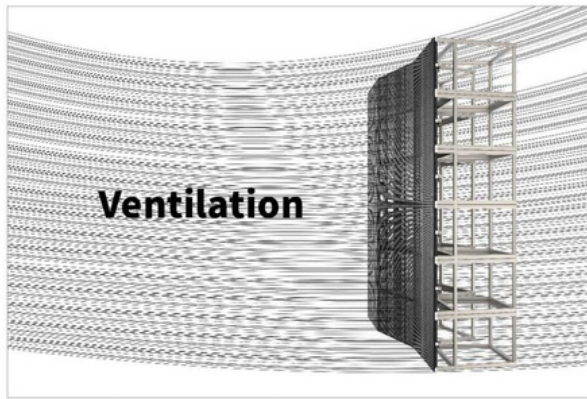

Less wind resistance and safer

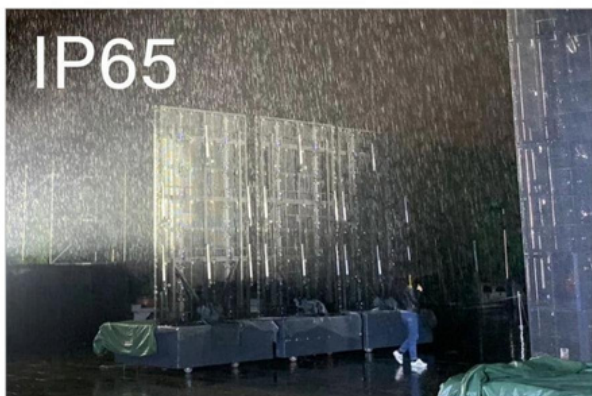


IP65 waterproof, no fear of weather changes

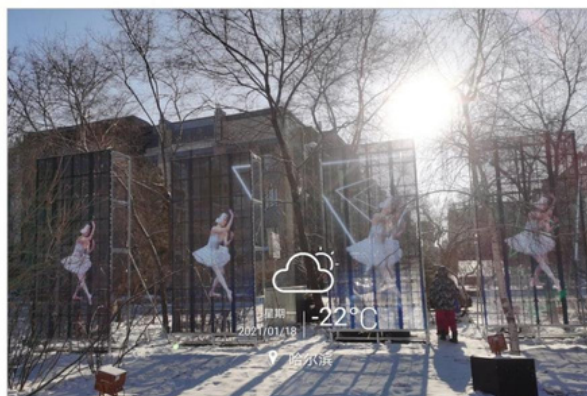

High and low temperature resistance

Screen Style


15° angle-cut arc lock cabinet combination method

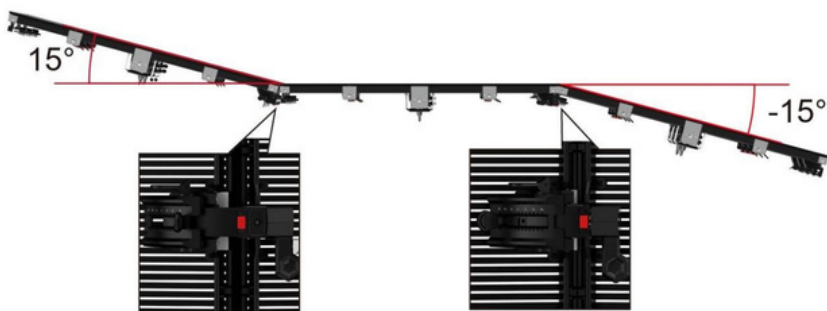

The lock can be adjusted according to the scale, achieve 15° internal arc of adjacent cabinets


The lock can be adjusted according to the scale achieve -15° external arc of adjacent cabinets

cabinet size: 1000x500 (mm)

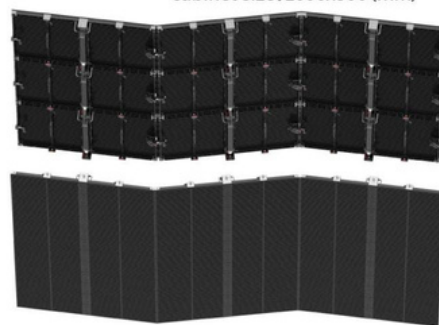


Cabinet with curved locking angle of 15°, can be customized according to needs combined to form a curved screen with a wider viewing angle


45° cut angle cabinet combination method

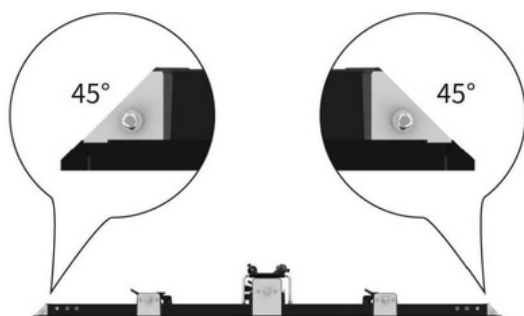

45° angle cut on the cabinet

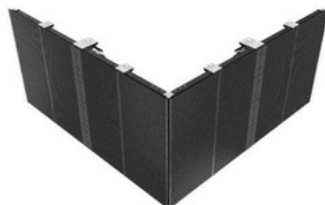


Combined into a 90° right-angled screen

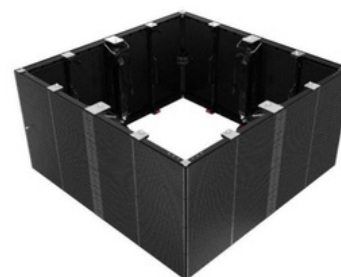


Combined into square column screen

10° arc lock 45° angle cut cabinet combination method

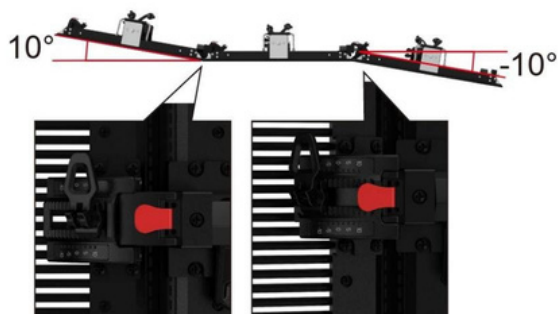

45° angle cut on the cabinet

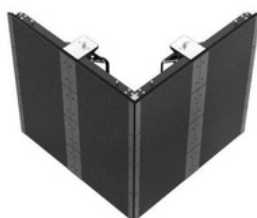

Combined into a 90° right-angled screen



Combined into square column screen

Different cabinet combinations



25° external arc combined external arc screen




90° right-angle screen with cut-angle




Combined into square column screen

Installation Style

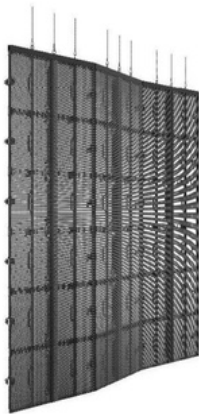


Suspended beam installation
(Maximum height 10m)

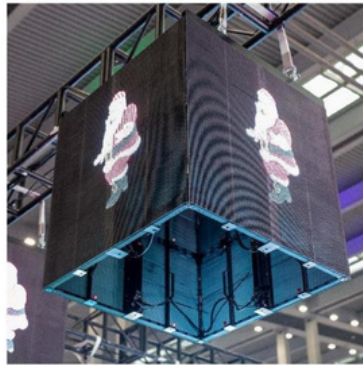

Hoist the screen on the truss with sling straps


Suspender beam installation diagram

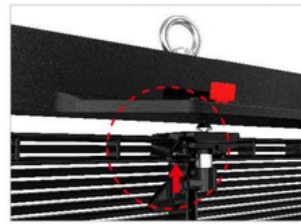

Insert the fast lock into the lock hole of the hanging beam the bayonet will lock automatically



Turn the fast lock to the right
Fastening connection

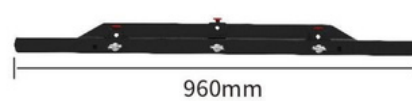

960mm



3.5kg

Thickened aluminum alloy profile
suspension beam



Stacking installation
(Maximum height 10m)



The s are stacked on the floor.
The viewing angles of the screen
can be freely combined as needed



*Note: The base mounting bracket can be
customized according to needs.

Easy Maintenance







Modular design easy to replace screen modules



Quickly lock the power box to facilitate
replacement of receiving cards

Parameters

Model		JL3-7	JL5-10	JL10	JL15.6
Module	Module image				
	Pixel Pitch(mm)	W:3.9 H:7.8	W:5.2 H:10.4	W:10.4 H:10.4	W:15.6 H:15.6
	Transparency	55%	65%	65%	80%
	Pixel (dot/m ²)	32768	18432	9216	4096
	Driver chip	ICN2153PWM	MY9866	MY9866	ICN2038S
	Scanning method	1/8	1/4	1/2	Static
	Refresh rate(hz)	5120	3840	3840	30000
	Brightness(cd/m ²)	≥4500	≥4500	≥4500	≥4500
	LED specification	SMD1921	SMD1921	SMD2727	SMD2727
	Best viewing distance/m	4	6	10	15
	Maximum viewing angle	140°			
	LED lamp life	≥100,000 hours			
	LED pixel composition	RGB 3 in 1			
Cabinet	Cabinet connection	Fast lock			
	Cabinet material	Die cast aluminum			
	Maintenance	Front / Rear			
	Protection grade	IP65			
	Cabinet size(mm)	1000*500*80			
	Cabinet weight	15kg/m ²			
Screen	Grayscale level	14bit			
	Color temperature	3000k/12000k Adjustable			
	MTBF	≥ 6500 hours			
	Working temperature	-20~60°C / 20%~90%			
	Storage temperature	-15~55°C / 10%~90%			
	Shadow removal	System standard			
	LED control system	Nova			
	Data connection	WiFi / DVI / HDMI / DP / USB/RJ45network remote control			
	Input voltage	AC100~240V 50/60Hz			
	Maximum Power(W/m ²)	800			
	Average Power(W/m ²)	240			
	Installation method	Hanging (10 cabinets vertically) /base installation/fixed installation			
	Packing	Wooden box or flightcase			

Pagcking & Installation



Flightcase packaging for convenient transportation



Remote guidance installation and debugging services

Project Reference



▲ Outdoor rental transparent screen project in Harbin

Pixel pitch: P3.9-7.8 Total area: 80m²



▲ Outdoor rental transparent screen project in Harbin

Pixel pitch: P3.9-7.8 Total area: 80m²

Project Reference



▲ Outdoor rental project of sunken square in Huadu Lake Park, Guangzhou

Pixel pitch: P10.42 Total area: 120m²



▲ Outdoor rental project of Changchun

Pixel pitch: P3.9-7.8 Total area: 180m²

Project Reference



- ▲ The rental transparent screen project for the opening ceremony of the Chongqing Belt and Road Initiative
Pixel pitch: P10.42 Total area: 150m²



- ▲ Outdoor rental transparent screen project of Wuhan Yellow Crane Tower
Pixel pitch: P5-10 Total area: 90m²