



O-Raster Poster / SERIES (Single-side)
Holographic Invisible
Led Screen



STREET CO'
DISPLAY SOLUTION EXPERT




STREET CO'
DISPLAY SOLUTION EXPERT

www.streetcommunication.com



SPECIFICATION - Hanging Up Type

Pixel Pitch	Horizontal:3.91mm/Vertical: 3.91mm	
Pixel Density	65536dot/ m2	
Visual Transparency	>92%	
LED Type	Light & Driver Integrated	
Mouldle Thickness	1.8mm	
Mouldle Display Size(W*H)	2000mmx2000mm	1000mmx2000mm
Screen Resolution Ratio	512x512pix	256x512pix
Overall Dimensions	2000mmx2190mmx55mm	1000mmx2190mmx55mm
Screen Weight	39kg	20.5kg
Led Control System	Synchronous/Asynchronous	
Brightness	White balance brightness 3000-3500cd/m ² . Automatically adjust and manually adjust according to ambient brightness	
Viewing Angle	Horizontal 160, Vertical 140	
Resumable Transmission	Supported	
Average Lifespan	> 100000 hours	
Grey Scale	≥16(bit)	
Drive Mode	Static Driving	
Power Supply Requirements	AC100~240V 50/60 Hz	
Max. Power Consumption	1300-1400W/m ²	
Ave.Power Consumption	390-420W/m ²	
Working Temperature	-20°C~+50°C	
Working Humidity	20% RH ~ 85% RH, no condensation	

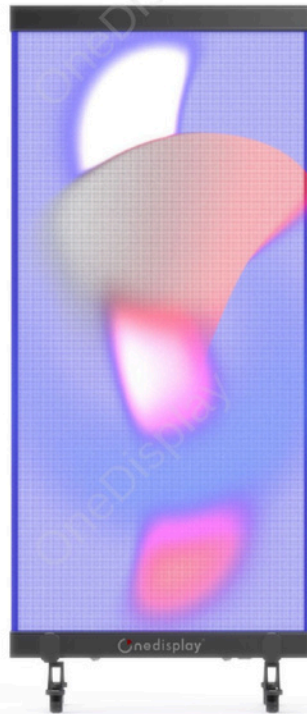


SPECIFICATION - Floor Standing Type

Pixel Pitch	Horizontal:3.91mm/Vertical: 3.91mm	
Pixel Density	65536dot/ m2	
Visual Transparency	>92%	
LED Type	Light & Driver Integrated	
Moudle Thickness	1.8mm	
Moudle Display Size(W*H)	2000mmx2000mm	1000mmx2000mm
Screen Resolution Ratio	512x512pix	256x512pix
Overall Dimensions	2000mmx2400mmx500mm	1000mmx2415mmx500mm
Screen Weight	45kg	24kg
Led Control System	Synchronous/Asynchronous	
Brightness	White balance brightness 3000~3500cd/m ² , Automatically adjust and manually adjust according to ambient brightness	
Viewing Angle	Horizontal 160, Vertical 140	
Resumable Transmission	Supported	
Average Lifespan	> 100000 hours	
Grey Scale	≥16(bit)	
Drive Mode	Static Driving	
Power Supply Requirements	AC100~240V 50/60 Hz	
Max. Power Consumption	1300W/m ²	
Ave.Power Consumption	390W/m ²	
Working Temperature	-20°C~+50°C	
Working Humidity	20% RH ~ 85% RH, no condensation	

Lightweight and Ultra-Transparent

With 3.05mm light transmission holes, 1.8mm module thickness, and 0.5kg single-module weight for the best possible display effect, while maintaining optimal clearance for seamless light transmission.

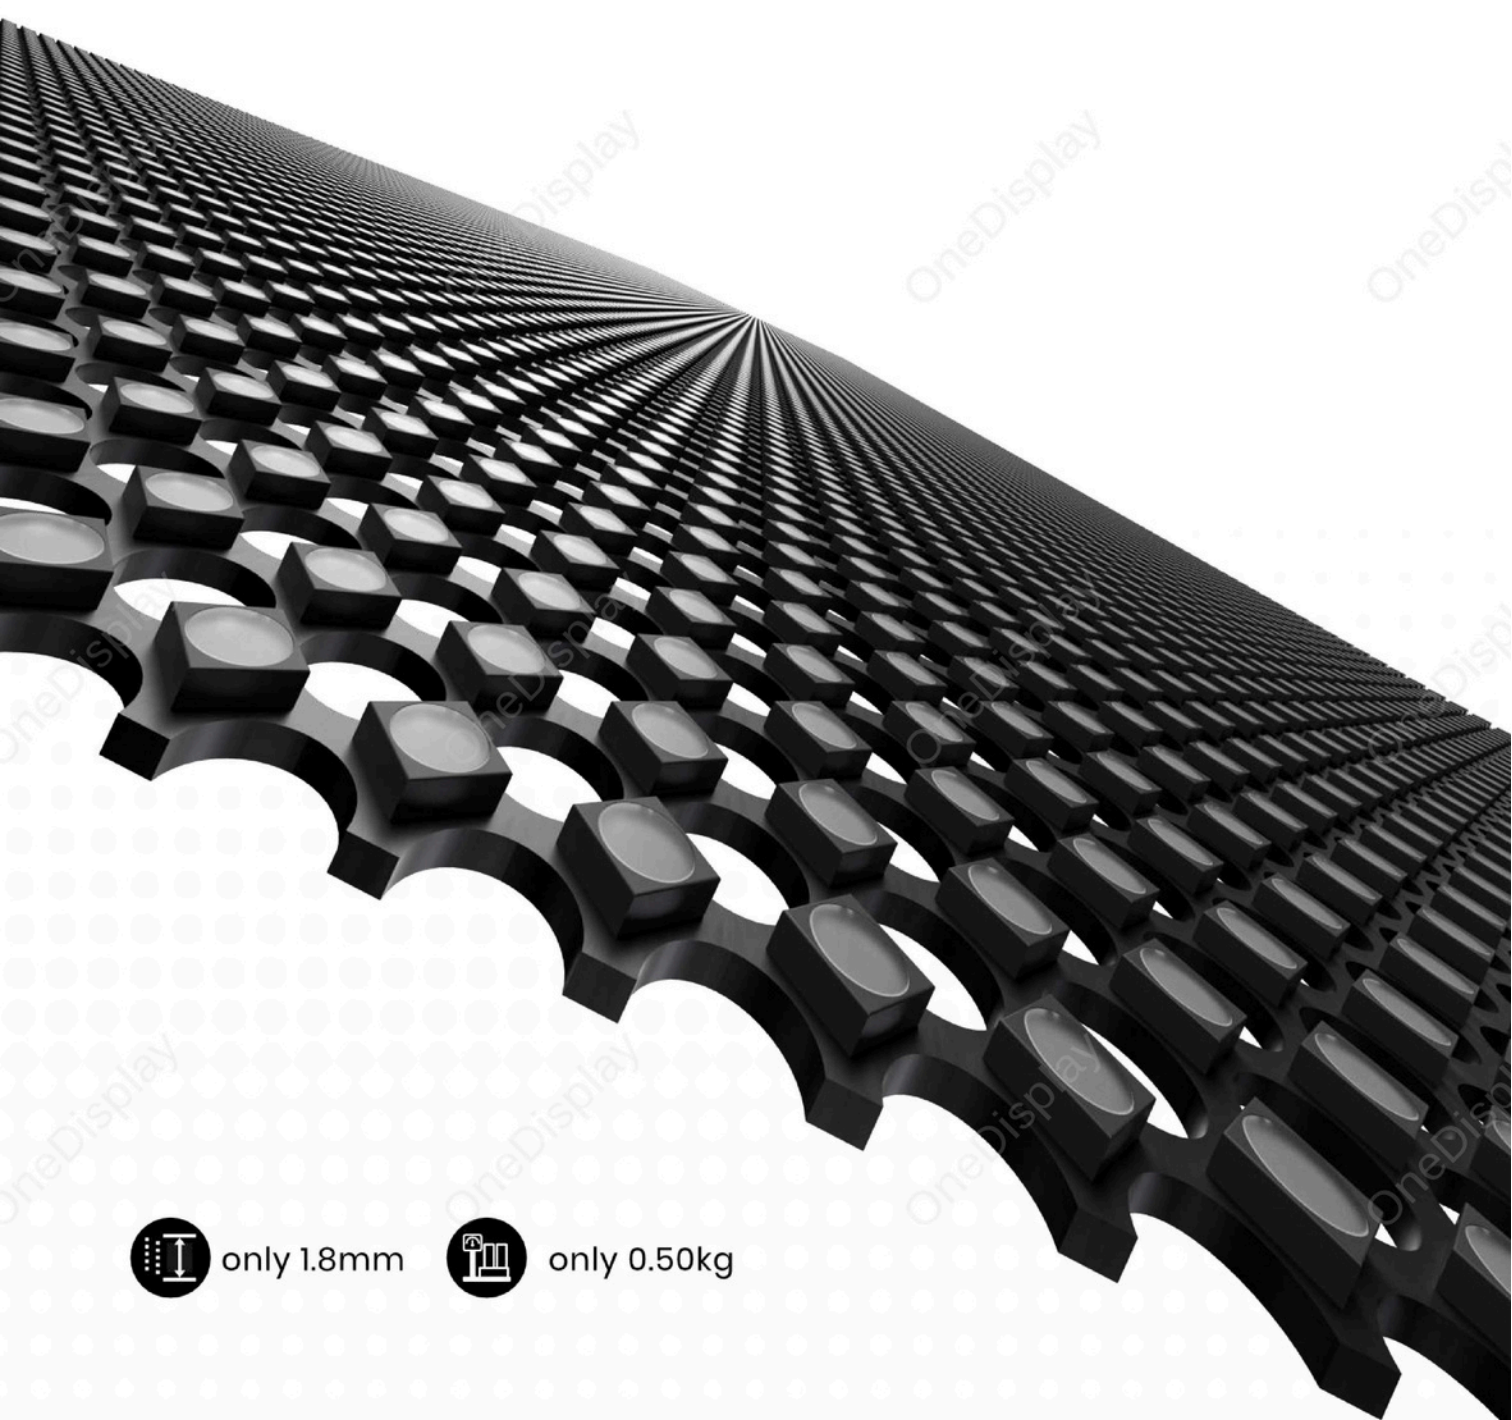

only 1.8mm



only 0.50kg



O-Raster Poster / SERIES



Simple & Robust Structure


Crafted from lightweight, high-strength aluminum, its minimalist aesthetic blends seamlessly into any environment, ensuring it never feels out of place.

- **Ultra-Thin Alloy Frame**
Simple lines and more reliable structure.
- **Simple & Robust Structure**
Combines durability with a sleek, modern design.
- **Ultra-Narrow Power Box**
Making the show window cleaner and tidier.



Plug-and-Play Simplicity

Effortlessly set up and control your screen. Just plug in the power cord, and you're ready to go. Plus, smartphone app lets you upload and manage content on the go.

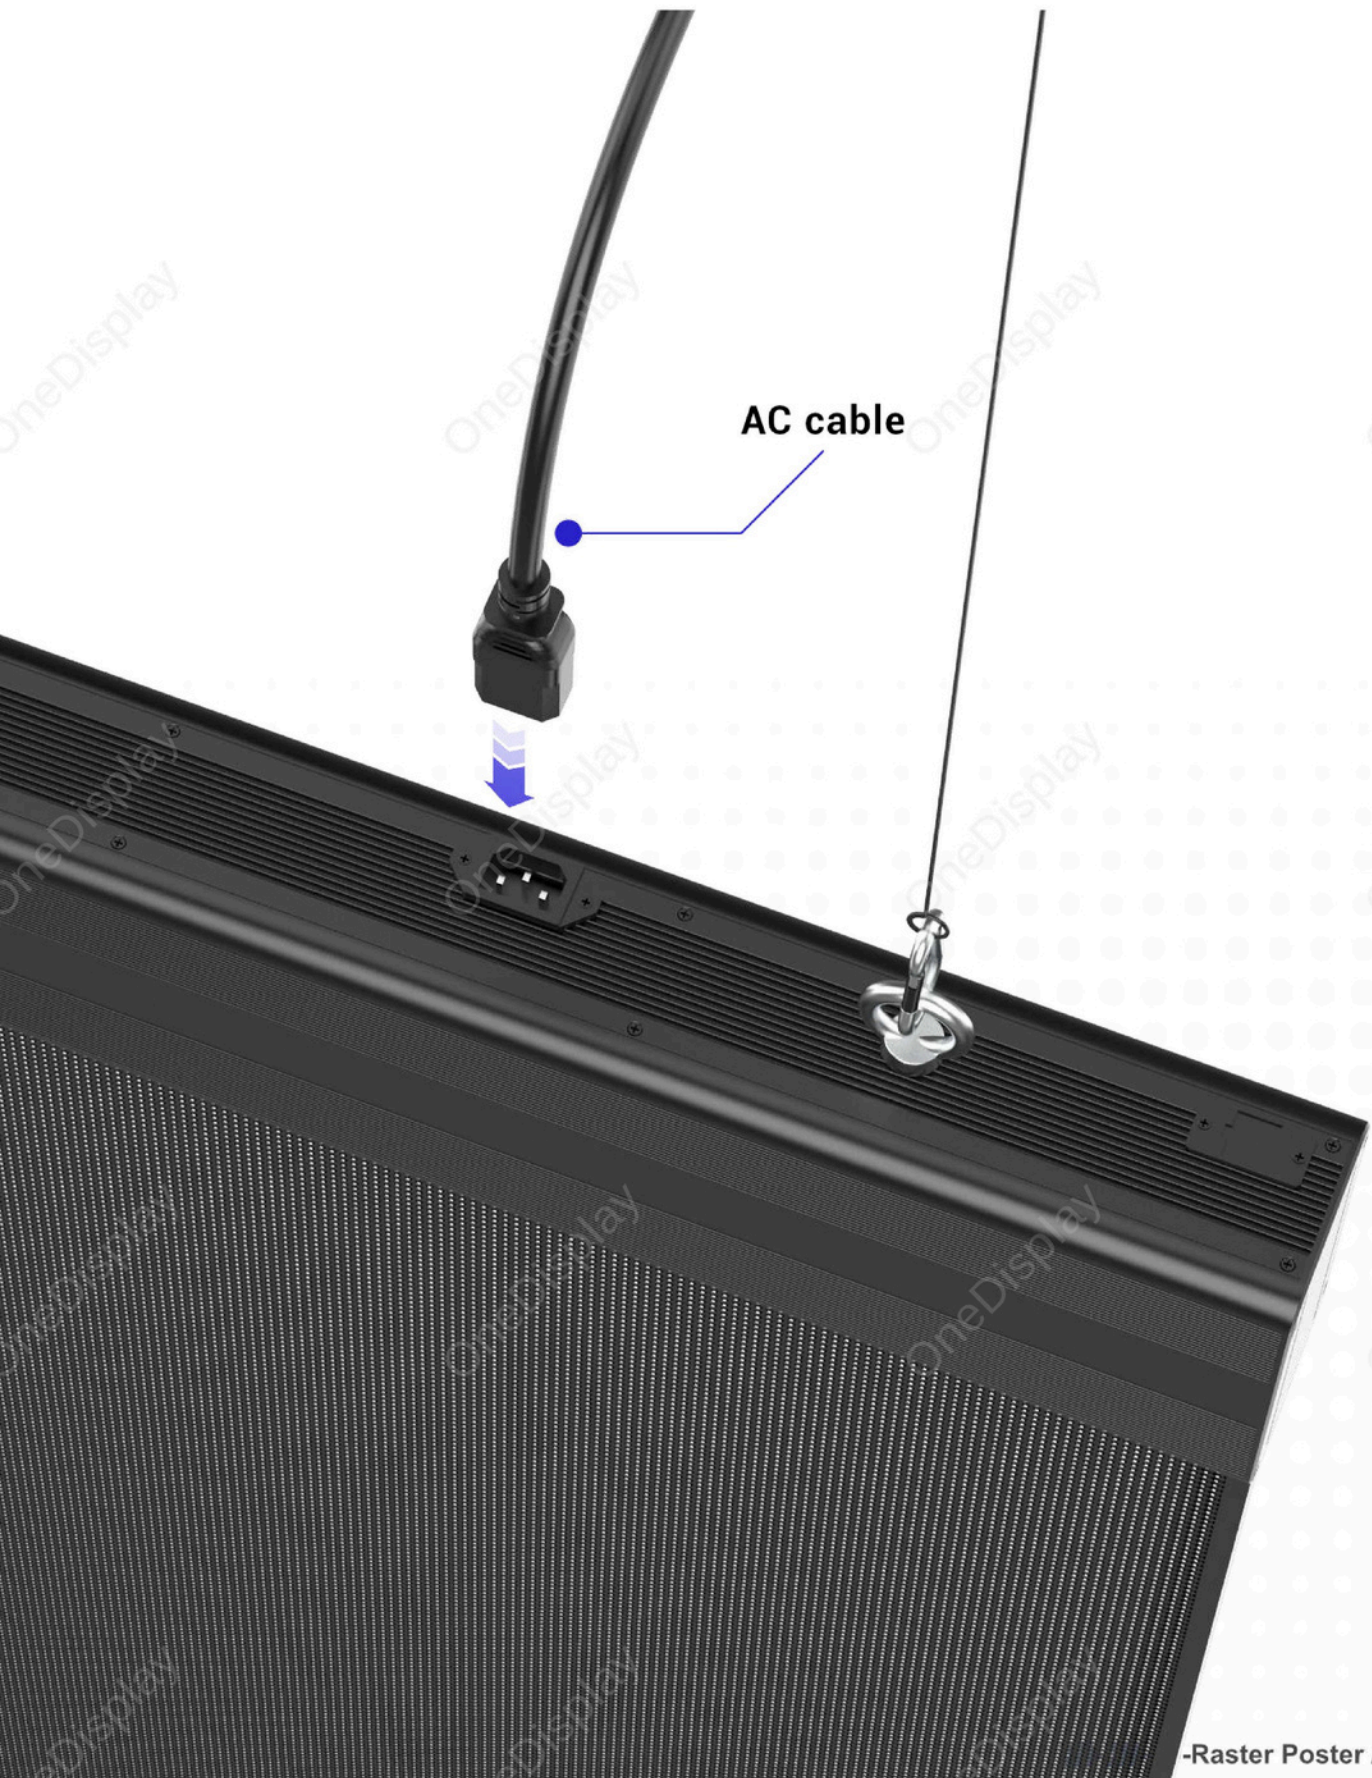

-Raster Poster / SERIES

Multiple Connection Methods

It can be connected by PC or cell phone through network cable, hdmi, wifi, etc. It supports wireless uploading of pictures and videos, which can be used immediately.




Network



HDMI



WIFI

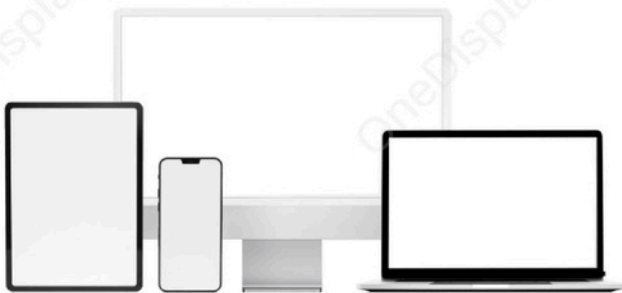

Computer/Mobile/Laptop



Controller



All-in-One Machine

1. Turn on the screen


Firstly, please turn on the video controller processor, after successful operation, then turn on the power supply of the screen.

2. Turn off the screen

Firstly, please turn off the power supply of the screen, then quit the control software, and turn off the control computer power supply of the screen.

High-Definition And Transparent

Enjoy vibrant, high-definition visuals with unmatched transparency. The screen's high brightness ensures excellent visibility, while its transparency allows natural light to pass through, maintaining a bright and inviting atmosphere indoors.

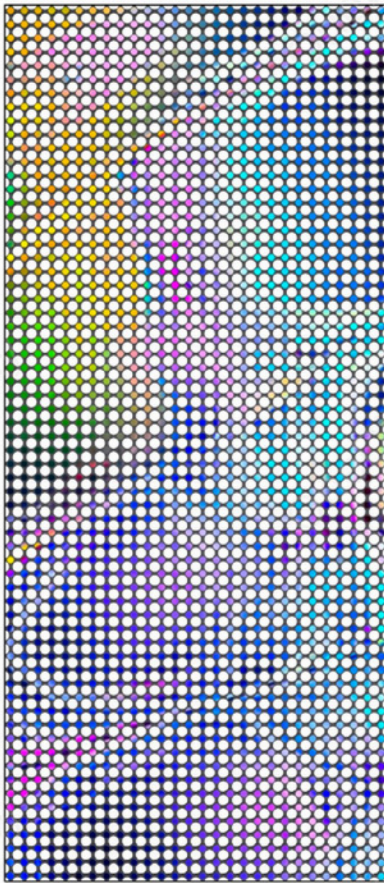

Intelligent color accuracy evaluation
Eliminate color deviation



Flexible Displacement

It can be easily installed on the ceiling or floor. The bottom features support feet for seamless movement. Adjust the position as needed and easily move it when required.

