



STREET CO'
DISPLAY SOLUTION EXPERT



KA SERIES

Professional Outdoor Interactive LED Floor



STREET CO'
DISPLAY SOLUTION EXPERT

www.streetcommunication.com

Interactive LED Floor Display Solutions

IP68

IP68-Professional waterproof design

10,000
CD/M²


High Brightness

10mm

Aluminum Plate



Cabinet Size

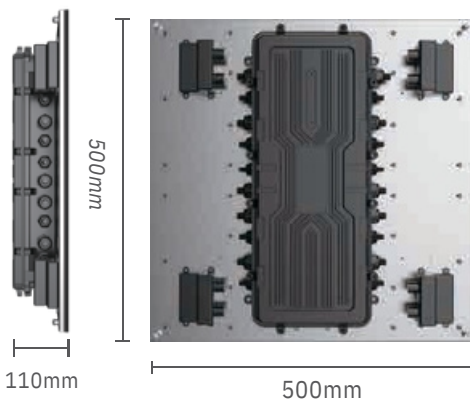


Selected Mask Material with surface Anti-skid & Anti-cratch treatment





- Selected Mask material, Anti-UV
- Surface Anti-skid, Anti-scratch design
- Waterproof design, IP68 protection
- Build-in Interactive IC
- Max. Brightness up to 10000nit



Patented Air-valve Design

Balance the air pressure between inside the module & power box and outside, while also avoid moisture in. It could improve the performance and extend the life span of the Floor LED screens.


Guid-Rail installation, Easy and Fast



Independent Power Box Design

Each signal and power connectors
IP68 waterproof designed independently

Project case

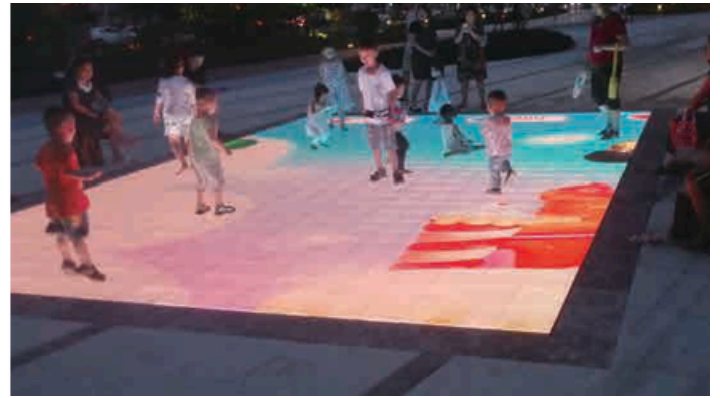

Specifications

Model Number	KA0225	KA0226	KA0229	KA0239	KA0248	KA0252	KA0262
Pixel Pitch (mm)	2.5	2.6	2.976	3.91	4.81	5.2	6.25
LED Configuration	SMD1415	SMD1415	SMD1415	SMD1921	SMD1921	SMD1921	SMD1921
Module Resolution	100 x 100 pixels	96 x 96 pixels	84 x 84 pixels	64 x 64 pixels	52 x 52 pixels	48 x 48 pixels	40x 40 pixels
Module Dimensions (W x H x D)(mm)	250 x 250 x 18	250 x 250 x 18	250 x 250 x 18	250 x 250 x 18	250 x 250 x 18	250 x 250 x 18	250 x 250 x 18
Cabinet Resolution	200 x 200 pixels	192 x 192 pixels	168 x 168 pixels	128 x 128 pixels	104 x 104 pixels	96 x 96 pixels	80 x 80 pixels
Cabinet Dimensions (W x H x D)(mm)	500 x 500 x 110	500 x 500 x 110	500 x 500 x 110	500 x 500 x 110	500 x 500 x 110	500 x 500 x 110	500 x 500 x 110
Contrast Ratio	>3,000:1	>3,000:1	>3,000:1	>3,000:1	>3,000:1	>3,000:1	>3,000:1
Brightness (cd/m ²)	900-1800	900-1800	900-1800	900-1800	900-3000	900-3000	900-10000
Max./Avg. Power (W/Cabinet)	200 / 100	200 / 100	200 / 100	200 / 100	200 / 100	200 / 100	200 / 100
Viewing Angle	160°/160°						
Operating Voltage	100-240V AC 50-60Hz						
Refresh Rate	3840Hz						
IP Rating	IP68/IP68						
(Front/Rear) (Kg/Cabinet)	14						
Cabinet Weight Cabinet Material	Aluminum						
Max Load-Bearing	2200 Kg						