




Specifications of Magic Stage 7S P3.9 Outdoor 500mmx500mm

MG7S Cabinet (Outdoor)

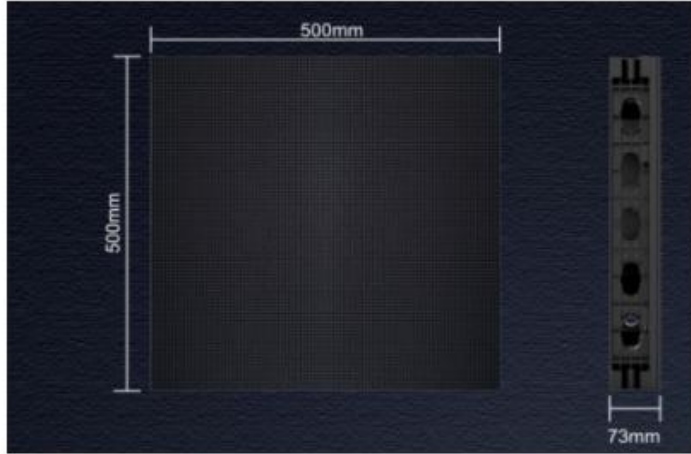

Accessories

Name	Hanging Bar	Steel Structure Connector	Curve Connector	Horizontal Connector	Vertical Connector	Push Bar
Picture						
Usage						

Technical Parameters

MG7S P3.9 outdoor 500*500mm

Cabinet Weight:	7.4 kg	
Module size	250mm×250mm	
Module resolution	64×64	
Quantity of module for one cabinet	4	
Material of cabinet	High polymer nanotechnology material	
Resolution of cabinet	128×128	
LED encapsulation	SMD 1515 white face copper wire led	
Luminance of White Balance:	4000-4200cd/m ²	5500-6000cd/m ²
Contrast ratio	3000:1	
Average Power Consumption:	200w/m ² .	280w/m ²
Maximum Power Consumption:	600w/m ²	840w/m ²
Viewing Distance:	> 4 m	

Viewing Angle:	H165°/V165°
Driving Method:	1/11 constant current drive 1/8 constant current drive
Pixel Density:	65536dot/m ²
Refresh Rate:	3840hz/s
Ingress protection	IP65/IP54
Grey Scale:	14 bit
Operating Environment Temperature:	-20~45 °C
Operating Environment Humidity:	10%~90%RH
Average No Failure Time:	>10,000 hours
Life-span:	>80,000hours
Out of Control Rate:	<0.00003
Certification	CE、 FCC
Control Mode:	Synchronous
Connection Method & Communication Distance:	network cable<100m, multi-mode fiber optic<500m, single-mode fiber optic>500m
Display Content:	Text, Graphics, Logo, Animation, live video, movie, Etc.