




Uslim II

Uslim II 1.5 creative indoor LED display



Product features:

1. Ultrathin and lightweight aluminum die casting structure with thickness of 39.6 mm
2. Three standard sizes of cabinets combined with corner arc screen and arc screen can realize different creative shapes such as Round-corner Square, Wave concave and convex arcs etc.
3. Impressive viewing experience with the peak brightness of 1000nits and the HDR visual effect*
4. Intelligent Operation and Maintenance*

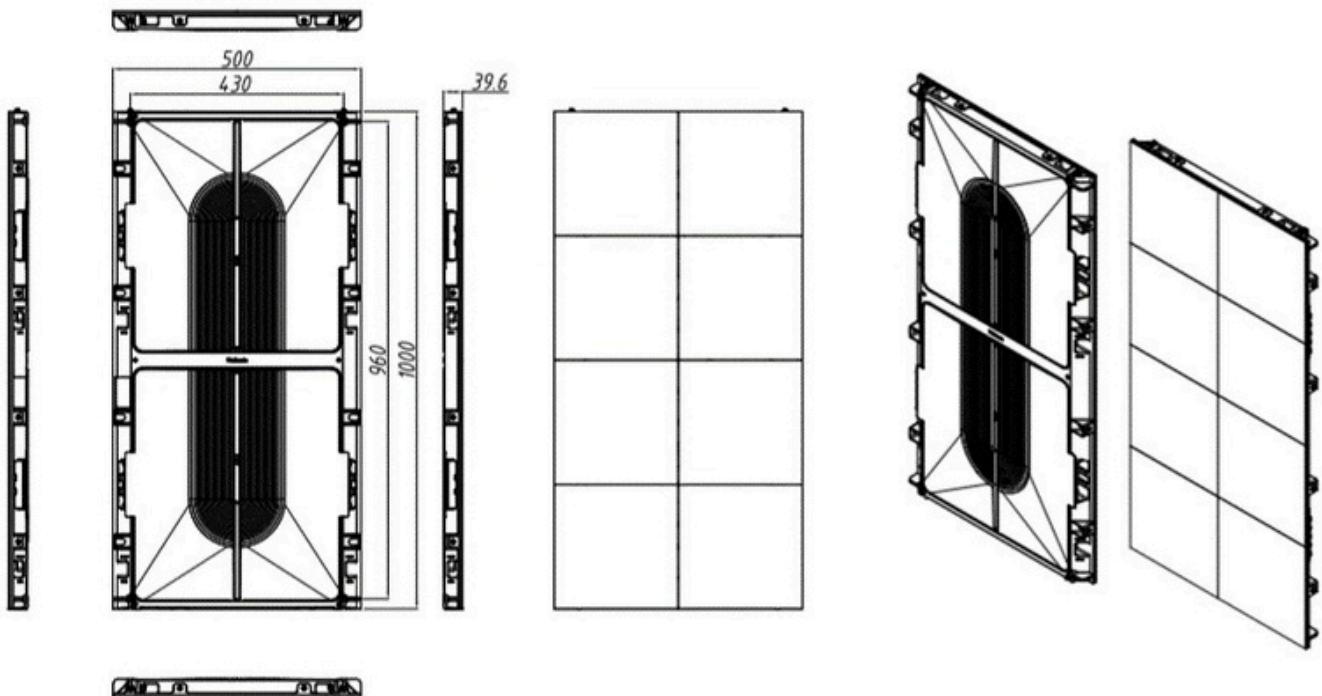

Main Technical Specifications:

Parameter	Value
Pixel Pitch	1.56mm
LED Type	3-in-1 SMD
Brightness	800cd/m ²
Pixel Density	409,600pixels/m ²
Pixels Per Panel	320*160/320*320/320*640 pixels
Module Size	250mm×250mm
Panel Size	500mm×250/500/1000mm×39.6mm
Weight	3.2/5.6/10.5kg/panel
Maintenance	Front and Rear
Ingress Protection	Front IP50/Rear IP10 Optional: Rear IP30
Curve	Customized according to customers' needs
Panel Area	0.125/0.25/0.5m ²
Planeness	≤0.2mm
Recommended Viewing Distance	≥1.5m
Environment	indoor
Material	Die-cast Aluminum
Calibration	Support brightness and chroma
Brightness Control	Manual/Automatic
Color Temperature	2,000K~9,300K Adjustable
Horizontal Viewing Angle	160°
Vertical Viewing Angle	160°
Contrast Ratio	5000:1
Input Power <Max>	500W/m ²
Input Power <Typical>	166W/m ²
Input Voltage	100~240VAC
Processing Depth	14bit
Refresh Rate	7680Hz
Video Frame Rate	50&60Hz
Input Power Frequency	50~60Hz
LED Life Time	100,000 Hours
Operating Temperature/Humidity	-10°C~+45°C/10~80%RH
Storage Temperature/Humidity	-20°C~+55°C/10~85%RH
Power Status	Diagnostic LEDs
Standard Mounting Configuration	Fixed/Floor-mounted/Hanging
Optional Mounting Configuration	Concave and Convex, Round shape, Corner Shape