


Lmate Series

LRS Product Introduction

Your Carefree Rental Application Solution

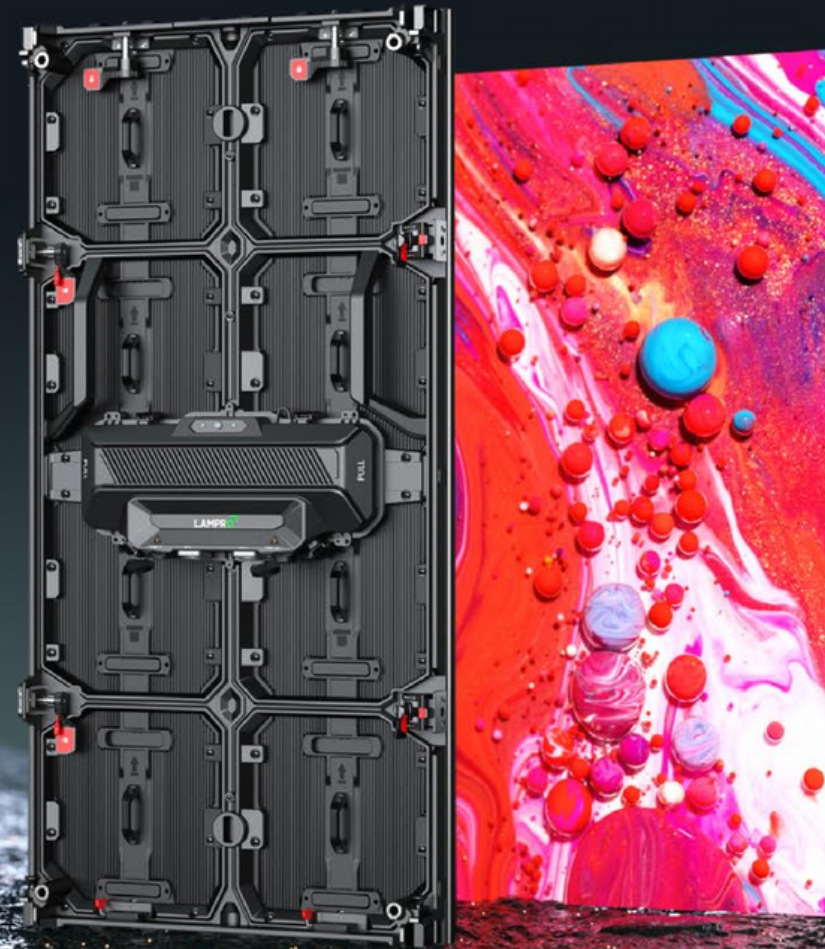

Parameter	Value				
Pixel Pitch(mm)	2.6	2.9	3.9	O3.9 (O=outdoor)	O4.8 (O=outdoor)
LED Type	3-in-1 SMD	3-in-1 SMD	3-in-1 SMD	3-in-1 SMD	3-in-1 SMD
Brightness (Cd/m ²)	800-1000			4500-5000	
Pixel Density (Pixels/m ²)	65,536	112,896	65,536	65,536	43,264
Module Size(W*H mm)	250 ×250/ 500			250 ×500	
Panel Size(W*H*D mm)	500 ×500/ 1000 ×74.2				
Weight (Kg/lbs)	7.5/11.5 kg				
Maintenance	Rear / Front			Rear	
Curve	Convex 10°-Concave 10°				
Material	Die-cast Aluminium				
Viewing Angle(H/V °)	170°/170°	160°/155°		160/160	
Contrast Ratio	7000: 1	6300: 1	5000: 1	5000: 1	
Input Power <Max>/<Typical>	465/155	460/153	450/150	600/200	590/197
(W/m ²) Processing Depth (Bit)	14/16(Optional)				
Refresh Rate (Hz)	3840 Hz			7680 Hz	
Standard Mounting Configuration	Hanging, Stacking				
Max hanging (Panels)	20/10				
Max stacking (Panels)	6/3				
Certification	CE/CB/ETL/FCC/RoHS				

Note:

1.Product pictures are for reference only, the actual product effects (including but not limited to appearance, color, size) may be slightly different, please refer to the actual product.

2.Thespecificationparametersarereferencevalues.PartofthedatacomesfromUnilumin'sinternallaboratoryandisobtainedunderaspecifictestenvironment.Inactualuse,itmaybeslightlydifferentduetoproductbatchdifferences,configurationdifferences,softwareversions,use conditions and environmental factors. Actual usage shall prevail.

3.Different configurations can achieve different refresh rates.