




**STREET CO'**  
DISPLAY SOLUTION EXPERT

# LED Flexible Transparent Film Display R Series

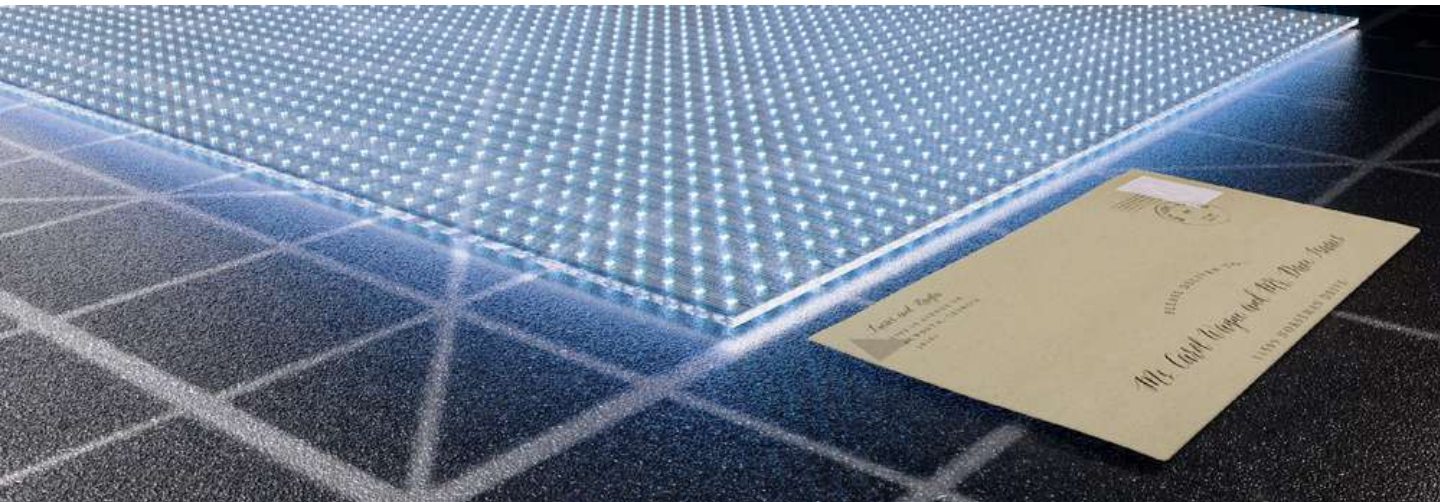

| Model                           | P6.25                                  |  | P8                                     |  |
|---------------------------------|--|--|--|--|
|                                 | General Brightness (standards)         | High Brightness (customize)            | General Brightness (standards)         | High Brightness (customize)            |
| Module size(mm)                 | 1000*400                               | 1000*400                               | 1000*400                               | 1000*400                               |
| LED light                       | REE1515                                | REE2121                                | REE1515                                | REE2121                                |
| Pixel composition               | R1G1B1                                 | R1G1B1                                 | R1G1B1                                 | R1G1B1                                 |
| Pixel spacing(mm)               | 6.25*6.25                              | 6.25*6.25                              | 8*8                                    | 8*8                                    |
| Module pixel                    | 160*64=10240                           | 160*64=10240                           | 125*50=6250                            | 125*50=6250                            |
| Pixel/m <sup>2</sup>            | 25600                                  | 25600                                  | 15625                                  | 15625                                  |
| Brightness(cd/ m <sup>2</sup> ) | 2500                                   | 4000                                   | 2000                                   | 4000                                   |
| Permeability                    | 90%                                    | 85%                                    | 92%                                    | 87%                                    |
| View angle                      | 160°                                   | 160°                                   | 160°                                   | 160°                                   |
| Input power                     | AC110-240V50/ 60Hz                     | AC110-240V50/ 60Hz                     | AC110-240V50/ 60Hz                     | AC110-240V50/ 60Hz                     |
| Peak power                      | 600w/m <sup>2</sup>                    | 600w/m <sup>2</sup>                    | 600w/m <sup>2</sup>                    | 600w/m <sup>2</sup>                    |
| Average power                   | 200w/m <sup>2</sup>                    | 200w/m <sup>2</sup>                    | 200w/m <sup>2</sup>                    | 200w/m <sup>2</sup>                    |
| Work environment                | Temperature - 20~55<br>Humidity 10-90% | Temperature - 20~55<br>Humidity 10-90% | Temperature - 20~55<br>Humidity 10-90% | Temperature - 20~55<br>Humidity 10-90% |
| Weight                          | 1.3kg                                  | 1.3kg                                  | 1.3kg                                  | 1.3kg                                  |
| Thickness                       | 2.5mm                                  | 2.5mm                                  | 2.5mm                                  | 2.5mm                                  |
| Drive mode                      | static state                           | static state                           | static state                           | static state                           |
| Control system                  | Nova/Colorlight                        | Nova/Colorlight                        | Nova/Colorlight                        | Nova/Colorlight                        |
| Typical value of life           | 100000H                                | 100000H                                | 100000H                                | 100000H                                |
| Grayscale level                 | 16bit                                  | 16bit                                  | 16bit                                  | 16bit                                  |
| Refresh rate                    | 3840 Hz                                | 3840 Hz                                | 3840 Hz                                | 3840 Hz                                |

Size can be customized.



| Model                          | P10                                   |                                       | P15                                   |                                       |
|--------------------------------|---------------------------------------|---------------------------------------|---------------------------------------|---------------------------------------|
|                                | General Brightness (standards)        | High Brightness (customize)           | General Brightness (standards)        | High Brightness (customize)           |
| Module size(mm)                | 1000*400                              | 1000*400                              | 990*390                               | 990*390                               |
| LED light                      | REE1515                               | REE2121                               | REE2121                               | REE2121                               |
| Pixel composition              | R1G1B1                                | R1G1B1                                | R1G1B1                                | R1G1B1                                |
| Pixel spacing(mm)              | 10*10                                 | 10*10                                 | 15*15                                 | 15*15                                 |
| Module pixel                   | 100*40=4000                           | 100*40=4000                           | 66*26=1716                            | 66*26=1716                            |
| Pixel/m <sup>2</sup>           | 10000                                 | 10000                                 | 4356                                  | 4356                                  |
| Brightness(cd/m <sup>2</sup> ) | 2000                                  | 4000                                  | 2000                                  | 4000                                  |
| Permeability                   | 94%                                   | 89%                                   | 94%                                   | 94%                                   |
| View angle                     | 160°                                  |                                       |                                       | 160°                                  |
| Input power                    | AC110-240V50/60Hz                     |                                       | AC110-240V50/60Hz                     | AC110-240V50/60Hz                     |
| Peak power                     | 600w/m <sup>2</sup>                   | 600w/m <sup>2</sup>                   | 600w/m <sup>2</sup>                   | 600w/m <sup>2</sup>                   |
| Average power                  | 200w/m <sup>2</sup>                   | 200w/m <sup>2</sup>                   | 200w/m <sup>2</sup>                   | 200w/m <sup>2</sup>                   |
| Work environment               | Temperature- 20~55<br>Humidity 10-90% | Temperature- 20~55<br>Humidity 10-90% | Temperature- 20~55<br>Humidity 10-90% | Temperature- 20~55<br>Humidity 10-90% |
| Weight                         | 1.3kg                                 | 1.3kg                                 | 1.3kg                                 | 1.3kg                                 |
| Thickness                      | 2.5mm                                 | 2.5mm                                 | 2.5mm                                 | 2.5mm                                 |
| Drive mode                     | static state                          | static state                          | static state                          | static state                          |
| Control system                 | Nova/Colorlight                       | Nova/Colorlight                       | Nova/Colorlight                       | Nova/Colorlight                       |
| Typical value of life          | 100000H                               | 100000H                               | 100000H                               | 100000H                               |
| Grayscale level                | 16bit                                 | 16bit                                 | 16bit                                 | 16bit                                 |
| Refresh rate                   | 3840 Hz                               | 3840 Hz                               | 3840 Hz                               | 3840 Hz                               |

Size can be customized.



| Model                          | P20                                   |                                       |
|--------------------------------|---------------------------------------|---------------------------------------|
|                                | General Brightness<br>(standards)     | High Brightness<br>(customize)        |
| Module size(mm)                | 1000*400                              | 1000*400                              |
| LED light                      | REE2121                               | REE2121                               |
| Pixel composition              | R1G1B1                                | R1G1B1                                |
| Pixel spacing(mm)              | 20*20                                 | 20*20                                 |
| Module pixel                   | 50*20=1000                            | 50*20=1000                            |
| Pixel/m <sup>2</sup>           | 2500                                  | 2500                                  |
| Brightness(cd/m <sup>2</sup> ) | 2000                                  | 4000                                  |
| Permeability                   | 95%                                   | 95%                                   |
| View angle                     | 160°                                  | 160°                                  |
| Input power                    | AC110-240V50/ 60Hz                    | AC110-240V50/ 60Hz                    |
| Peak power                     | 600w/m <sup>2</sup>                   | 600w/m <sup>2</sup>                   |
| Average power                  | 200w/m <sup>2</sup>                   | 200w/m <sup>2</sup>                   |
| Work environment               | Temperature- 20~55<br>Humidity 10-90% | Temperature- 20~55<br>Humidity 10-90% |
| Weight                         | 1.3kg                                 | 1.3kg                                 |
| Thickness                      | 2.5mm                                 | 2.5mm                                 |
| Drive mode                     | static state                          | static state                          |
| Control system                 | Nova/Colorlight                       | Nova/Colorlight                       |
| Typical value of life          | 100000H                               | 100000H                               |
| Grayscale level                | 16bit                                 | 16bit                                 |
| Refresh rate                   | 3840 Hz                               | 3840 Hz                               |

Size can be customized.

