


# UpadIII2


500mm×500mm Indoor

Die-cast Aluminum LED Display Unit

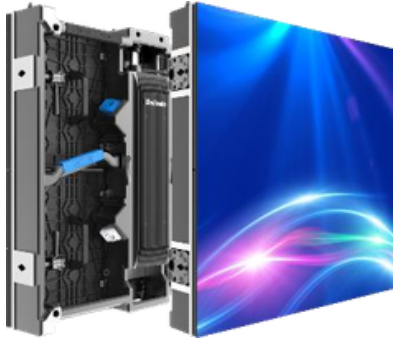

Product features :

1. One person handling.
2. High-precision die-cast angle block.
3. Aid climbable design.

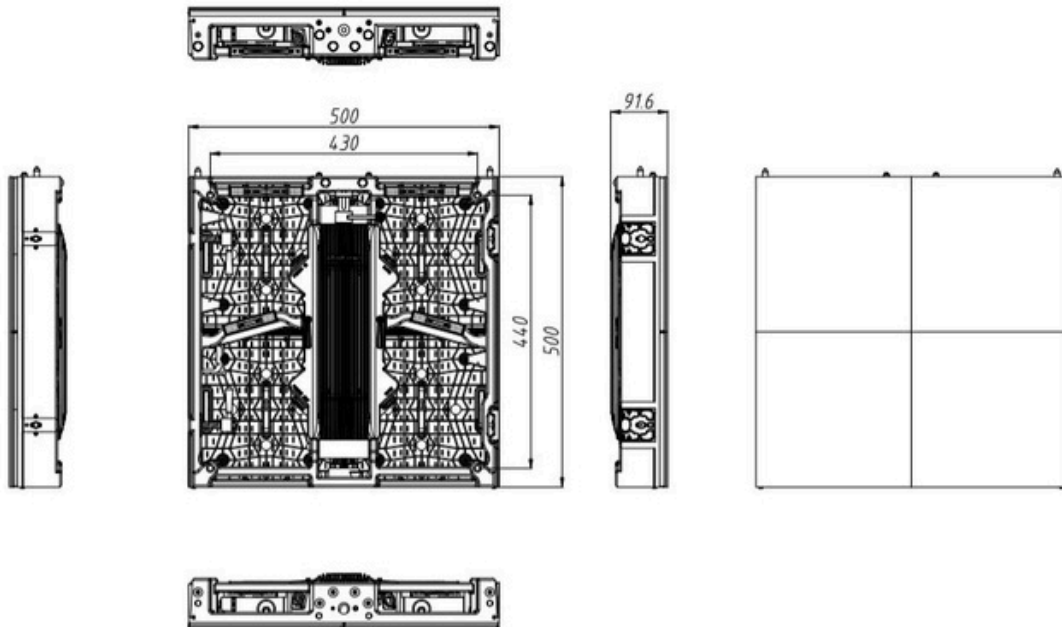

## Main Technical Specifications :

<b>Parameter</b>	<b>Value</b>
<b>Pixel Pitch</b>	2.6mm
<b>LED Type</b>	3-in-1 Black SMD
<b>Brightness</b>	800 cd/m <sup>2</sup>
<b>Pixel Density</b>	147,456 pixels/m <sup>2</sup>
<b>Pixels Per Panel</b>	192×192 pixels
<b>Module Size</b>	W250mm×H250mm
<b>Panel Size</b>	W500mm×H500mm×D91.6mm
<b>Weight</b>	9 kg/panel
<b>Maintenance</b>	Rear
<b>Ingress Protection</b>	IP30
<b>Curve</b>	(Convex) -5°~+10°(Concave) (Optional)
<b>Aspect Ratio</b>	1:1
<b>Panel Area</b>	0.25 m <sup>2</sup>
<b>Planeness</b>	≤0.3mm
<b>Recommended Viewing Distance</b>	≥2.6m
<b>Environment</b>	Indoor
<b>Material</b>	Die-cast Aluminum
<b>Calibration</b>	Support Brightness and Chroma
<b>Brightness Control</b>	Manual/Automatic
<b>Color Temperature</b>	2,000K-9,300K Adjustable
<b>Horizontal Viewing Angle</b>	140°
<b>Vertical Viewing Angle</b>	120°
<b>Contrast Ratio</b>	3,000:1
<b>Input Power &lt;Max&gt;</b>	120 W/panel
<b>Input Power &lt;Typical&gt;</b>	40 W/panel
<b>Input Voltage</b>	100~240 VAC
<b>Processing Depth</b>	14 bit
<b>Scan Method</b>	1/16
<b>Refresh Rate</b>	3840 Hz
<b>Video Frame Rate</b>	50/60 Hz
<b>Input Power Frequency</b>	50~60 Hz
<b>LED Life Time</b>	100,000 Hours
<b>Operating Temperature/Humidity</b>	-10°C~+45°C/10~80%RH
<b>Storage Temperature/Humidity</b>	-20°C~+50°C/10~80%RH
<b>Power Status</b>	Diagnostic LEDs
<b>Standard Mounting Configuration</b>	Hanging, Stacking
<b>Certification</b>	TUV-CE/UL/CB/FCC/IC/RoHS

**Note: Specifications are for reference only and are subject to change without notice.**

**Power consumption tolerance: ±15%, according to the actual situation.**