






UPADIII H —SERIES—

Safe and Fast


-  Slim & Lightweight
-  Easy Installation & Maintenance
-  HDR Processing Technology
-  Arc Shape
-  Professional Touring System



FEATURES

- Safe & Reliable
- Professional Touring System
- Quick Installation, Turnaround and Maintenance
- HDR Display Technology - Excellent Visual Effect
- 35% lighter, and Thinner
- Arc Shape - Creative Installation Achievable

APPLICATIONS

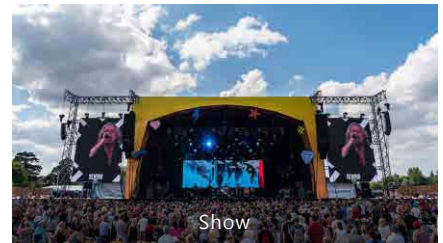

SPECIFICATIONS

Parameter	Value			
Model	UpadIII H03	UpadIII H04	UpadIII H05	UpadIII H07
Pixel Pitch	3.9 mm	4.8 mm	5.9 mm	7.8 mm
Environment	Outdoor	Outdoor	Outdoor	Outdoor
LED Type	3-in-1 SMD	3-in-1 SMD	3-in-1 SMD	3-in-1 SMD
Brightness	5,000 cd/m ²	5,000 cd/m ²	5,000 cd/m ²	5,000 cd/m ²
Pixel Density	65,536 pixels/m ²	43,264 pixels/m ²	28,224 pixels/m ²	16,384 pixels/m ²
Module Size (W×H)	250 × 500 mm	250 × 500 mm	250 × 500 mm	250 × 500 mm
Panel Size (W×H×D)	500 × 500 × 74.2 mm	500 × 500 × 74.2 mm	500 × 500 × 74.2 mm	500 × 500 × 74.2 mm
	500 × 1,000 × 74.2 mm	500 × 1,000 × 74.2 mm	500 × 1,000 × 74.2 mm	500 × 1,000 × 74.2 mm
Panel Resolution	128 × 128 dots	104 × 104 dots	84 × 84 dots	64 × 64 dots
	128 × 256 dots	104 × 208 dots	84 × 168 dots	64 × 128 dots
Panel Weight	6.3 kg	6.3 kg	6.3 kg	6.3 kg
	11 kg	11 kg	11 kg	11 kg
Frame Weight	6.1 kg	6.1 kg	6.1 kg	6.1 kg
	9.5 kg	9.5 kg	9.5 kg	9.5 kg
Material	Die-cast Magnesium & Carbon Fiber	Die-cast Magnesium & Carbon Fiber	Die-cast Magnesium & Carbon Fiber	Die-cast Magnesium & Carbon Fiber
Ingress Protection	IP65	IP65	IP65	IP65
Operating Temperature/Humidity	-20°C to 50°C/10% - 90% RH	-20°C to 50°C/10% - 90% RH	-20°C to 50°C/10% - 90% RH	-20°C to 50°C/10% - 90% RH
Maintenance	Rear	Rear	Rear	Rear
Curve (Convex - Concave)	-5° to 15°	-15° to 15°	-15° to 15°	-15° to 15°
Viewing Angle (H/V)	140°/120°	140°/120°	140°/120°	140°/120°
Contrast Ratio	3,000:1	4,000:1	5,000:1	6,000:1
Input Power/Panel (Max.)	180 W	180 W	180 W	180 W
	350 W	350 W	350 W	350 W
Input Power/Panel (Ave.)	60 W	60 W	60 W	60 W
	110 W	110 W	110 W	110 W
Refresh Rate	3,840 Hz	3,840 Hz	3,840 Hz	3,840 Hz
Input Voltage	100 - 240 VAC	100 - 240 VAC	100 - 240 VAC	100 - 240 VAC
Input Power Frequency	50 - 60 Hz	50 - 60 Hz	50 - 60 Hz	50 - 60 Hz
Standard Mounting Configuration	Hanging, Stacking	Hanging, Stacking	Hanging, Stacking	Hanging, Stacking
Certification	TUV-CE/UL/FCC/CB/IC/RoHS	TUV-CE/UL/FCC/CB/IC/RoHS	TUV-CE/UL/FCC/CB/IC/RoHS	TUV-CE/UL/FCC/CB/IC/RoHS

Note: Specifications are for reference only and are subject to change without notice.

DIMENSIONS

