



Heavy-Duty T-Bolt Clamps – Type TBA and TBB

- Murray Heavy-Duty T-Bolt band clamps are designed to provide connections without leaks in applications that require additional installation torque and strength.
- Typically used in agriculture, center pivot irrigation, marine, heavy-duty truck, and severe service industrial applications.
- Available in two styles:
 - TBA series – welded band tongue under the bolt
 - TBB series – floating "channel" bridge under the bolt
- Both TBA and TBB series have 5/16" diameter bolts, .875" wide, and .040" thick bands, providing a considerably heavier-duty construction than standard T-Bolt band clamps.
- Heat-treated alloy steel bolts and self-locking nuts are double plated clear chromate finished for high corrosion resistance. All other clamp components are 300 series bright finished stainless steel.

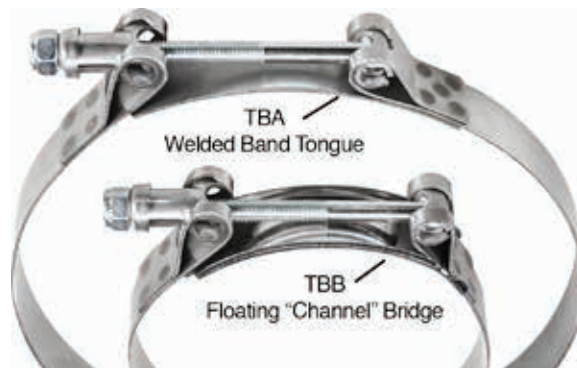


| TBA Series | TBB Series | Size Number | Open Dia. | Closed Dia. | Hose Size Ref. |
|------------|------------|-------------|-----------|-------------|----------------|
| TBA415 | TBB415 | 400 | 4.15 | 3.75 | 4" |
| TBA440 | TBB440 | 425 | 4.40 | 4.00 | 4" |
| TBA465 | TBB465 | 450 | 4.65 | 4.25 | 4-1/2" |
| TBA490 | TBB490 | 475 | 4.90 | 4.50 | 4-1/2" |
| TBA503 | TBB503 | 488 | 5.03 | 4.63 | 4-1/2" |
| TBA515 | TBB515 | 500 | 5.15 | 4.75 | 5" |
| TBA540 | TBB540 | 525 | 5.40 | 5.00 | 5" |
| TBA546 | TBB546 | 531 | 5.46 | 5.06 | 5" |
| TBA565 | TBB565 | 550 | 5.65 | 5.25 | 5-1/2" |
| TBA571 | TBB571 | 556 | 5.71 | 5.31 | 5-1/2" |
| TBA590 | TBB590 | 575 | 5.90 | 5.50 | 5-1/2" |
| TBA615 | TBB615 | 600 | 6.15 | 5.75 | 5-9/16" |
| TBA633 | TBB633 | 618 | 6.33 | 5.93 | 6" |
| TBA640 | TBB640 | 625 | 6.40 | 6.00 | 6" |
| TBA659 | TBB659 | 644 | 6.59 | 6.19 | 6" |
| TBA665 | TBB665 | 650 | 6.65 | 6.25 | 6-1/2" |
| TBA671 | TBB671 | 656 | 6.71 | 6.31 | 6-1/2" |
| TBA690 | TBB690 | 675 | 6.90 | 6.50 | 6-1/2" |
| TBA703 | TBB703 | 688 | 7.03 | 6.63 | 6-1/2" |
| TBA715 | TBB715 | 700 | 7.15 | 6.75 | 6-5/8" |
| TBA721 | TBB721 | 706 | 7.21 | 6.81 | 6-5/8" |
| TBA727 | TBB727 | 712 | 7.27 | 6.87 | 6-5/8" |
| TBA734 | TBB734 | 719 | 7.34 | 6.94 | 6-5/8" |
| TBA740 | TBB740 | 725 | 7.40 | 7.00 | 6-5/8" |
| TBA750 | TBB750 | 735 | 7.50 | 7.10 | 6-5/8" |
| TBA815 | TBB815 | 800 | 8.15 | 7.75 | 8" |
| TBA859 | TBB859 | 844 | 8.59 | 8.19 | 8" |
| TBA865 | TBB865 | 850 | 8.65 | 8.25 | 8-1/2" |
| TBA871 | TBB871 | 856 | 8.71 | 8.31 | 8-1/2" |
| TBA877 | TBB877 | 862 | 8.77 | 8.37 | 8-1/2" |
| TBA885 | TBB885 | 870 | 8.85 | 8.45 | 8-1/2" |
| TBA905 | TBB905 | 890 | 9.05 | 8.65 | 8-1/2" |
| TBA933 | TBB933 | 918 | 9.33 | 8.93 | 8-5/8" |
| TBA940 | TBB940 | 925 | 9.40 | 9.00 | 8-5/8" |
| TBA1059 | TBB1059 | 1044 | 10.59 | 10.19 | 10" |
| TBA1077 | TBB1077 | 1062 | 10.77 | 10.37 | 10" |
| TBA1084 | TBB1084 | 1069 | 10.84 | 10.44 | 10" |
| TBA1090 | TBB1090 | 1075 | 10.90 | 10.50 | 10-3/4" |
| TBA1094 | TBB1094 | 1079 | 10.94 | 10.54 | 10-3/4" |
| TBA1105 | TBB1105 | 1090 | 11.05 | 10.65 | 10-3/4" |

TBA

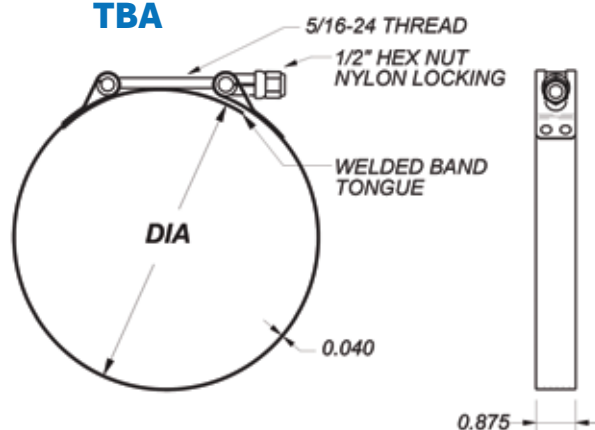

TBB

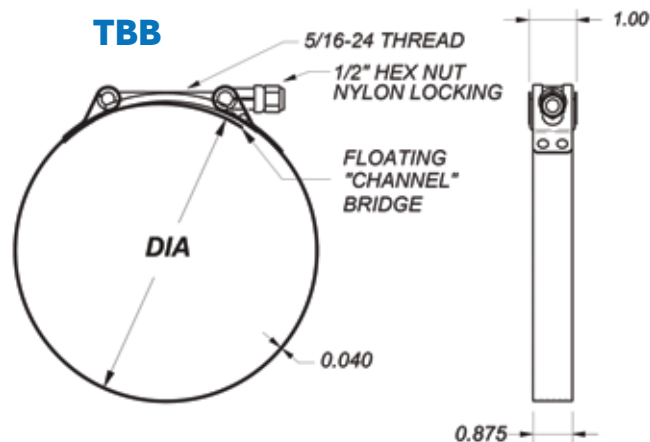

Recommended Installation Torque: 100 in-lb
 Bolt Threading: 5/16-24
 Nut: 1/2" Nylon Lock Nut



Email Your Purchase Order
 to orderentry@murraycorp.com