## Pre-framed Garden Specifications















#### Declare.









#### \_\_fitwel Healthier Hospitals



### **Garden Panel Components:**

- 1. Preserved Plants: Preserved Moss, Forest, Grass, Fern, Eucalyptus, Flower Foliage & Hydrangea species.
- 2. Backing Board: ¼" thick maple plywood laminated with formaldehyde-free (NAF-No-added formaldehyde), soy-based assembly process.
- 3. Adhesive: A solvent-free adhesive that meets the strict requirements of Indoor Environmental Quality (IEQ).
- 4. Framed Box/Rectilinear: 3/4" thick, 3" deep wood. See frame color options on page 2
  - a. Rectangular: Maximum size 48" x 96"
  - b. Triangular: Maximum 48" height
  - c. Hexagonal: Maximum 48" width
- 5. Framed Box/Curvilinear: 3/4" thick, 3" deep wood. Maximum 48" Diameter. See frame color options on page 3

While all gardens are custom created, it's important to maintain the structural integrity & morphology of the preserved plants used. To maintain the utmost longevity and visual standards, below are the requirements for sizes:

#### Model Size/Minimum Tier 1 12" minimum. Sizes 6" – 12" is priced at Special Tier level. Less than 6" not possible Special 4" minimum for Lichen Moss and 6" minimum for Flat Moss canvas designs Tier Tier 2 6" minimum. Preserved plant selection may be limited due to scale

#### Weight:

lbs 1.4 - 1.8/sqft depending on preserved plants and Model# selection (excludes add on frame weight).

#### How to Specify:

- ✓ **Pattern** is rendered by Garden on the Wall for approval as a part of the submittal process.
- √ Color/Plant Species TBD during Design Rendering as a part of the submittal process.
- ✓ Size TBD per CD. All dimensions will be coordinated with Shop Drawings and will be verified in the field.
- √ Frame Color TBD during shop drawings coordination as part of the submittal process

#### Installation & Edge Details:

- √ Wall Cleat will be provided by Garden on the Wall
- √ Wall Cleat should be attached to:
  - 34" thick plywood backing placed behind the drywall (to be provided by GC)
  - · In the absence of plywood backing or blocking, Wall Cleat Piece should be attached to studs for secure attachment. See enclosed specifications for additional dimensional and installation details on pages 2, 3, and 4
- √ If installed by General Contractor/Others:
  - Contents of the crate should be emptied immediately upon arrival
  - · Garden Panels need to be stored and displayed per GOTW's Care & Display Instructions
  - High resolution images of the installation to be provided to Garden on the Wall for issuance of the 5-Year Warranty
- √ If installed by GOTW: A 5-Year Warranty certificate is to be issued by Garden on the Wall upon completion of installation.

#### Sustainability, Health & Safety Credentials with 3<sup>RD</sup> Party Testing:

- √ Published Health Product Declaration HPD (v 2.3).
- √ Red List Free.
- √ Flame Spread and Smoke Index per ASTM E84: Class 1 or A.
- √ Declare Label.
- √ 100% Biobased Carbon Content per ASTM 6866.
- √ Complies with:
  - California Department of Public Health (CDPH) VOC standards for both Classroom and Office Scenarios.
  - BREEAM Building Standards.
  - Healthy Hospitals Initiative (HHI).
- √ Listed in:
  - Mindful MATERIALS database.
  - Sustainable Minds Transparency Catalog.

#### Credit/Points Contribution:

- √ LEED® v4 and LEED® v4.1
- √ The WELL v2 Building Standard™
- √ fitwel®

#### **Spec Division**

Division 9 Special Wall Surfaces 097700.

3\_Part Spec available upon request.

#### NRC/Sound Absorption Test:

0.44 for all Model# Selections.
















## Pre-framed Garden Specifications 💋


ARRAN E

Preserved Gardens Crafted in Framed Box to be Installed with Wood Cleats

## Gardens with Moss Combinations

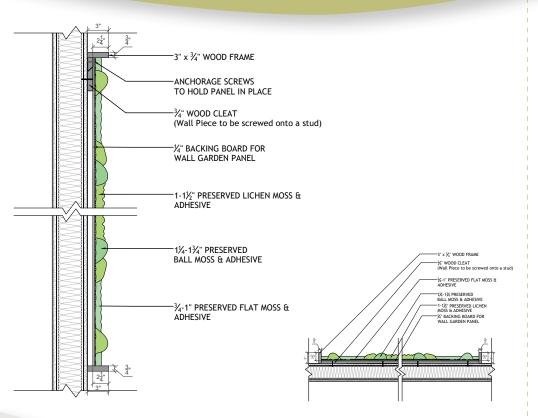

Gardens with Moss & Foliage (w/ Flower Foliage)

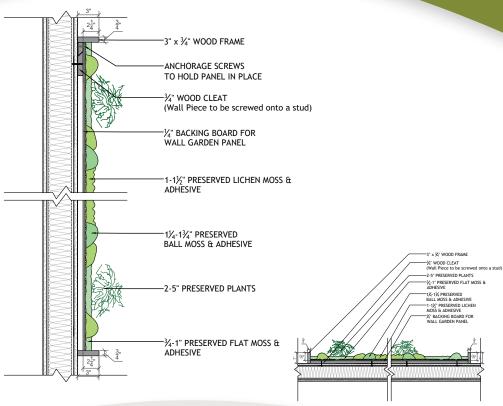

Tier 1 & Special Tier





## Pre-framed Garden Specifications 💋



Preserved Gardens Crafted in Framed Box to be Installed with Wood Cleats

# Gardens with Moss & Foliage (w/ Flower Foliage)

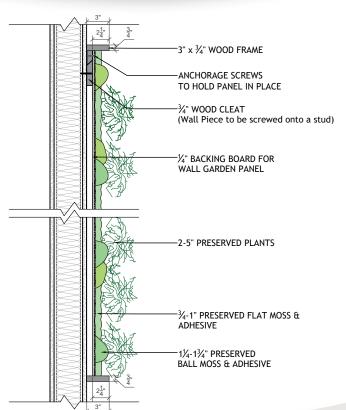



Tier 2



## Pre-framed Garden Specifications 🗶





Preserved Gardens Crafted in Framed Box to be Installed with Wood Cleats

34" thick and 3" deep wood







Anigre Wood



Flamed Maple

Rectilinear only



**Brushed White Oak** 



Brushed/Flamed White Oak



