



ANCHOR PRODUCTS®

Connections That Last

The U-Anchor 2000 series (KEE, PVC, and TPO) is a lightweight rooftop attachment system featuring a factory-welded plate and thermoplastic target membrane, encapsulated with a matching cover membrane for a watertight seal. It provides a manufacturer-accepted attachment for fully adhered or mechanically attached roofing systems and secures rooftop equipment quickly, safely, and effectively.



U-ANCHOR®

U2000



Front



Back

Equipment Attachment

- The U2000 Anchor is attached to a fully adhered or mechanically attached roofing system by hot air welding around the perimeter edge, consistent with the specified roofing manufacturer's hot air welding specifications.
- To securely mount your rooftop equipment to the U-Anchor, after it is installed, the connection nut must be fastened to approximately 20–25 lbf-ft. Use a calibrated torque wrench during the installation to ensure appropriate results are achieved. Excessive torque may damage the U-Anchor.
- Material Compatibility: The U-Anchor bolt is stainless steel and all attachments provided by Anchor Products are tested as a system and designed to be compatible.

Warranty

- 20 Year Guarantee on waterproofing or match of current roof warranty



U-Anchor Advantages

- Extremely strong; lightweight.
- Fast installation — installs in less than five minutes.
- Can be installed on surfaces from flat to vertical (parapet).
- Completely watertight when installed properly.



**ANCHOR
PRODUCTS®**
Connections That Last

Codes & Approvals



FM 4481 - Anchors
for roof mounted
equipment
FM Approval with
selected membranes



Product Specs

Tested in accordance with FM 4481
Section 4.1 over 1/2 Steel. Assembly-
specific results may vary. Please contact
Anchor Products® directly for additional
testing results and information.

• Bolt

3/8"-16 x 1-3/8" Bolt*
Material Type: 304 Stainless Steel

• Plate

Outer Diameter: 5.5"
Fastener Hole Diameter: 0.265" (8 holes)
Fastener Hole Pattern: 4.125" Diameter
Material Thickness: 0.047" (1.194mm)
Material Type: G90 Galvanized Steel

• Patents


Visit www.anchorproducts.com/resources/patents

Packaging Specs

- Sold Individually OR Full Box Quantity
- Individual Weight: Approx. 1.5 lbs.
- Full Box Quantity: 10 units
- Box Weight: Approx. 15.4 lbs.
- Box Dimensions: 17"x 11"x 17"
- Full Pallet Quantity: 32 boxes
- Pallet Dimensions: 40"x48"x 70"



U2000 Dimensional Drawing

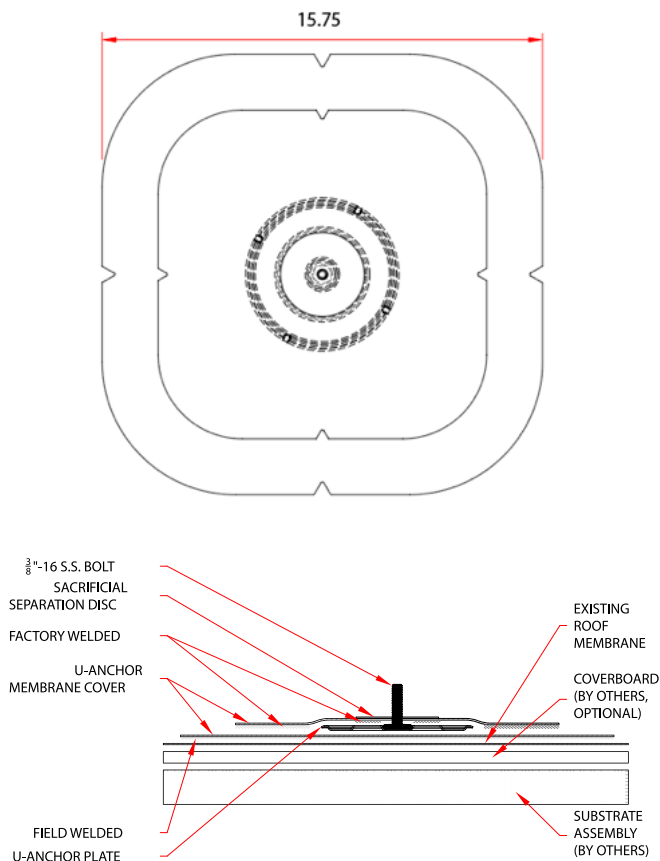

Membrane Options

TPO	ELEVATE, GEN FLEX, JM, MULE, HIDE, CARLISLE, DURO-LAST, GAF, IKO, VERSICO
PVC\KEE	ELEVATE, GEN FLEX, JM, MULE, HIDE, CARLISLE, DURO-LAST, FIBERTITE, FLEX, GAF, IB, IKO, SIK, SARNAPIL, VERSICO, WEATHER BOND
EDPM	ELEVATE, GEN FLEX, JM, MULE, HIDE, CARLISLE, VERSICO
APP	ELEVATE, GEN FLEX, JM, MULE, HIDE, CERTAINEED, DEBRIGUM, GAF, GARLAND, MALARKEY, POLYGLASS, SIPLAST, SOPREMA, TREMCO
SBS\TORCH	ELEVATE, GEN FLEX, JM, MULE, HIDE, CERTAINEED, DEBRIGUM, GAF, GARLAND, MALARKEY, POLYGLASS, SIPLAST, SOPREMA, TREMCO
BUR	ELEVATE, GEN FLEX, JM, MULE, HIDE, CERTAINEED, DEBRIGUM, GAF, GARLAND, MALARKEY, POLYGLASS, SIPLAST, SOPREMA, TREMCO



Call Us Now!
888-575-2131

[For Warranty Information](#)

anchorproducts.com

* Specified option is standard. Custom options may be available for additional charge. Lead times may apply depending on roofing manufacturer and product availability.

© Anchor Products

6316 Airport Fwy. Ste. D, Haltom City, TX 76117

Revised Aug 2025

Connections That Last

